


Vibro Hammer
电动锤系列



电动锤施工案例 Vibro Hammer Construction Cases

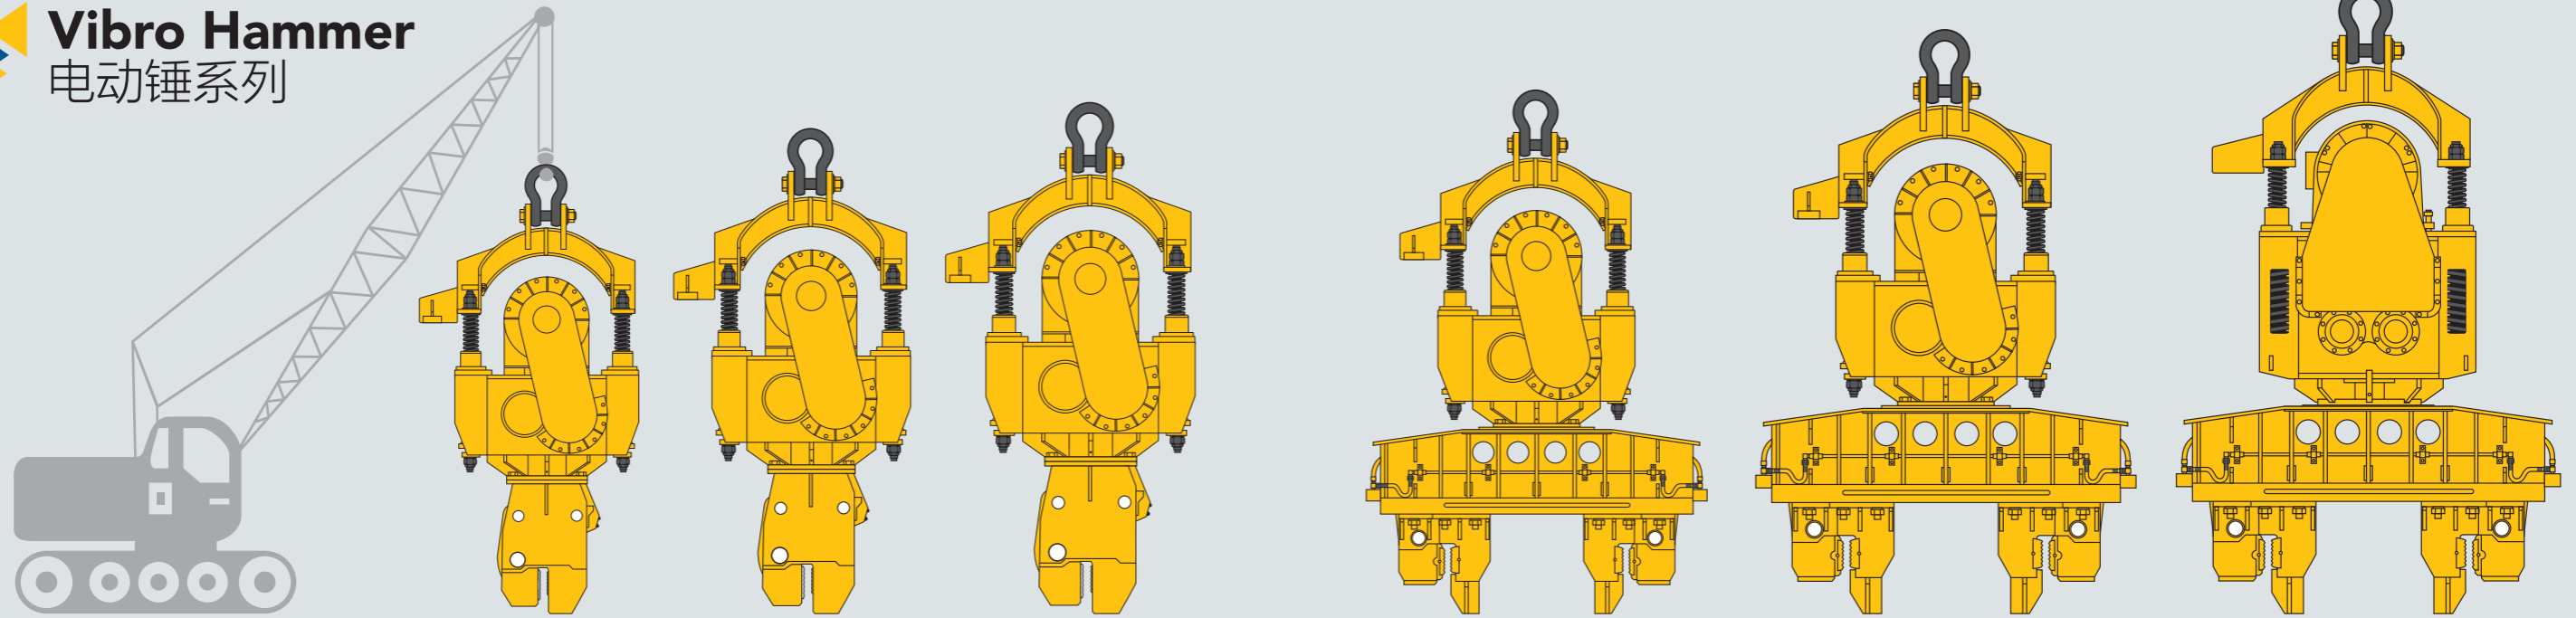

电动锤技术参数表 Technical Data Of Vibro Hammer

MODEL	DZ30A	DZ45A	DZ60A	DZ90A	DZ120A	DZ135A	DZ150A	DZ200A
Motor Power	30kW	45kW	60kW	90kW	120kW	135kW	150kW	200kW
Frequency	1050r/min	1100r/min	1000r/min	1050r/min	1000r/min	666r/min	940r/min	780r/min
Eccentric moment	192Nm	245Nm	360Nm	460Nm	700Nm	1220Nm	1000Nm	2400Nm
Centrifugal force	237kN	363kN	450kN	570kN	786kN	604kN	1000kN	1600kN
Amplitude	9.3mm	8.9mm	9.6/10mm	10.3mm	12.2mm	18.6mm	12.5mm	20mm
Max.Extraction Force	100kN	200kN	200kN	240kN	400kN	400kN	400kN	400kN
Overall Dimensions H	1.88m	2.12m	2.24m	2.56m	2.84m	3.1m	3.3m	4m
Overall Dimensions L	1.37m	1.29m	1.21m	1.53m	1.72m	1.72m	1.71m	1.65m
Overall Dimensions W	1.08m	1.23m	1.37m	1.1m	1.4m	1.4m	1.5m	1.9m
Total Weight	2800kg	3820kg	4320kg	6155kg	7596kg	9100kg	9535kg	14500kg
Wire cable	25mm ²	35mm ²	35mm ²	50mm ²	70mm ²	75mm ²	95mm ²	110mm ²
Clamp	Single	Single	Single	Single/Double	Single/Double	Single/Double	Single/Double	Single/Double
Diameter of the pile	/	/	/	∅ 500-1200mm	∅ 600-2000mm	∅ 600-2000mm	∅ 600-2500mm	∅ 700-3000mm
Generator capacity	≥ 120kW	≥ 150kW	≥ 200kW	≥ 300kW	≥ 350kW	≥ 400kW	≥ 450kW	≥ 600kW
Min crane capacity	≥ 20t	≥ 25t	≥ 35t	≥ 50t	≥ 70t	≥ 70t	≥ 80t	≥ 80t

Promotional materials are for reference only, all configuration with the contract or the material, as technology constantly updated, technical parameters are subject to change without prior notice