



# USER MANUAL

**L13**  
SMART LOCK

---

[www.smartleelen.com](http://www.smartleelen.com)

## Menu

### 1 Important Information

- 1.1 Security
- 1.2 Warning
- 1.3 Disposal Of Old Products And Batteries

### 2 Install The Lock

- 2.1 Product List
- 2.2 Installation Three-dimensional Assembly Drawing
- 2.3 Instructions Before Installation
- 2.4 Bolt Direction Reversing
- 2.5 Installation Video

### 3 Lock Appearance

- 3.1 Appearance

### 4 Set Up The Lock

- 4.1 Change Language Fastly
- 4.2 Enter The Management Mode
- 4.3 Add Unlocking Methods
- 4.4 Delete Unlocking Methods
- 4.5 Management Settings
- 4.6 System Settings

### 5 Use The Lock

- 5.1 Outdoor Locking/Unlocking
- 5.2 Indoor Locking/Unlocking

### 6 Other Functions

- 6.1 Restore Factory Settings
- 6.2 Battery Replacement
- 6.3 Emergency Power Supply Method
- 6.4 System Restart

### 7 Basic Parameters

### 8 Restricted Substances

### 9 Warranty Regulations

# 1 Important Information

## 1.1 Security

- Before using this smart lock, please read and understand all instructions. Damage caused by failure to follow the instructions is not covered by the warranty
- Suggest using accessories specified by our company
- Do not disassemble the product forcibly, so as not to sound an alarm or damage the product
- Do not scratch the fingerprint sensor with sharp objects, or it may cause permanent damage
- Do not expose the product to corrosive substances, so as not to damage the protective layer of the shell
- Do not hang objects on the handle, so as not to affect the normal use of the door lock
- To clean the product, please wipe it with a soft cloth
- Do not remove the battery while the device is in operation
- Please choose a professional engineer to install the door lock, and follow the company's installation standards, and do not disassemble or assemble by yourself
- After the door lock is installed and debugged, please modify the default management password set at the factory as soon as possible and keep the mechanical key properly, and do not disclose the password information easily
- After the door lock triggers the low battery alarm, please replace all batteries in time and make sure the installation is correct

## 1.2 Warning

- Do not put the battery near the fire, so as not to explode
  - Do not use an emergency power source that does not comply with safety regulations to power this product
  - Do not short-circuit the pole connections of the battery leads with metal as this may cause an explosion
  - Make sure to replace by LEELEN, LEELEN authorized service centers or professionals
  - Using accessories or components produced by other manufacturers or not specifically recommended by LEELEN may invalidate your warranty
- 


## 1.3 Disposal Of Old Products And Batteries

- Please understand the local electronic product classification collection system by yourself
- Please follow local regulations and do not dispose of old batteries in normal household waste
- Proper disposal of old products helps avoid potential negative impacts on the environment and human health
- Batteries cannot be disposed of with normal household waste

## 2 Install The Lock


### 2.1 Product List

This product list is for reference only, and everything is subject to the actual packaging content.

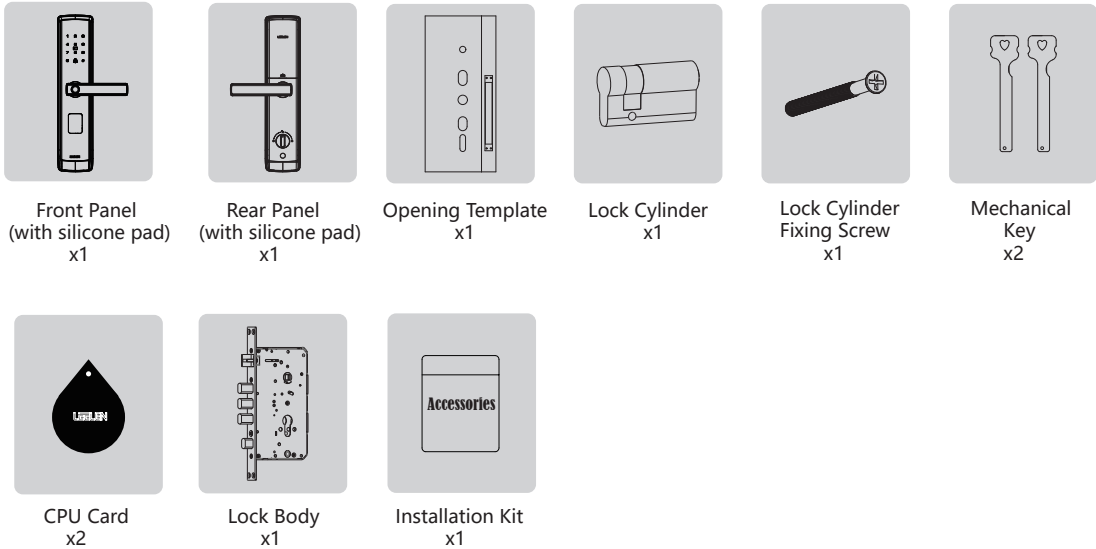


### 2.2 Installation Three-dimensional Assembly Drawing

Knowing the three-dimensional assembly diagram of the installation is conducive to understanding the structure of the lock.

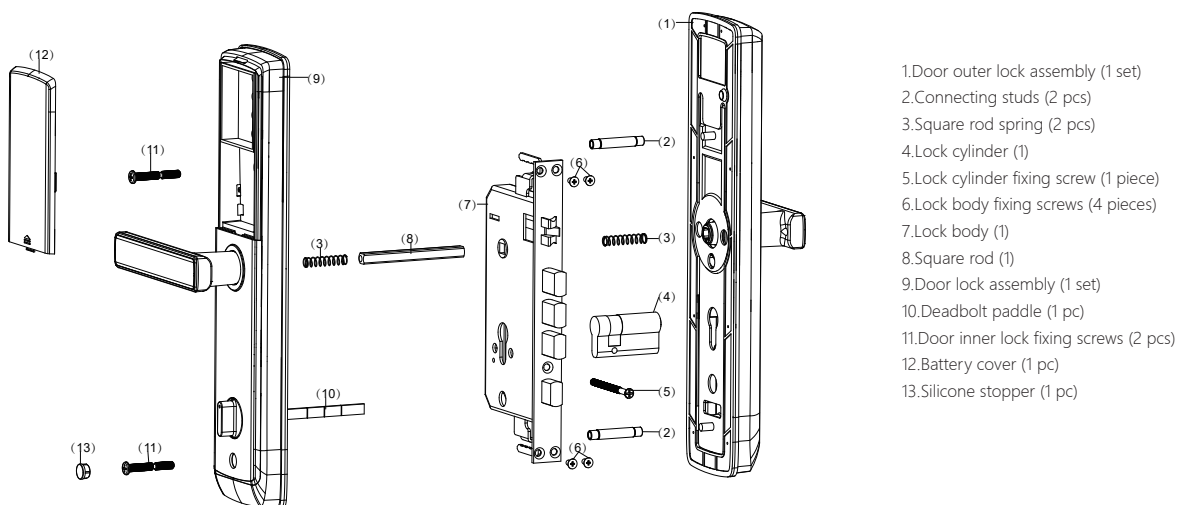


## 2.3 Instructions Before Installation

### 2.3.1 Confirm the door opening direction before installation

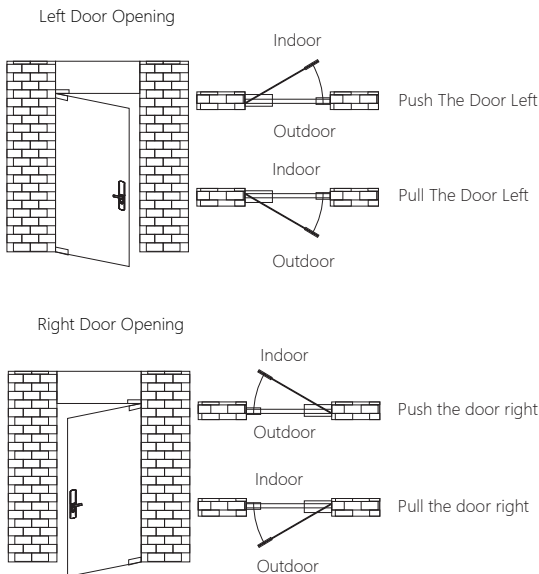


### 2.3.2 Corresponding lock body and bolt direction

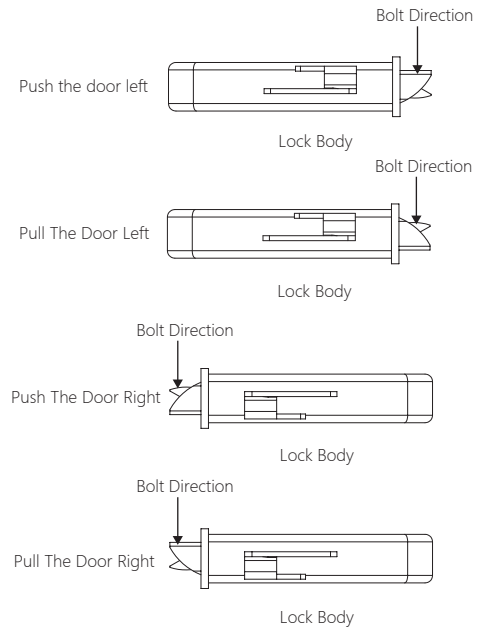

## 2.4 Bolt Direction Reversing

The lock body does not distinguish between push in and pull out. If you need to change the direction (that is, push in to pull out, or pull out to push in), please adjust the direction of the bolt before installation. The specific method is as follows:

- ① The main bolt remains locked
- ② Slightly lift outward, the bolt will automatically pop out of the side panel
- ③ Rotate the latch 180°
- ④ Press the bolt into the side panel after swiveling into position

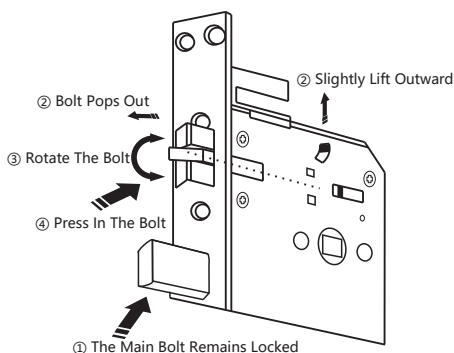


## 2.5 Installation Video

During the door lock installation process, it is necessary to try dangerous professional tools, so please be sure to hire a professional to install it. Before installation, please scan the QR code on the right, watch and follow the installation video to complete the installation.



## 3 Lock Appearance

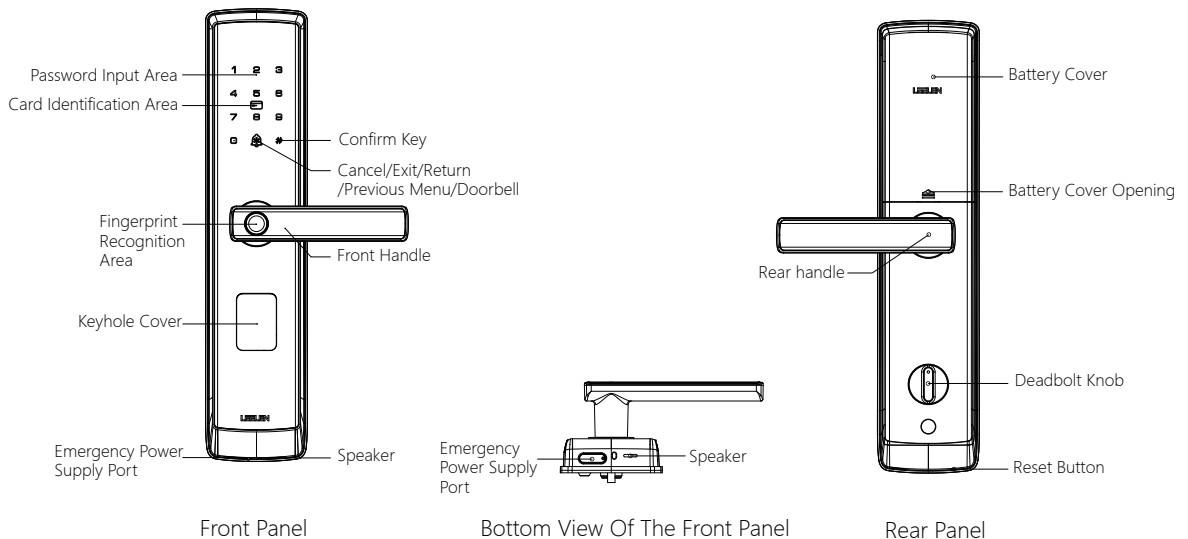

## 4 Set Up The Locking

### 4.1 Change Language Fastly

Long press the **5** key for 10S, the device enters the state of rapid language switching, at this time the voice will prompt "Language switching Settings: English press 1, Vietnamese press 2, Thai please 3, Indonesian press 4, Arabic press 5, hard to hear press #, return press \*". The user presses the corresponding numbers 1-5, and it prompts :the operation is successful.

### 4.2 Enter The Management Mode



1.Touch the keyboard area with the back of your hand, the keyboard light will light up, and wake up the keyboard.

2.Press and hold the # key for 2 seconds, enter the management password after hearing the voice prompt, and press # to confirm.(default password: 951058)

3.After hearing the menu prompt it means that it has entered the management mode.

Note: If the management password is the default password, it is recommended to modify the management password before performing other operations.

### 4.3 Add Unlocking Methods

In Management Mode:

When adding a user, the door lock will automatically number the user key, and the user only needs to enter fingerprints, passwords or cards according to the prompts.

Press the **1** key to add fingerprints, and follow the voice prompts to change different angles to enter fingerprints until it prompts: the operation is successful.

Press the **1** key to enter to add a password. After entering the 6-digit password, enter the password again according to it prompts: the operation is successful.

Press the **1** key to enter the card adding put the card in the card recognition area, until it prompts: the operation is successful.

### 4.4 Delete Unlocking Methods

In Management Mode:

Press the **2** key to delete the unlocking method, enter the user number according to the voice prompt and press # to confirm, until it prompts: the operation is successful.

## 4.5 Management Settings

### 4.5.1 Change the management Password

In Management Mode:

Press the **3** key to enter the management settings, and then press the **1** key to modify the management password. After entering a new 6-digit management password, follow the voice prompts and enter the management password again until it prompts: the operation is successful.

### 4.5.2 Add the management Fingerprint

In Management Mode:

Press the **3** key to enter the management settings, and then press the **2** key to add the management fingerprints, according to the voice prompts, change the fingerprints from different angles until it prompts: the operation is successful.

### 4.5.3 Delete the management Fingerprint

In Management Mode:

Press the **3** key to enter the management settings, and then press the **3** key to delete the management fingerprint. According to it prompts, press the # key to confirm until it prompts: the operation is successful.

## 4.6 System Settings

### 4.6.1 Volume Setting

In Management Mode:

Press the **4** key to enter the system settings, and then press the **1** key to set the volume. According to the voice prompt, press **1** to set the high volume, press **2** to set the medium volume, press **3** to set the low volume, and press **4** to set the mute. Until it prompts: the operation is successful.

Note: No matter which volume mode is set, the menu indicator sound, alarm sound, and factory reset prompt sound will always maintain a medium volume.

### 4.6.2 Illegal Input Times Settings

In Management Mode:

Press the **4** key to enter the system settings, and then press the **2** key to enter the number of illegal unlocking settings. According to the prompt, enter the unlocking times of 5-9, press # to confirm, until it prompts: the operation is successful.

Note: After the setting is completed, if the user fails to unlock for more than the above times, an alarm will be triggered.

### 4.6.3 Card Encryption Settings

In Management Mode:

Press the **4** key to enter the system settings, then press the **3** key to enter the card encryption setting, press the **1** key to enable it, press the **2** key to close it, until it prompts: the operation is successful. Encryption is enabled by default.

After opening, the use and entry of the card can be more secure and cannot be copied. If disabled, the security level of the card is reduced, but the applicability is enhanced, such as the door lock can be opened by copying the card through the mobile phone.

### 4.6.4 Language Changing Settings

In Management Mode:

Press the **4** key to enter the system settings, then press the **4** key to enter the language changing setting, and press the 1~5 key to select it, it prompts: the operation is successful.

### 4.6.5 Demo Mode Settings


In Management Mode:

Press the **4** key to enter the system settings, then press the **5** key to enter the demo mode setting, and press the **1** key to enable it, press the **2** key to disable it, until it prompts: the operation is successful. Demo mode is disabled by default.

## 5 Use The Lock

### 5.1 Outdoor Locking/Unlocking


#### Password Unlocking

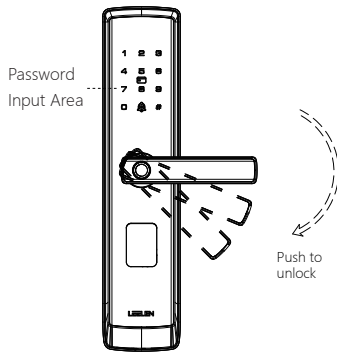

Outdoor | Front Panel

Touch or swipe the keypad to wake it up, enter the password and press # to confirm. After the verification is successful, please push the handle to unlock within 5 seconds after hearing the door opening prompt


#### Proximity Card Unlocking

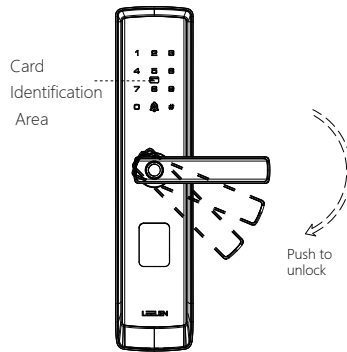

Outdoor | Front Panel

Tap an added card key on the identification area. After the verification is successful, please push the handle to unlock within 5 seconds after hearing the door opening prompt


#### Fingerprint Unlocking

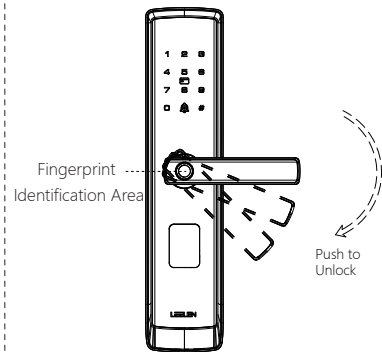

Outdoor | Front Panel

Put an added finger on the fingerprint recognition area. After the verification is successful, please push the handle to unlock within 5 seconds after hearing the door opening prompt


▲ If the wrong unlocking credentials (password/card/fingerprint) are entered continuously within 5 minutes, the smart lock will be locked for 90 seconds. After successful unlocking, if the door is not opened within 5 seconds, the smart lock will re-lock automatically.

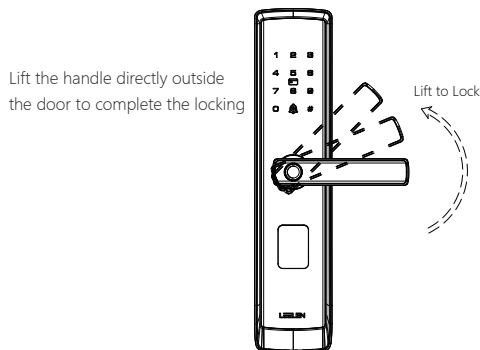

Outdoor | Front Panel

Press and hold the upper end of the key cover, rotate the cocked part, insert the key into the keyhole and turn to unlock until the bolt is fully retracted, and the door can be opened with a light push.

#### mechanical key unlocking



Outdoor | Front Panel

### 5.2 Indoor locking/Unlocking

#### 5.2.1 Locking


Lift the handle to complete the lock

#### 5.2.2 Deadbolt

After the anti-lock knob is turned to the "one" position, push down the handle to unlock

#### 5.2.3 Unlocking

Push down the handle to unlock

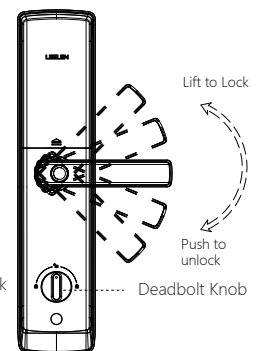

#### 5.2.4 Unlocking The Lock


Indoor | Front Panel

After the deadbolt knob is turned to the "I" position, the deadbolt can be unlocked



## 6 Other Functions


### 6.1 Restore Factory Settings

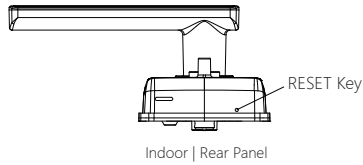

As shown in the figure, after long pressing the RESET button located under the inner lock of the door for 5 seconds, according to the voice prompt, short press the RESET button within 10s until it prompts "operation is successful", then the factory settings are restored successfully.


### 6.2 Battery Replacement

When the system voice prompts "The battery is low, please replace the battery", it is necessary to replace the corresponding part of the battery in time.



### 6.3 Emergency Power Supply Method

When the battery voltage is insufficient and cannot be opened from the outside, you can open the rubber plug of the power supply port at the bottom of the front panel, connect the power bank to the emergency power supply port (Type-C), and then use your fingerprint, password or card to unlock.

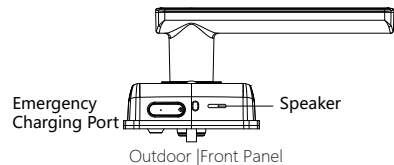

### 6.4 System Restart

If you need to restart the system, you can use a 5V power bank as an emergency power supply and power on the door lock through the Type-C interface to restart.

## 7 Basic Parameters

Front panel (L\*W\*H): 364.5\*82\*73.1mm  
 Rear panel (L\*W\*H): 364.5\*82\*72.3mm  
 Shell material: aluminum alloy + tempered glass  
 Lock body type: 6068 standard lock body/Overlord lock body  
 Input power: 4 AA dry batteries  
 Emergency power supply interface: Type-C 5V power supply port  
 Average power consumption of door lock: ≤35mA  
 Standby power consumption: ≤60uA  
 Working temperature: -25°C~+70°C  
 Working humidity: 0~93%±3%RH, non-condensing  
 Protection class: IP52  
 User capacity: 100 fingerprints(99+1 management)/50 password groups (49+1 management)/100 cards  
 Fingerprint recognition speed: 0.5 seconds/piece  
 Fingerprint false recognition rate (FAR): ≤0.001%  
 Fingerprint rejection rate (FAR): ≤5%  
 Number of fingerprint sensor presses: 1 million  
 Suitable for door thickness: standard 50mm~130mm  
 Door opening direction: left inner/outer door, right inner/outer door

## 8 Restricted Substances

Part Name	Toxic and hazardous substances or elements					
	Pb	Hg	Cd	Cr6+	PBB	PBDE
Metal Parts	O	O	O	O	O	O
Plastic Parts	O	O	O	O	O	O
Board Assembly*	X	O	O	O	O	O
Power Cord/Connection Cord	X	O	O	O	O	O

This form is prepared according to the provisions of SJ/T 11364:  
 O: Indicates that the content of the hazardous substance in all homogeneous materials of the part is below the limit requirement in GB/T 26572  
 X: Indicates that the content of the hazardous substance in at least one homogeneous material of the part exceeds the limit requirement specified in GB/T 26572  
 \*: Circuit board assembly includes printed circuit board and its components, such as resistors, capacitors, integrated circuits, etc.

## 9 Warranty Regulations

Sincerely thank you for purchasing Leelen' s product, please keep it in a safe place and no replacement will be issued for loss. Under normal use, where the product itself quality failure, the company will provide you with a two-year free warranty service. Users are requested to do the following cooperation:

- 1.Call the repair shop in the event that the user believes a repair is required;
- 2.The user shall present this certificate when carrying out repairs;
- 3.Beyond the warranty period or man-made damage, such as improper installation, disassembly, external damage and damage caused by water, fire or other natural disasters, we will charge a certain amount of material cost or maintenance labor costs;

We reserve the right of final interpretation, if there is any change, we will publicize it through the official website and other channels and consider that the customer is aware of it and has no objection.

Date	Malfunction Symptoms	Repair Record	Repair Technician

Warranty date: \_\_\_\_year \_\_\_\_month \_\_\_\_day to \_\_\_\_year \_\_\_\_month \_\_\_\_day

Warranty hotline: \_\_\_\_\_

Note: Please fill in the above content carefully, any changes will be deemed invalid!



### Certificate of Conformity

Inspector: \_\_\_\_\_

Production Date: \_\_\_\_\_