


图层 (Coverage)
树脂成份 (Resin composition)
强化玻纤 (Reinforce glass fiber)
单位重量 (Unit weight)
标准厚度 (Standard thickness)
透光率 (Light transmittance)
耐温限度 (Temperature tolerance limit)
抗紫外线率 (Anti-ultraviolet rate)
保证年限 (Warranty period)
热膨胀系数 (Thermal expansion)






通用型采光板 (Universal ty

普通聚酯薄膜 (General polyester film)
聚酯间苯型树脂 (Polyester polystyrene resin)
泰山玻纤T984, 含量28%-30% (Taishan fiberglass T984, con
1400g/m²
1. 0mm 1. 2mm 1. 5mm 2. 0mm
85% (透明) 72% (淡蓝色) 62% (淡白色) 85% (transl
(-40℃) 至 (+120℃) (-40℃) To (+120℃)
99%以上 (Above99%)
15年 (15 years)
$2.6 \times 10^{-5} \text{CM/CM/}^{\circ}\text{C}$

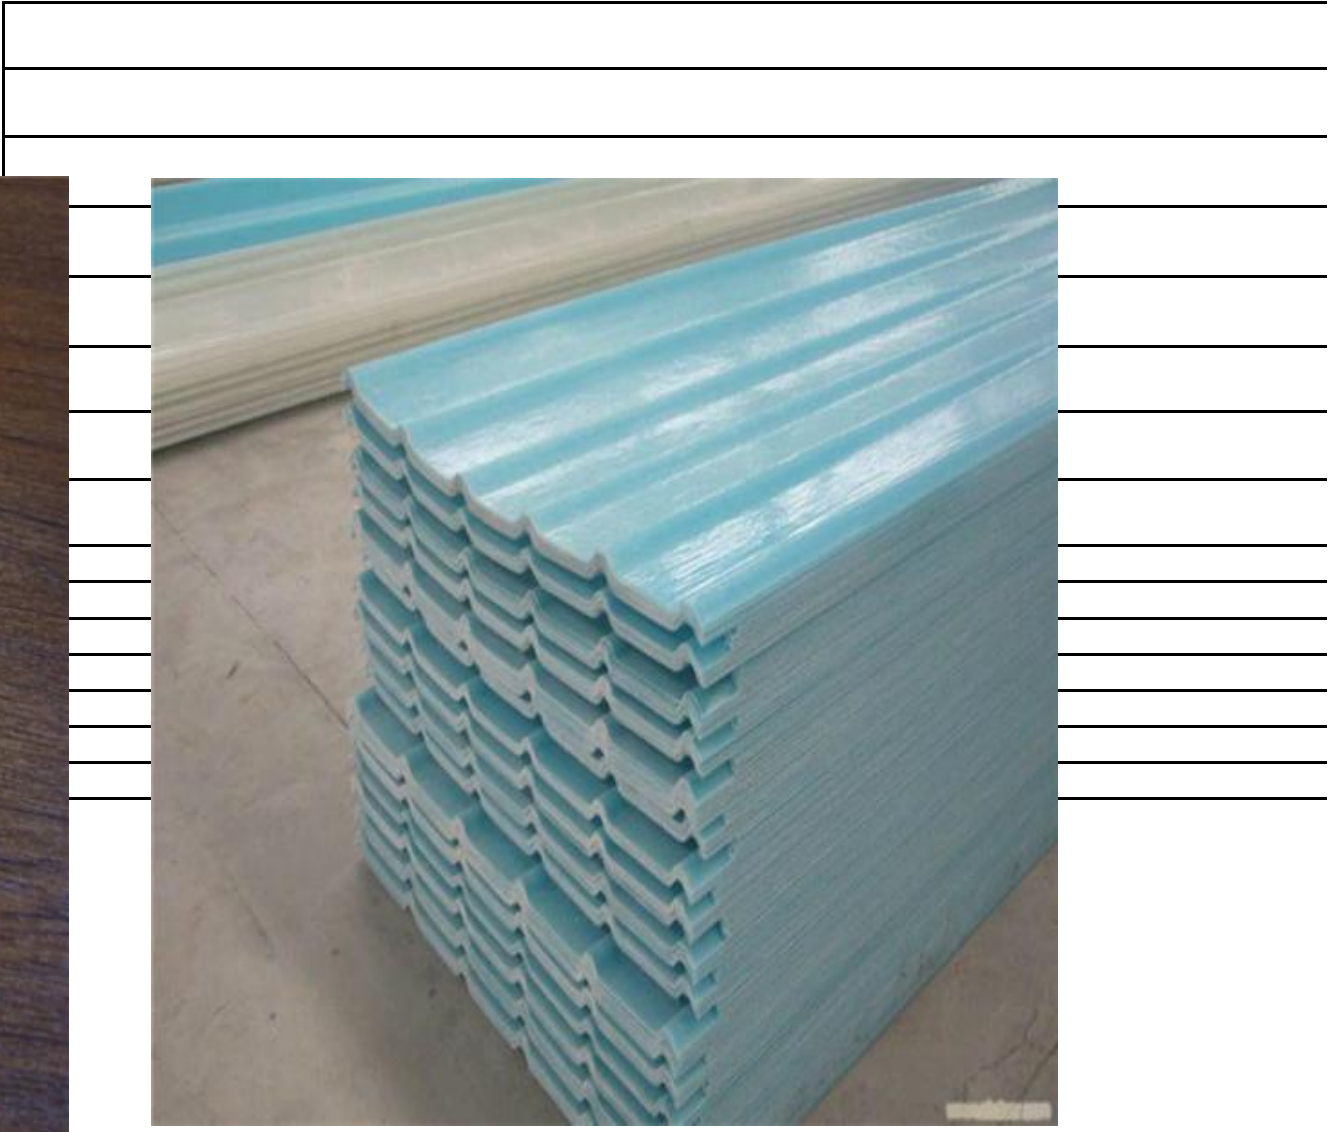

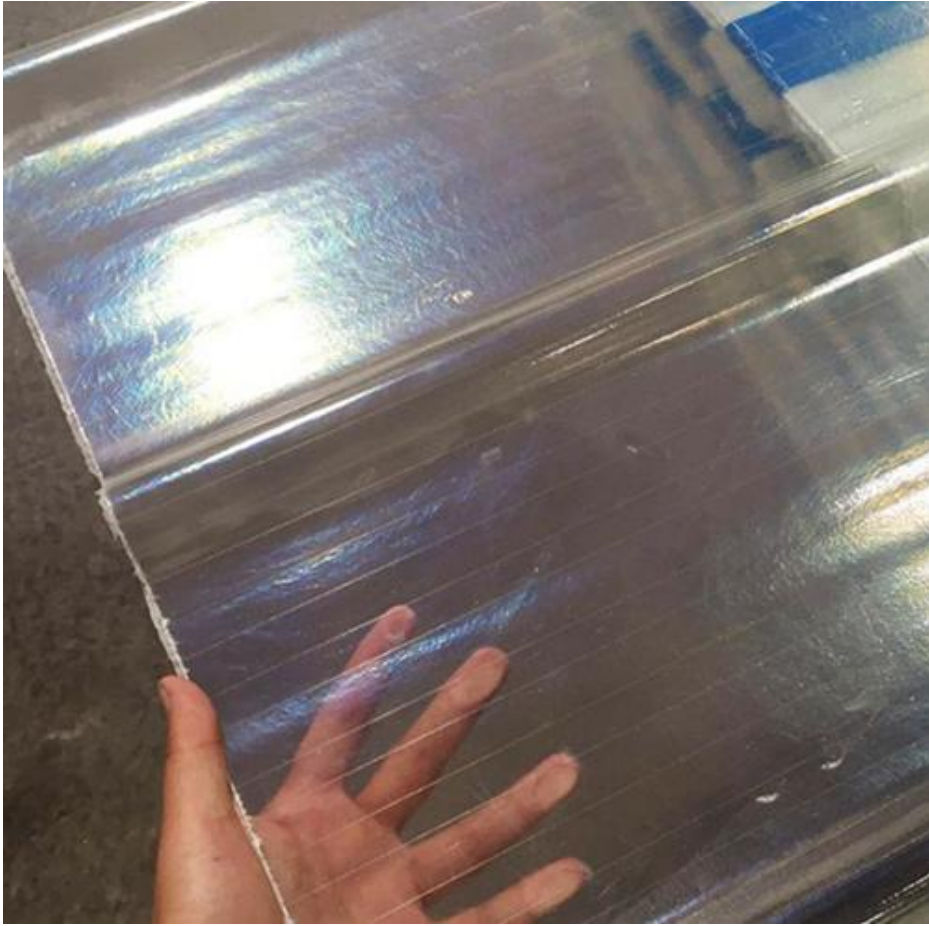

图层 (Coverage)
树脂成份 (Resin composition)
强化玻纤 (Reinforce glass fiber)
单位重量 (Unit weight)
标准厚度 (Standard thickness)
透光率 (Light transmittance)
耐温限度 (Temperature tolerance limits)
抗紫外线率 (Anti-ultraviolet rate)
保证年限 (Warranty period)
热膨胀系数 (Thermal expansion)







e)				

