

Tyrekiller



TDZ-Z766


uni-directional
*Lock by expansion bolts



TDZ-Z737


uni-directional

*Pre-embedded



TDZ-Z736


bi-directional *Lock by expansion bolts



TDZ-Z738-3M

bi-directional

*Pre-embedded

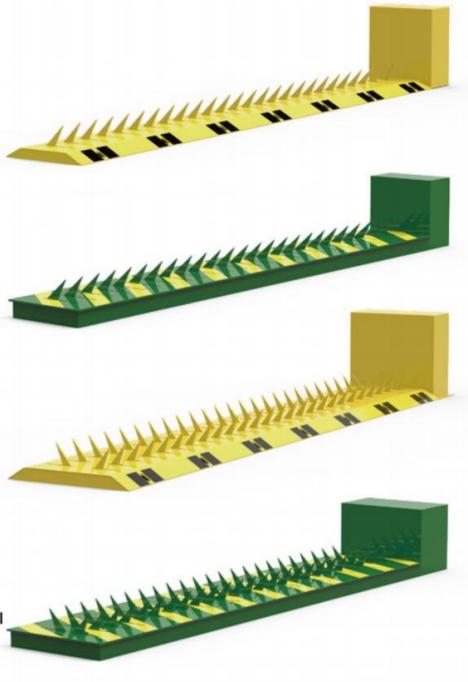



Technical data

Model	TDZ-Z766	TDZ-Z736	TDZ-Z737	TDZ-Z738-3N	
Height of spikes (Rising)	120mm (Uni-directional)		80mm(Bi-directional)		
Thickness of spikes	10mm				
Thickness of panel	12mm				
Axis	Dia. 25mm, 45# steel - solid				
Actuator	Single		Double		
Rising time	1-2s	1-2s			
Dropping time	1-2s				
Manually rising / dropping	Yes 🗸				
Power supply	220VAC				
Power consumption	200W		400W		
Dimension - Length	1m-6m (On request)				
- Width	550mm		800mm		
- Height (Dropping)	80mm	83mm	80mm	83mm	
Bracket & Spikes	2 layers spray paint				
Color (Customizable)		_			
Color of reflective tape (On request)					
Control center	Spray paint (Outdoor use)				
Remote control distance	100m				
Wire switch	Optional 🗸				
Traffic light linkage control support	Yes 🗸				

