

# TQJ-0860XTYGA

## Smoke Sensor Ceiling Mount Antenna

### Technical Sheet



Note: the picture is for reference only, please kindly consult with the real product.

#### Applications

- 806 to 6000MHz band
- Indoor coverage


#### Features

- Super broadband
- Low VSWR, Stable performance
- Small size, Low profile, Good appearance
- Ceiling mounting, Easy to mount

#### Specifications

Model	TQJ-0860XTYGA				
Freq.Range -MHz	806 ~ 960	1425 ~ 1700	1700 ~ 3100	3100 ~ 3450	5150 ~ 6000
VSWR	≤1.8		≤2.5	≤1.8	
Gain-dBi	2.5	3		3.5	
Impedance-Ω	50				
Polarization	Vertical				
Max.Power-W	100				
Connector Place	Bottom				
Connector	N female or customized				
Dimensions -mm	φ258×95				
Weight-kg	0.8				

#### Installation Sketch

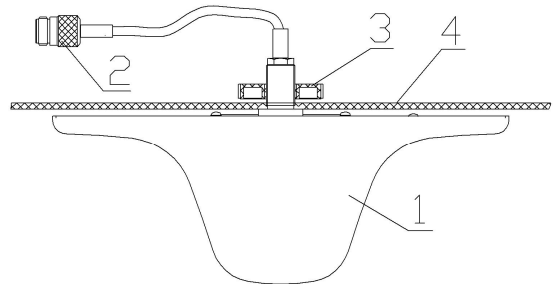

1.Antenna 2.Connector 3.Nut 4.Ceiling

#### Installation Instructions:

1. When installing, drill a hole matching the connector on the ceiling, then pull the connector through the hole, and fasten the mounting nut on the other side of the ceiling to fix the antenna, as shown in the above figure.
2. Join the connector and insure its good contact.
3. Any surrounding metal objects may affect the performance of the antenna.



Kenbotong Technology Co., Ltd.

Addr :NO.2 Chanxiu Road ,Foshan city,Guangdong China Code:528061  
Tel: 86(757)8202-5597, 8221-9788 Fax : 86(757)8221-2072,8802-2808  
Email: kbt@kenbotong.com web: <http://www.kenbotong.com>