

**KBT****617~960/1350~1550/1695~2700/3300~4200/4800~7125MHz**
4/4/5/6/5dBi MIMO Omnidirectional ceiling antenna**TQJ-D0672XTLA-M****Application**

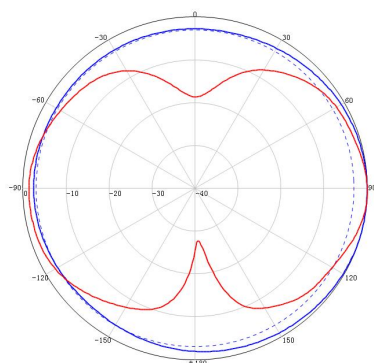
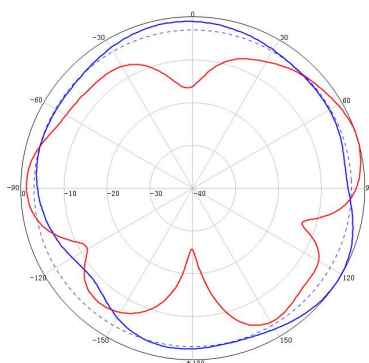
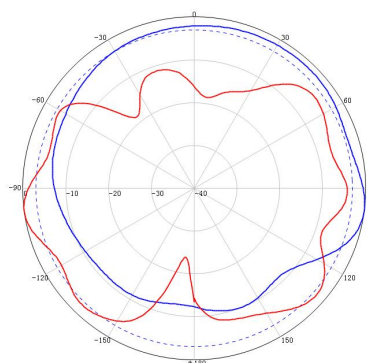
Used in 2G/3G/4G/5G/WLAN system

Electrical specifications

Frequency range (MHz)	617~960	1350~1550	1695~2700	3300~4200	4800~7125
Polarization	2*Linear,Horizontal				
Typical Gain (dBi)	4	4	5	6	5
Horizontal beam width (°)	360, omnidirectional				
Typical Vertical beam width (°)	70	60	50	30	30
Isolation (dB)	≥18	≥17	≥20	≥30	≥30
Impedance (Ω)	50				
VSWR	≤1.9	≤2.0	≤1.9	≤1.9	≤2.0
Intermodulation IM3 (2×43dBm carrier)	≤-153 dBc	/	≤-153 dBc	≤-153 dBc	/
Maximum power (W)	50				

Mechanical specifications

Connector	2*4.3-10 Female or 2*N Female
Exposed cable size (cm)	30
Connector position	Bottom
Antenna size (mm)	Φ250*8
Packing size (mm)	265*260*88
Weight (kg)	0.4
Radome material	ABS
Radome color	White (RAL 9003)
Operating humidity (%)	5~95
Operating temperature (°C)	-40~60
Application	Indoor
Mounting	Fixed with nut

617~960MHz Typical pattern:**1350~2700MHz Typical pattern:****3300~7125MHz Typical pattern:**

Add: No.30 Dongyang 3rd Road, Danzao Town, Nanhai District, Foshan City, Guangdong, China 528216

Tel: +86-757-88022860

Email: kbt@kenbotong.com

Web: <http://www.kenbotong.com>


**KBT**

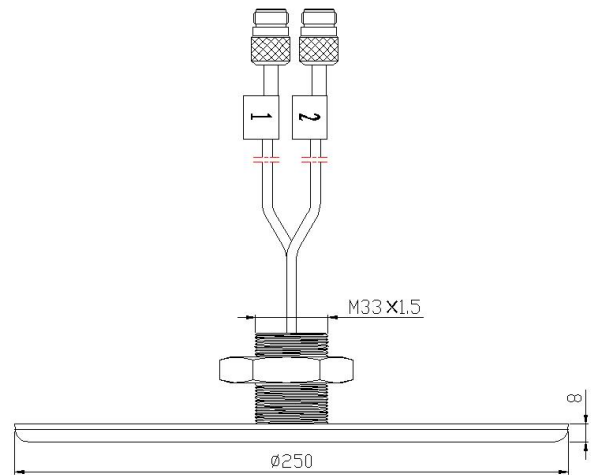617~960/1350~1550/1695~2700/3300~4200/4800~7125MHz
4/4/5/6/5dBi MIMO Omnidirectional ceiling antenna


Product pictures



Product size



Installation Sketch

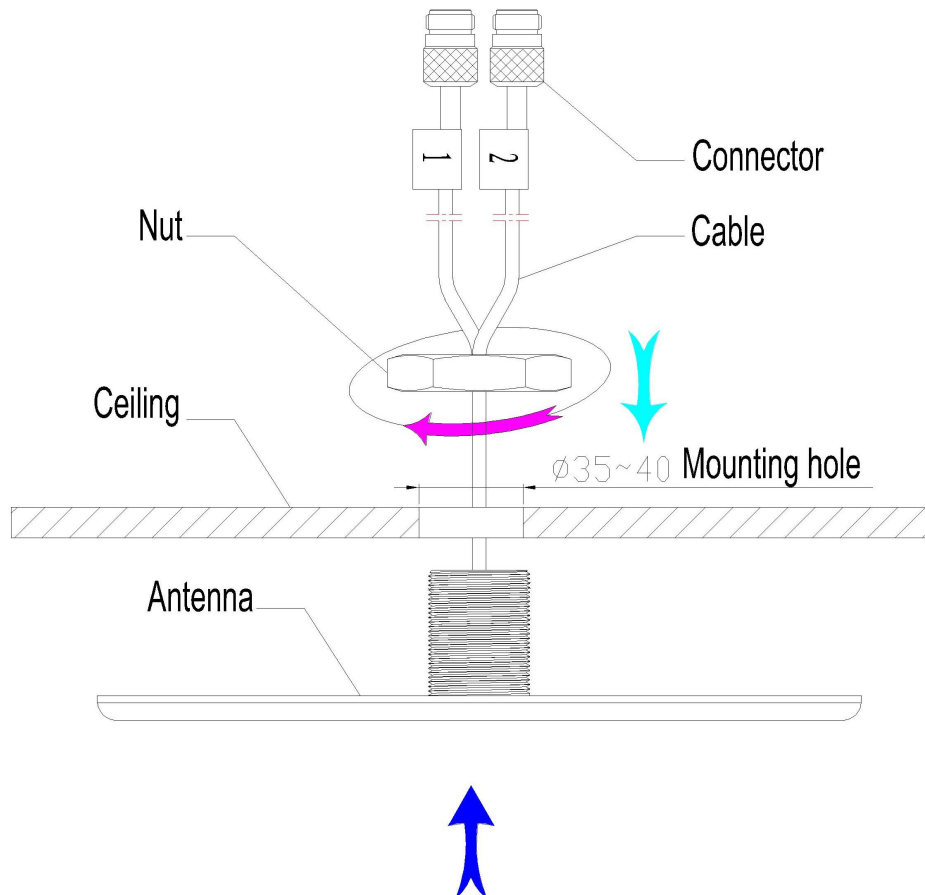

1. Drill a $\Phi 35 - \Phi 40$ hole on the ceiling.
2. Install the antenna as the following picture shows then tighten the bolts.
3. Connect the RF jumper to antenna connector.

NOTE: The antenna please not to install on the big area metals, in order to prevent influence antenna result.

Add: No.30 Dongyang 3rd Road, Danzao Town, Nanhai District, Foshan City, Guangdong, China 528216

Tel: +86-757-88022860

Email: kbt@kenbotong.com

Web: <http://www.kenbotong.com>