

CH-A315全自动对接焊机

用途及特点：

- ◇适用于连接HDPE、PVDF、MPP管；
- ◇由机架、液压控制箱、铣刀与加热板支架组成；
- ◇系统带有实时焊接数据记录及打印功能，并且可以通过USB接口导出数据；
- ◇系统内设DVS2207-1焊接标准，并且支持自定义设置；
- ◇标准单片夹具，提高管道对中准确度。



※Suitable for butt welding of plastic pipes made of HDPE, PVDF and MPP inf worksite or workshop.

※Consists of basic frame,hydraulic unit,planing tool,heating plate,support for planing tool & heating plate, and optional parts.

※Real-time data printing,record function and USB port avaiable.

※<DVS2207-1>serving as system-default welding standard,moreover,customized welding standard available.

※Standard is equipped single ciamps for enhancing alignment accuracy

※Focus on humanizde design and detailed operation reminder enables operator to easily familiar with welding process.

型 号		Model	CH-A315全自动对接焊机
焊接规格(mm)		Pipe size	160,180,200,225,250,280,315
压力调节范围(MPa)		Max working pressure hydraulic station	0-6. 3
耗电总功率(KW)		Total power	5. 85
工作电压(V)		Working votage	220
加热板最高温度(℃)		Heating plate Max temp	270
总重量(KG)		Overall weight of machine	250
包装尺寸	机架 ( cm )	The machine frame Packing size	133. 5*79*67. 5
	铣刀、加热板 ( cm )	Milling cutter/the heating plate Packing size	67*64*45. 5
	控制箱 ( cm )	Control box Packing size	74. 5*46*58

CH-A250全自动对接焊机

用途及特点：

- ◇适用于连接HDPE、PVDF、MPP管；
- ◇由机架、液压控制箱、铣刀与加热板支架组成；
- ◇系统带有实时焊接数据记录及打印功能，并且可以通过USB接口导出数据；
- ◇系统内设DVS2207-1焊接标准，并且支持自定义设置；
- ◇标准单片夹具，提高管道对中准确度。



※Suitable for butt welding of plastic pipes made of HDPE, PVDF and MPP inf worksite or workshop.

※Consists of basic frame,hydraulic unit,planing tool,heating plate,support for planing tool & heating plate, and optional parts.

※Real-time data printing,record function and USB port avaiable.

※<DVS2207-1>serving as system-default welding standard,moreover,customized welding standard available.

※Standard is equipped single ciamps for enhancing alignment accuracy

※Focus on humanizde design and detailed operation reminder enables operator to easily familiar with welding process.

型 号		Model	CH-A250全自动对接焊机
焊接规格(mm)		Pipe size	90,110,125,140,160,180,200,225,250
压力调节范围(MPa)		Max working pressure hydraulic station	0-6. 3
耗电总功率(KW)		Total power	4. 05
工作电压(V)		Working votage	220
加热板最高温度(℃)		Heating plate Max temp	270
总重量(KG)		Overall weight of machine	200
包装尺寸	机架 ( cm )	The machine frame Packing size	121. 5*69*56. 5
	铣刀、加热板 ( cm )	Milling cutter/the heating plate Packing size	61. 5*59*44. 5
	控制箱 ( cm )	Control box Packing size	74. 5*46*58

## CH-H1000液压对接焊机

### 用途及特点:

- ◇适用于在工地连接HDPE、PVDF、MPP管材与管材、管材与管件，也可在车间使用；
- ◇由机架、液压站、铣刀、加热板、铣刀与加热板支架以及可选择附件组成；
- ◇加热板独立温控系统，聚四氟乙烯表面涂层；
- ◇电动铣刀,安全限位开关，防止铣刀意外启动；
- ◇机架采用倾斜设计；
- ◇低启动压力，高可靠性密封结构；
- ◇焊接位置可变换，方便焊接各种管件；
- ◇独立的双通道计时器，可记录吸热和冷却两个时间段，计时结束报警，方便使用者；
- ◇大表盘、高精度防震压力，表读数更清晰。



- ※ Suitable for butt welding of plastic pipes made of HDPE, PVDF and MPP inf worksite or workshop.
- ※ Consists of basic frame,hydraulic unit,planing tool,heating plate,support for planing tool & heating plate, and optional parts.
- ※ Removable PTFE coated heating plate with high accurate temperature control system.
- ※ Eletric planning tool with safety limit switch enables to start it only when it is locked in operation position.
- ※ Slant design for basic frame.
- ※ Low starting pressure and high reliable seal structure.
- ※ Changeable welding position brings more convenience while welding various fittings.
- ※ Separate two-channel timer records times in soaking and cooling phases.
- ※ High-accurate and shockproof pressure meter indicates clearer readings.

型 号		Model	CH-H1000液压四环对接焊机
焊接规格(mm)		Pipe size	710,800,900,1000
压力调节范围(MPa)		Max working pressure hydraulic station	0-6.3
耗电总功率(KW)		Total power	20
工作电压(V)		Working votage	380
加热板最高温度(℃)		Heating plate Max temp	270
总重量(KG)		Overall weight of machine	2200
包装尺寸	机架 ( cm )	The machine frame Packing size	258*160*175
	铣刀、加热板 ( cm )	Milling cutter/the heating plate Packing size	133*95*188
	控制箱 ( cm )	Control box Packing size	79*58*52

## CH-H800液压对接焊机

### 用途及特点:

- ◇适用于在工地连接HDPE、PVDF、MPP管材与管材、管材与管件，也可在车间使用；
- ◇由机架、液压站、铣刀、加热板、铣刀与加热板支架以及可选择附件组成；
- ◇加热板独立温控系统，聚四氟乙烯表面涂层；
- ◇电动铣刀,安全限位开关，防止铣刀意外启动；
- ◇机架采用倾斜设计；
- ◇低启动压力，高可靠性密封结构；
- ◇焊接位置可变换，方便焊接各种管件；
- ◇独立的双通道计时器，可记录吸热和冷却两个时间段，计时结束报警，方便使用者；
- ◇大表盘、高精度防震压力，表读数更清晰。



- ※ Suitable for butt welding of plastic pipes made of HDPE, PVDF and MPP inf worksite or workshop.
- ※ Consists of basic frame,hydraulic unit,planing tool,heating plate,support for planing tool & heating plate, and optional parts.
- ※ Removable PTFE coated heating plate with high accurate temperature control system.
- ※ Eletric planning tool with safety limit switch enables to start it only when it is locked in operation position.
- ※ Slant design for basic frame.
- ※ Low starting pressure and high reliable seal structure.
- ※ Changeable welding position brings more convenience while welding various fittings.
- ※ Separate two-channel timer records times in soaking and cooling phases.
- ※ High-accurate and shockproof pressure meter indicates clearer readings.

型 号		Model	CH-H800液压四环对接焊机
焊接规格(mm)		Pipe size	630,710,800
压力调节范围(MPa)		Max working pressure hydraulic station	0-6.3
耗电总功率(KW)		Total power	16.2
工作电压(V)		Working votage	380
加热板最高温度(℃)		Heating plate Max temp	270
总重量(KG)		Overall weight of machine	1100
包装尺寸	机架 ( cm )	The machine frame Packing size	190*136*140
	铣刀、加热板 ( cm )	Milling cutter/the heating plate Packing size	110*72*162
	控制箱 ( cm )	Control box Packing size	79*56*51

### CH-H630液压对接焊机

用途及特点：

- ◇适用于在工地连接HDPE、PVDF、MPP管材与管材、管材与管件，也可在车间使用；
- ◇由机架、液压站、铣刀、加热板、铣刀与加热板支架以及可选择附件组成；
- ◇加热板独立温控系统，聚四氟乙烯表面涂层；
- ◇电动铣刀,安全限位开关，防止铣刀意外启动；
- ◇机架采用倾斜设计；
- ◇低启动压力，高可靠性密封结构；
- ◇焊接位置可变换，方便焊接各种管件；
- ◇独立的双通道计时器，可记录吸热和冷却两个时间段，计时结束报警，方便使用者；
- ◇大表盘、高精度防震压力，表读数更清晰。



- ※Suitable for butt welding of plastic pipes made of HDPE, PVDF and MPP inf worksite or workshop.
- ※Consists of basic frame,hydraulic unit,planing tool,heating plate,support for planing tool & heating plate, and optional parts.
- ※Removable PTFE coated heating plate with high accurate temperature control system.
- ※Eletric planning tool with safety limit switch enables to start it only when it is locked in operation position.
- ※Slant design for basic frame.
- ※Low starting pressure and high reliable seal structure.
- ※Changeable welding position brings more convenience while welding various fittings.
- ※Separate two-channel timer records times in soaking and cooling phases.
- ※High-accurate and shockproof pressure meter indicates clearer readings.

型 号		Model	CH-H630液压四环对接焊机
焊接规格(mm)		Pipe size	400,450,500,560,630
压力调节范围(MPa)		Max working pressure hydraulic station	0-6.3
耗电总功率(KW)		Total power	16.2
工作电压(V)		Working votage	380
加热板最高温度(℃)		Heating plate Max temp	270
总重量(KG)		Overall weight of machine	571
包装尺寸	机架 ( cm )	The machine frame Packing size	141*105*112
	铣刀、加热板 ( cm )	Milling cutter/the heating plate Packing size	104*85*133
	控制箱 ( cm )	Control box Packing size	70*53*50

### CH-H500液压对接焊机

用途及特点：

- ◇适用于在工地连接HDPE、PVDF、MPP管材与管材、管材与管件，也可在车间使用；
- ◇由机架、液压站、铣刀、加热板、铣刀与加热板支架以及可选择附件组成；
- ◇加热板独立温控系统，聚四氟乙烯表面涂层；
- ◇电动铣刀,安全限位开关，防止铣刀意外启动；
- ◇机架采用倾斜设计；
- ◇低启动压力，高可靠性密封结构；
- ◇焊接位置可变换，方便焊接各种管件；
- ◇独立的双通道计时器，可记录吸热和冷却两个时间段，计时结束报警，方便使用者；
- ◇大表盘、高精度防震压力，表读数更清晰。



- ※Suitable for butt welding of plastic pipes made of HDPE, PVDF and MPP inf worksite or workshop.
- ※Consists of basic frame,hydraulic unit,planing tool,heating plate,support for planing tool & heating plate, and optional parts.
- ※Removable PTFE coated heating plate with high accurate temperature control system.
- ※Eletric planning tool with safety limit switch enables to start it only when it is locked in operation position.
- ※Slant design for basic frame.
- ※Low starting pressure and high reliable seal structure.
- ※Changeable welding position brings more convenience while welding various fittings.
- ※Separate two-channel timer records times in soaking and cooling phases.
- ※High-accurate and shockproof pressure meter indicates clearer readings.

型 号		Model	CH-H500液压四环对接焊机
焊接规格(mm)		Pipe size	315,355,400,450,500
压力调节范围(MPa)		Max working pressure hydraulic station	0-6.3
耗电总功率(KW)		Total power	10
工作电压(V)		Working votage	380
加热板最高温度(℃)		Heating plate Max temp	270
总重量(KG)		Overall weight of machine	520
包装尺寸	机架 ( cm )	The machine frame Packing size	121*89*97
	铣刀、加热板 ( cm )	Milling cutter/the heating plate Packing size	81*68*116
	控制箱 ( cm )	Control box Packing size	70*53*50

## CH-H450液压对接焊机

### 用途及特点：

- ◇适用于在工地连接HDPE、PVDF、MPP管材与管材、管材与管件，也可在车间使用；
- ◇由机架、液压站、铣刀、加热板、铣刀与加热板支架以及可选择附件组成；
- ◇加热板独立温控系统，聚四氟乙烯表面涂层；
- ◇电动铣刀,安全限位开关，防止铣刀意外启动；
- ◇机架采用倾斜设计；
- ◇低启动压力，高可靠性密封结构；
- ◇焊接位置可变换，方便焊接各种管件；
- ◇独立的双通道计时器，可记录吸热和冷却两个时间段，计时结束报警，方便使用者；
- ◇大表盘、高精度防震压力，表读数更清晰。



- ※Suitable for butt welding of plastic pipes made of HDPE, PVDF and MPP inf worksite or workshop.
- ※Consists of basic frame,hydraulic unit,planing tool,heating plate,support for planing tool & heating plate, and optional parts.
- ※Removable PTFE coated heating plate with high accurate temperature control system.
- ※Eletric planning tool with safety limit switch enables to start it only when it is locked in operation position.
- ※Slant design for basic frame.
- ※Low starting pressure and high reliable seal structure.
- ※Changeable welding position brings more convenience while welding various fittings.
- ※Separate two-channel timer records times in soaking and cooling phases.
- ※High-accurate and shockproof pressure meter indicates clearer readings.

型 号		Model	CH-H450液压四环对接焊机
焊接规格(mm)		Pipe size	280,315,355,400,450
压力调节范围(MPa)		Max working pressure hydraulic station	0-6.3
耗电总功率(KW)		Total power	9.1
工作电压(V)		Working votage	380
加热板最高温度(℃)		Heating plate Max temp	270
总重量(KG)		Overall weight of machine	400
包装尺寸	机架 ( cm )	The machine frame Packing size	120*86*95
	铣刀、加热板 ( cm )	Milling cutter/the heating plate Packing size	78*68*113
	控制箱 ( cm )	Control box Packing size	70*53*50

## CH-H400液压对接焊机

### 用途及特点：

- ◇适用于在工地连接HDPE、PVDF、MPP管材与管材、管材与管件，也可在车间使用；
- ◇由机架、液压站、铣刀、加热板、铣刀与加热板支架以及可选择附件组成；
- ◇加热板独立温控系统，聚四氟乙烯表面涂层；
- ◇电动铣刀,安全限位开关，防止铣刀意外启动；
- ◇机架采用倾斜设计；
- ◇低启动压力，高可靠性密封结构；
- ◇焊接位置可变换，方便焊接各种管件；
- ◇独立的双通道计时器，可记录吸热和冷却两个时间段，计时结束报警，方便使用者；
- ◇大表盘、高精度防震压力，表读数更清晰。



- ※Suitable for butt welding of plastic pipes made of HDPE, PVDF and MPP inf worksite or workshop.
- ※Consists of basic frame,hydraulic unit,planing tool,heating plate,support for planing tool & heating plate, and optional parts.
- ※Removable PTFE coated heating plate with high accurate temperature control system.
- ※Eletric planning tool with safety limit switch enables to start it only when it is locked in operation position.
- ※Slant design for basic frame.
- ※Low starting pressure and high reliable seal structure.
- ※Changeable welding position brings more convenience while welding various fittings.
- ※Separate two-channel timer records times in soaking and cooling phases.
- ※High-accurate and shockproof pressure meter indicates clearer readings.

型 号		Model	CH-H400液压四环对接焊机
焊接规格(mm)		Pipe size	250,280,315,355,400
压力调节范围(MPa)		Max working pressure hydraulic station	0-6. 3
耗电总功率(KW)		Total power	9. 1
工作电压(V)		Working votage	380
加热板最高温度(℃)		Heating plate Max temp	270
总重量(KG)		Overall weight of machine	383
包装尺寸	机架 ( cm )	The machine frame Packing size	121*79*87
	铣刀、加热板 ( cm )	Milling cutter/the heating plate Packing size	77*68*104
	控制箱 ( cm )	Control box Packing size	70*53*50

CH-H355液压对接焊机



用途及特点:

- ◇适用于在工地连接HDPE、PVDF、MPP管材与管材、管材与管件，也可在车间使用；
- ◇由机架、液压站、铣刀、加热板、铣刀与加热板支架以及可选择附件组成；
- ◇加热板独立温控系统，聚四氟乙烯表面涂层；
- ◇电动铣刀；
- ◇机架倾斜设计；结构简便，小巧，使用方便；
- ◇低启动压力，使焊接小口径管材更为可靠；
- ◇焊接位置可变换，方便焊接各种管件；
- ◇独立的双通道计时器，可记录吸热和冷却两个时间段，计时结束报警，方便使用者；
- ◇大表盘、高精度防震压力，表读数更清晰。

- ※ Suitable for butt welding of plastic pipes made of HDPE, PVDF and MPP inf worksite or workshop.
- ※ Consists of basic frame,hydraulic unit,planing tool, heating plate,support for planing tool & heating plate, and optional parts.
- ※ Removable PTFE coated heating plate with high accurate temperature control system.
- ※ Electrical planing tool.
- ※ Be made of lightweight and high strength material; sipple structure, small and delicate, user friendly.
- ※ Slant design for basic frame.
- ※ Low starting pressure ensures reliable welding quality of small pipes.
- ※ Changeable welding position enables to weld various fittings more easily.
- ※ Separate two-channel timer shows time in soaking and cooling phases.Give a alarm when timing over.
- ※ High-accurate and shockproof pressure meter indicates clearer readings.
- ※ Digital pressure meter is installed on machines.

型 号		Model	CH-H355液压四环对接焊机
焊接规格(mm)		Pipe size	160,180,200,225,250,280,315,355
压力调节范围(MPa)		Max working pressure hydraulic station	0-6.3
耗电总功率(KW)		Total power	6
工作电压(V)		Working votage	220
加热板最高温度(℃)		Heating plate Max temp	270
总重量(KG)		Overall weight of machine	250
包装尺寸	机架 ( cm )	The machine frame Packing size	103*69*66
	铣刀、加热板 ( cm )	Milling cutter/the heating plate Packing size	69*64*46
	控制箱 ( cm )	Control box Packing size	70*53*50

CH-H315液压对接焊机

CH-H250液压对接焊机

用途及特点:

- ◇适用于在工地连接HDPE、PVDF、MPP管材与管材、管材与管件，也可在车间使用；
- ◇由机架、液压站、铣刀、加热板、铣刀与加热板支架以及可选择附件组成；
- ◇加热板独立温控系统，聚四氟乙烯表面涂层；
- ◇电动铣刀；
- ◇机架倾斜设计；结构简便，小巧，使用方便；
- ◇低启动压力，使焊接小口径管材更为可靠；
- ◇焊接位置可变换，方便焊接各种管件；
- ◇大表盘、高精度防震压力，表读数更清晰。



- ※ Suitable for butt welding of plastic pipes made of HDPE, PVDF and MPP inf worksite or workshop.
- ※ Consists of basic frame,hydraulic unit,planing tool,heating plate,support for planing tool & heating plate,and optional parts.
- ※ Removable PTFE coated heating plate with high accurate temperature control system.
- ※ Electrical planing tool.
- ※ Be made of lightweight and high strength material; sipple structure, small and delicate, user friendly.
- ※ Slant design for basic frame.
- ※ Low starting pressure ensures reliable welding quality of small pipes.
- ※ Changeable welding position enables to weld various fittings more easily.
- ※ High-accurate and shockproof pressure meter indicates clearer readings.
- ※ Digital pressure meter is installed on machines.

型 号		Model	CH-H315液压四环对接焊机	CH-H250液压四环对接焊机
焊接规格(mm)		Pipe size	160,180,200,225,250,280,315	90,110,125,140,160,180,200,225,250
压力调节范围(MPa)		Max working pressure hydraulic station	0-6.3	0-6.3
耗电总功率(KW)		Total power	5.85	4.05
工作电压(V)		Working votage	220	220
加热板最高温度(℃)		Heating plate Max temp	270	270
总重量(KG)		Overall weight of machine	239	181
包装尺寸	机架 ( cm )	The machine frame Packing size	103*66*64	92*59*47
	铣刀、加热板 ( cm )	Milling cutter/the heating plate Packing size	66*55*68	68*53*52
	控制箱 ( cm )	Control box Packing size	70*53*50	70*53*50

CH-H200液压对接焊机

CH-H160液压对接焊机

**用途及特点:**

- ◇适用于在工地连接HDPE、PVDF、MPP管材与管材、管材与管件，也可在车间使用；
- ◇由机架、液压站、铣刀、加热板、铣刀与加热板支架以及可选择附件组成；
- ◇加热板独立温控系统，聚四氟乙烯表面涂层；
- ◇电动铣刀；
- ◇机架倾斜设计；结构简便，小巧，使用方便；
- ◇低启动压力，使焊接小口径管材更为可靠；
- ◇焊接位置可变换，方便焊接各种管件；
- ◇大表盘、高精度防震压力，表读数更清晰。

- ※ Suitable for butt welding of plastic pipes made of HDPE, PVDF and MPP inf worksite or workshop.
- ※ Consists of basic frame,hydraulic unit,planing tool, heating plate,support for planing tool & heating plate, and optional parts.
- ※ Removable PTFE coated heating plate with high accurate temperature control system.
- ※ Electrical planing tool.
- ※ Be made of lightweight and high strength material; sipple structure, small and delicate, user friendly.
- ※ Slant design for basic frame.
- ※ Low starting pressure ensures reliable welding quality of small pipes.
- ※ Changeable welding position enables to weld various fittings more easily.
- ※ High-accurate and shockproof pressure meter indicates clearer readings.
- ※ Digital pressure meter is installed on machines.

型 号		Model	CH-H200液压四环对接焊机	CH-H160液压四环对接焊机
焊接规格(mm)		Pipe size	63,75,90,110,125,140,160,180,200	63,75,90,110,125,140,160
压力调节范围(MPa)		Max working pressure hydraulic station	0-6.3	0-6.3
耗电总功率(KW)		Total power	3.65	3.35
工作电压(V)		Working votage	220	220
加热板最高温度(℃)		Heating plate Max temp	270	270
总重量(KG)		Overall weight of machine	122	117
包装尺寸	机架 ( cm )	Packing size	92*59*47	92*52*47
	控制箱 ( cm )	Controlbox Packing size	70*53*50	70*53*50

CH-Y200-2M手摇二环对接焊机

CH-Y160-2M手摇二环对接焊机

**用途及特点:**

- ◇适用于HDPE、PVDF、MPP管道的焊接，农用管道焊接；
- ◇由机架、铣刀、加热板、铣刀与加热板支架组成；
- ◇加热板聚四氟乙烯表面涂层；
- ◇电动铣刀；
- ◇机架主要部分为铝合金材料，结构简便，小巧，使用方便。

- ※ Suitable for welding of plastic pipes and/ or fittings made of HDPE, PVDF and MPP can be operated in any complex work condition.
- ※ Consists of basic frame,planing tool,heating plate and support for planing tool and heating plate.
- ※ Removable PTFE coated heating plate with separate temperature control system
- ※ Electrical planing tool.
- ※ Be made of aluminum alloy material,simple structure,small and delicate,user friendly.

型 号		Model	CH-Y200-2M手摇二环对接焊机	CH-Y160-2M手摇二环对接焊机
焊接规格(mm)		Pipe size(mm)	63,75,90,110,125,140,160,180,200	63,75,90,110,125,140,160
耗电总功率(KW)		Total power	3.65	3.35
工作电压(V)		Working votage	220	220
加热板最高温度(℃)		Heating plate Max temp	270	270
总重量(KG)		Overall weight of machine	62	46
包装尺寸(cm*cm*cm)		Packing size	74*59*53	68*54*53

CH-Y200-4M手摇四环对接焊机

CH-Y160-4M手摇四环对接焊机

**用途及特点:**

- ◇适用于HDPE、PVDF、MPP管道的焊接，农用管道焊接；
- ◇由机架、铣刀、加热板、铣刀与加热板支架组成；
- ◇加热板聚四氟乙烯表面涂层；
- ◇电动铣刀；
- ◇机架主要部分为铝合金材料，结构简便，小巧，使用方便。

※ Suitable for welding of plastic pipes and/ or fittings made of HDPE, PVDF and MPP can be operated in any complex work condition.  
※ Consists of basic frame, planing tool, heating plate and support for planing tool and heating plate.  
※ Removable PTFE coated heating plate with separate temperature control system  
※ Electrical planing tool.  
※ Be made of aluminum alloy material, simple structure, small and delicate, user friendly.

型 号	Model	CH-Y200-4M手摇四环对接焊机	CH-Y160-4M手摇四环对接焊机
焊接规格(mm)	Pipe size(mm)	63,75,90,110,125,140,160,180,200	63,75,90,110,125,140,160
耗电总功率(KW)	Total power	2.6	2.3
工作电压(V)	Working votage	220	220
加热板最高温度(℃)	Heating plate Max temp	270	270
总重量(KG)	Overall weight of machine	66	58
包装尺寸(cm*cm*cm)	Packing size	74*59*53	68*54*53

CH-Y250-4M手摇四环对接焊机

**用途及特点:**

- ◇适用于HDPE、PVDF、MPP管道的焊接，农用管道焊接；
- ◇由机架、铣刀、加热板、铣刀与加热板支架组成；
- ◇加热板聚四氟乙烯表面涂层；
- ◇电动铣刀；
- ◇机架主要部分为铝合金材料，结构简便，小巧，使用方便。

※ Suitable for welding of plastic pipes and/ or fittings made of HDPE, PVDF and MPP can be operated in any complex work condition.  
※ Consists of basic frame, planing tool, heating plate and support for planing tool and heating plate.  
※ Removable PTFE coated heating plate with separate temperature control system  
※ Electrical planing tool.  
※ Be made of aluminum alloy material, simple structure, small and delicate, user friendly.

型 号	Model	CH-Y250-4M手摇四环对接焊机
焊接规格(mm)	Pipe size(mm)	90,110,125,140,160,180,200,225,250
耗电总功率(KW)	Total power	3.3
工作电压(V)	Working votage	220
加热板最高温度(℃)	Heating plate Max temp	270
总重量(KG)	Overall weight of machine	110
包装尺寸(cm*cm*cm)	Packing size	90*67*54

CH-D200-2M手动二环对接焊机

CH-D160-2M手动二环对接焊机



**用途及特点:**

- ◇适用于HDPE、PVDF、MPP管道的焊接，农用管道焊接；
- ◇由机架、铣刀、加热板、铣刀与加热板支架组成；
- ◇加热板聚四氟乙烯表面涂层；
- ◇电动铣刀；
- ◇机架主要部分为铝合金材料，结构简便，小巧，使用方便。

- ※Suitable for welding of plastic pipes and/ or fittings made of HDPE, PVDF and MPP can be operated in any complex work condition.
- ※Consists of basic frame,planing tool,heating plate and support for planing tool and heating plate.
- ※Removable PTFE coated heating plate with separate temperature control system
- ※Electrical planing tool.
- ※Be made of aluminum alloy material,simple structure,small and delicate,user friendly.

型 号	Model	CH-D200-2M手动二环对接焊机	CH-D160-2M手动二环对接焊机
焊接规格(mm)	Pipe size(mm)	63,75,90,110,125,140,160,180,200	63,75,90,110,125,140,160
耗电总功率(KW)	Total power	2.6	2.3
工作电压(V)	Working votage	220	220
加热板最高温度(℃)	Heating plate Max temp	270	270
总重量(KG)	Overall weight of machine	39	37
包装尺寸(cm*cm*cm)	Packing size	55*47*52	55*47*52

CH-D200-4M手动四环对接焊机

CH-D160-4M手动四环对接焊机



**用途及特点:**

- ◇适用于HDPE、PVDF、MPP管道的焊接，农用管道焊接；
- ◇由机架、铣刀、加热板、铣刀与加热板支架组成；
- ◇加热板聚四氟乙烯表面涂层；
- ◇电动铣刀；
- ◇机架主要部分为铝合金材料，结构简便，小巧，使用方便。

- ※Suitable for welding of plastic pipes and/ or fittings made of HDPE, PVDF and MPP can be operated in any complex work condition.
- ※Consists of basic frame,planing tool,heating plate and support for planing tool and heating plate.
- ※Removable PTFE coated heating plate with separate temperature control system
- ※Electrical planing tool.
- ※Be made of aluminum alloy material,simple structure,small and delicate,user friendly.

型 号	Model	CH-D200-4M手动四环对接焊机	CH-D160-4M手动四环对接焊机
焊接规格(mm)	Pipe size(mm)	63,75,90,110,125,140,160,180,200	63,75,90,110,125,140,160
耗电总功率(KW)	Total power	2.6	2.3
工作电压(V)	Working votage	220	220
加热板最高温度(℃)	Heating plate Max temp	270	270
总重量(KG)	Overall weight of machine	52	48
包装尺寸(cm*cm*cm)	Packing size	67*47*53	67*47*53

CH-D250-2M手动二环对接焊机




**用途及特点:**

- ◇适用于HDPE、PVDF、MPP管道的焊接，农用管道焊接；
- ◇由机架、铣刀、加热板、铣刀与加热板支架组成；
- ◇加热板聚四氟乙烯表面涂层；
- ◇电动铣刀；
- ◇机架主要部分为铝合金材料，结构简便，小巧，使用方便。

※ Suitable for welding of plastic pipes and/ or fittings made of HDPE, PVDF and MPP can be operated in any complex work condition.  
※ Consists of basic frame, planing tool, heating plate and support for planing tool and heating plate.  
※ Removable PTFE coated heating plate with separate temperature control system  
※ Electrical planing tool.  
※ Be made of aluminum alloy material, simple structure, small and delicate, user friendly.

型 号	Model	CH-D250-2M手动二环对接焊机
焊接规格(mm)	Pipe size(mm)	90,110,125,140,160,180,200,225,250
耗电总功率(KW)	Total power	3.3
工作电压(V)	Working votage	220
加热板最高温度(℃)	Heating plate Max temp	270
总重量(KG)	Overall weight of machine	58
包装尺寸(cm*cm*cm)	Packing size	76*55*58

CH-D250-4M手动四环对接焊机

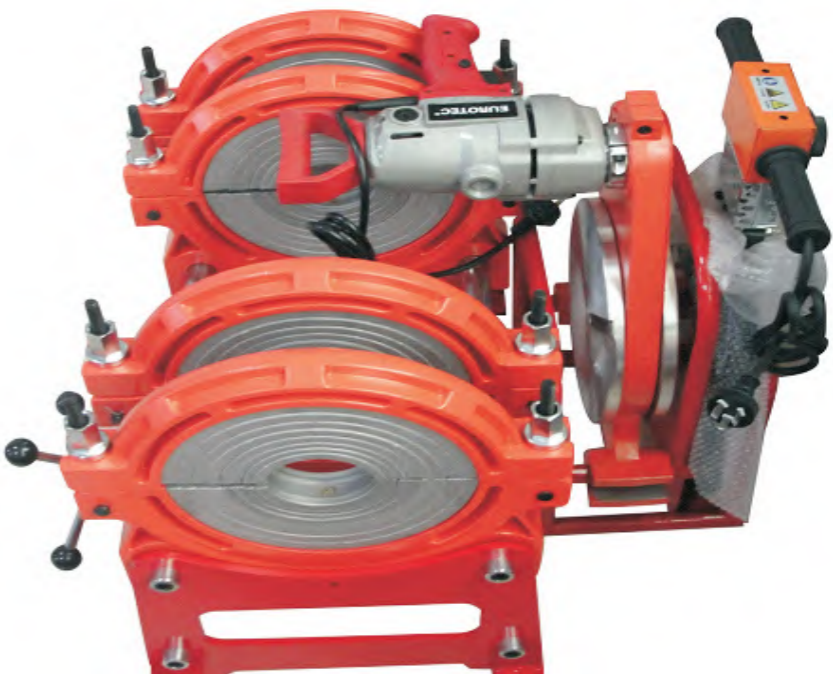

**用途及特点:**

- ◇适用于HDPE、PVDF、MPP管道的焊接，农用管道焊接；
- ◇由机架、铣刀、加热板、铣刀与加热板支架组成；
- ◇加热板聚四氟乙烯表面涂层；
- ◇电动铣刀；
- ◇机架主要部分为铝合金材料，结构简便，小巧，使用方便。

※ Suitable for welding of plastic pipes and/ or fittings made of HDPE, PVDF and MPP can be operated in any complex work condition.  
※ Consists of basic frame, planing tool, heating plate and support for planing tool and heating plate.  
※ Removable PTFE coated heating plate with separate temperature control system  
※ Electrical planing tool.  
※ Be made of aluminum alloy material, simple structure, small and delicate, user friendly.

型 号	Model	CH-D250-4M手动四环对接焊机
焊接规格(mm)	Pipe size(mm)	90,110,125,140,160,180,200,225,250
耗电总功率(KW)	Total power	3.3
工作电压(V)	Working votage	220
加热板最高温度(℃)	Heating plate Max temp	270
总重量(KG)	Overall weight of machine	90
包装尺寸(cm*cm*cm)	Packing size	76*55*58

CH-T110-2M手推二环对接焊机



**用途及特点:**

- ◇适用于HDPE、PVDF、MPP管道的焊接，农用管道焊接；
- ◇由机架、铣刀、加热板、铣刀与加热板支架组成；
- ◇加热板聚四氟乙烯表面涂层；
- ◇电动铣刀；
- ◇机架主要部分为铝合金材料，结构简便，小巧，使用方便。

※ Suitable for welding of plastic pipes and/ or fittings made of HDPE, PVDF and MPP can be operated in any complex work condition.  
※ Consists of basic frame, planing tool, heating plate and support for planing tool and heating plate.  
※ Removable PTFE coated heating plate with separate temperature control system  
※ Electrical planing tool.  
※ Be made of aluminum alloy material, simple structure, small and delicate, user friendly.

型 号	Model	CH-T110-2M手推二环对接焊机
焊接规格(mm)	Pipe size(mm)	40,50,63,75,90,110
耗电总功率(KW)	Total power	2
工作电压(V)	Working votage	220
加热板最高温度(℃)	Heating plate Max temp	270
总重量(KG)	Overall weight of machine	33
包装尺寸(cm*cm*cm)	Packing size	83*45*49

CH-T200-2M手推二环对接焊机

CH-T160-2M手推二环对接焊机



**用途及特点:**

- ◇适用于HDPE、PVDF、MPP管道的焊接，农用管道焊接；
- ◇由机架、铣刀、加热板、铣刀与加热板支架组成；
- ◇加热板聚四氟乙烯表面涂层；
- ◇电动铣刀；
- ◇机架主要部分为铝合金材料，结构简便，小巧，使用方便。

※ Suitable for welding of plastic pipes and/ or fittings made of HDPE, PVDF and MPP can be operated in any complex work condition.  
※ Consists of basic frame, planing tool, heating plate and support for planing tool and heating plate.  
※ Removable PTFE coated heating plate with separate temperature control system  
※ Electrical planing tool.  
※ Be made of aluminum alloy material, simple structure, small and delicate, user friendly.

型 号	Model	CH-T200-2M手推二环对接焊机	CH-T160-2M手推二环对接焊机
焊接规格(mm)	Pipe size(mm)	63,75,90,110,125,140,160,180,200	63,75,90,110,125,140,160
耗电总功率(KW)	Total power	2.6	2.3
工作电压(V)	Working votage	220	220
加热板最高温度(℃)	Heating plate Max temp	270	270
总重量(KG)	Overall weight of machine	37	33
包装尺寸(cm*cm*cm)	Packing size	68*54*53	67*47*53