

# MIMO Omnidirectional Ceiling Antenna IO0660-06360-4P

Used in 2G/3G/4G/5G system


## Electrical specifications

Frequency range (MHz)	617~960	1710~2700	3300~3800	4900~6000
Polarization	Linear * 4			
Gain (dBi)	4	5	6	6
Horizontal beam width (°)	360			
Vertical beam width (°)	80	50	40	50
Non-circularity (dB)	/			
Isolation (dB)	≥16	≥20	≥25	
Impedance (Ω)	50			
VSWR	≤2.0	≤1.8		
Intermodulation IM3 (2×43dBm carrier)	≤-150dBc			
Maximum power (W)	50			
Lighting protection	DC Ground			


## Mechanical specifications

Connector	4*4.3-10 Female or 4* N-Female
Connector position	Bottom
Exposed cable size	30cm (or customer requirement)
Height/width/depth	φ350*45 mm
Packing size	410 * 140 * 420 mm
Weight	1.3 kg
Radome material	ABS
Radome color	White
Operating temperature	-40~60 °C
Application	Indoor
Mounting	Nut


617~960MHz typical pattern:

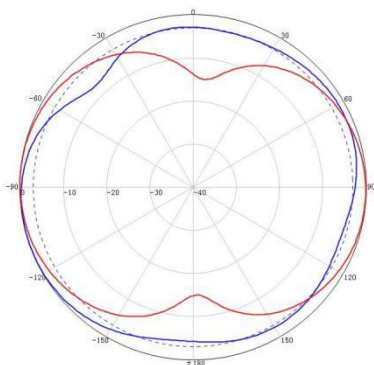

1710~2700MHz typical pattern:

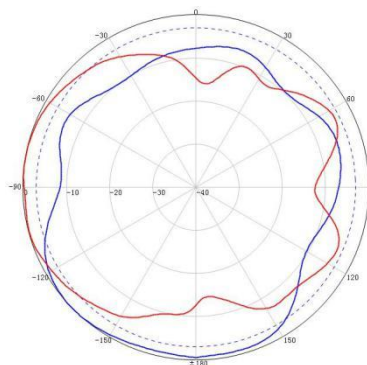


3300~3800MHz typical pattern:

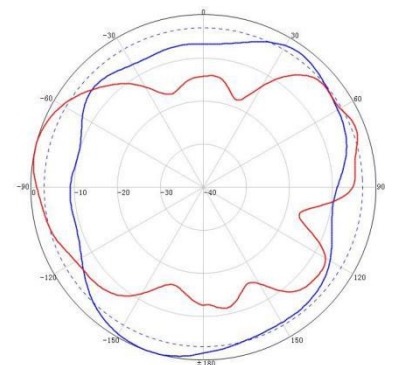


## Product Pictures



## Product Size

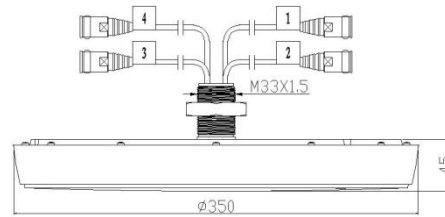

## Installation Sketch

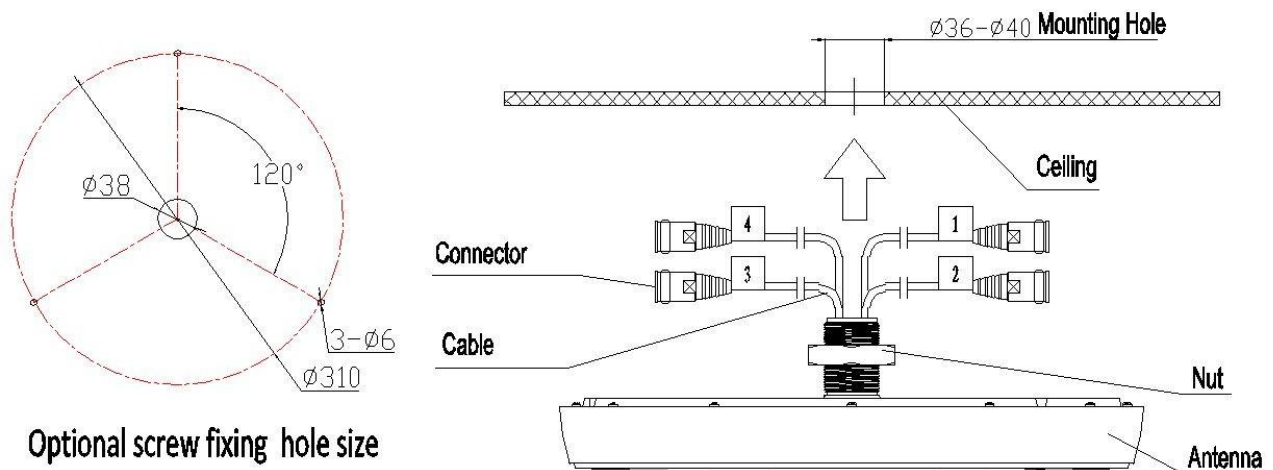

1. Drill a round hole  $\Phi 36\text{mm} \sim \Phi 40\text{mm}$  on the ceiling.
2. Match the antenna to the round hole.
3. Fix the antenna onto the ceiling with the screws.

### Remarks:

The hole on the ceiling must be slightly bigger than the antenna connector flange, and the antenna base plate should be in close contact with the ceiling, which influences the performance of the antenna.