


载荷特性 Load diagrams



60m	2.9	10.7	15	19.4	20	22	25	27	30	32	35	37	40	42	45	47	50	52	55	57	60	m
	10	6.8	5.0	5.0	4.7	4.1	3.7	3.3	3.0	2.8	2.6	2.4	2.2	2.0	1.9	1.8	1.7	1.6	1.52	1.5	t	
55m	2.9	12.8	15	17	20	23.4	25	27	30	32	35	37	40	42	45	47	50	52	55	m		
	10	8.4	7.3	6.0	5.0	5.0	4.6	4.1	3.8	3.5	3.2	3.0	2.8	2.6	2.4	2.3	2.2	2.0	t			
50m	2.9	14.4	15	17	20	22	26	27	30	32	35	37	40	42	45	50	m					
	10	9.6	8.3	6.9	6.8	5.0	5.0	4.7	4.4	4.0	3.8	3.4	3.2	3.0	2.8	2.6	t					
45m	2.9	14.5	15	17	20	22	26.3	27	30	32	35	37	40	42	45	m						
	10	9.6	8.3	6.9	6.2	5.0	5.0	4.7	4.4	4.1	3.7	3.5	3.2	2.95	t							
40m	2.9	14.5	15	17	20	22	26.3	26.8	27	30	32	35	37	40	m							
	10	9.6	8.3	6.9	6.2	5.0	5.0	4.8	4.4	4.2	3.9	3.8	3.6	t								
35m	2.9	14.5	17	19	21	23	25	26.8	27	30	32	35	m									
	10	8.3	7.3	6.5	5.9	5.3	5.0	5.0	4.5	4.2	3.95	t										
30m	2.9	14.5	16	18	20	22	24	26	27	30	m											
	10	8.9	7.8	6.9	6.2	5.6	5.0	5.0	4.7	t												

$$\nabla = \cup - 0.3t$$




标准小车可使用2/4倍绳率。(使用四倍绳率时, 应从二倍率的载荷中减去0.3吨)

Standard trolley 2/4 fall. (When using ∇ subtract 0.3t from the loads \cup)


附着 Anchorages

1.6m x 1.6m

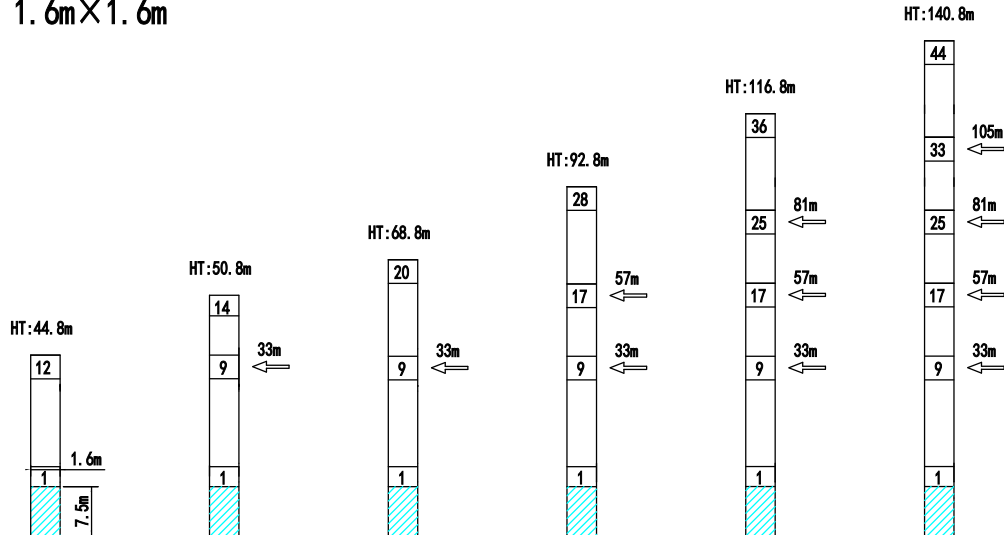

塔身截面 Mast


1.6m x 1.6m

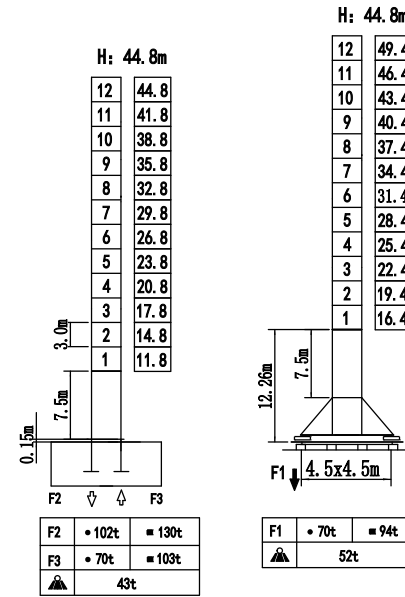

TC6015-10

2.0m x 2.0m

H: 61.6m

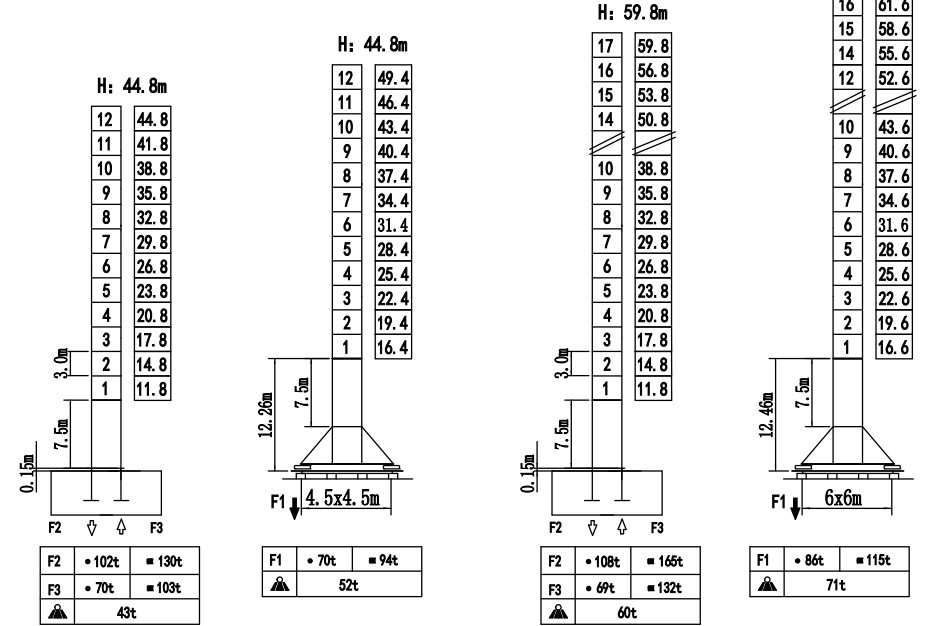

F 反力 Reactions

- 工作状态 in service
- 非工作状态 Out of service

自重 Self-load

不帶载荷及配重 最大臂长及标准高度时的自重

Without load and ballast With longest jib and Free standing height

附着 Anchorages

2.0m x 2.0m

