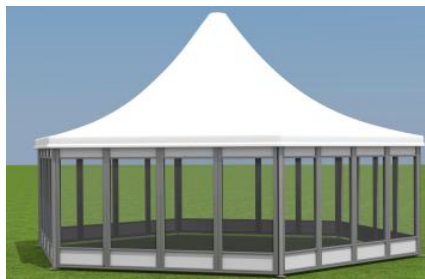
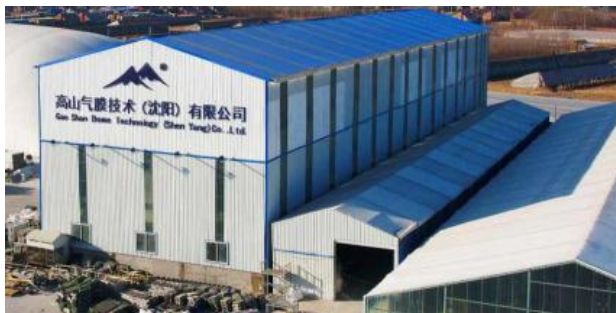








Item	Specification
Clear-span width	10m
Eave Height	2.8m
Ridge Height	4.6m
Side length	5m
Roof pitch	18°
Wind Loading	≤120km/h
Minimum Tent Length	6 m
Roof Fixing	bar tensioning
Framework Profile	48mm * 84mm * 2.7mm
Eave Connection	Hot dip Galvanized aluminium alloy tube
Cover Material	PVC Knife coated nylon fabric; 650g-850g/m2

Optional Accessories

- PVC window sidewalls
- Transparent PVC cover and sidewall
- Lining and curtain
- Door system
- Walling system
- Flooring system
- Weight plate
- Internal Decorative linings



Main Framework Profile Dimension

 <p>2mm 40mm 80mm</p> <p>Roof tension tube</p>	 <p>2mm 40mm 40mm</p> <p>Roof Purlin</p>
 <p>2mm 43mm 71mm</p> <p>Eave Purlin</p>	 <p>2.7mm 48mm 84mm</p> <p>Main frame profile</p>