





High performance cut-off wheel.
Optimised tool life for all steels, stainless steels and castiron.for various cross sections,highest cutting rate,low fatigue operation for the user.Suitable also for high frequency machines.

(FERROUS)



T 41 T 42

DxTxH(inch)	DxTxH(mm)	Max.speed(R.P.M)	
4" x 3/64" x 5/8"	100x1.0x16	15200	800
4" x 1/16" x 5/8"	100x1.6x16	15200	600
4" x 3/32" x 5/8"	100x2.5x16	15200	400
4" x 1/8" x 5/8"	100x3.0x16	15200	400
4 1/2" x 3/64" x 7/8"	115x1.0x22.2	13300	400
4 1/2" x 1/16" x 7/8"	115x1.6x22.2	13300	400
4 1/2" x 3/32" x 7/8"	115x2.5x22.2	13300	200
4 1/2" x 1/8" x 7/8"	115x3.0x22.2	13300	200
5" x 3/64" x 7/8"	125x1.0x22.2	12200	400
5" x 1/16" x 7/8"	125x1.6x22.2	12200	400
5" x 3/32" x 7/8"	125x2.5x22.2	12200	200
5" x 1/8" x 7/8"	125x3.0x22.2	12200	200
6" x 1/16" x 7/8"	150x1.6x22.2	10200	200
6" x 3/32" x 7/8"	150x2.5x22.2	10200	200
6" x 1/8" x 7/8"	150x3.0x22.2	10200	200
7" x 1/12" x 7/8"	180x1.9x22.2	8600	200
7" x 3/32" x 7/8"	180x2.5x22.2	8600	100
7" x 1/8" x 7/8"	180x3.0x22.2	8600	100
9" x 1/12" x 7/8"	230x1.9x22.2	6600	100
9" x 3/32" x 7/8"	230x2.5x22.2	6600	100
9" x 1/8" x 7/8"	230x3.0x22.2	6600	100

高性能切割片。
是加工各种钢材，不锈钢和铸铁的最佳选择
多种用途，在耐用性好的同时，切割极其锋利，大大减轻了操作者的劳动强度。
也可适用于高转速机器。



EXTRA THIN Cut-off wheel for burr-free and fast cutting of sheet metals and thin-walled materials,profiles, tubes,rods,steels cables and composites made of steel and INOX.Few cuttings, high safety a gainst breakage, dustless.Extra long life.

(Fe,S,and C ≤ 0.1%).
Certified for stainless steel.

超薄片用于高精度切割薄壁材料，如方管，棒材，钢缆和复合钢，高安全性能不会破碎，速度快无烧伤，无毛刺，长寿命。
硫、铁、氮含量 ≤ 0.1%
特别适合于不锈钢等其它材料的加工。



T 41 T 42

DxTxH(inch)	DxTxH(mm)	Max.speed(R.P.M)	
4" x 1/32" x 5/8"	100x0.8x16	15200	800
4" x 1/32" x 5/8"	105x0.8x16	15200	800
4 1/2" x 1/32" x 7/8"	115x0.8x22.2	13300	400
5" x 1/32" x 7/8"	125x0.8x22.2	12200	400



Extra Thin cut-off wheel for fast and burr-free cutting of sheet metals,rods, profiles,steel cables and composites made of steel and INOX.High safety a gainst breakage,long life.Suitable also for machines with low performance.

(FERROUS)

超薄片
高精度切割、切割铁板，钢棒，钢缆以及复合钢，速度快无烧伤，非常安全不会破碎、无毛刺、长寿命，适合小功率、低速切割。



T 41

DxTxH(inch)	DxTxH(mm)	Max.speed(R.P.M)	
7" x 1/32" x 1 1/4"	180x0.8x31.75	5300	200
8" x 1/32" x 1 1/4"	200x0.8x31.75	4800	200
9" x 1/32" x 1 1/4"	230x0.8x31.75	4200	200
10" x 1/32" x 1 1/4"	250x0.8x31.75	3800	200






For cutting-off of sheet metals, profiles, tubes and rods made of rust-resistant and acid-proof steels for apparatus and tank engineering, automotive and shipbuilding industries. Suitable for various material cross sections; free, fast and clean cut, low stress load for the machine through high cutting speed, (Fe, S, and Cl \leq 0.1%). Suitable also for high frequency machines. Certified for stainless steel.

用于切割金属板, 方管 and 防锈耐酸处理过的棒材, 如汽车和造船业。适用于各种材料横截面的快速干净切割。低负荷下切割速度仍然很快。硫、铁、氯含量 \leq 0.1% 不锈钢专用。



T 41 T 42

DxTxH(inch)	DxTxH(mm)	Max.speed(R.P.M)	
4 "x3/64" x5/8 "	100x1.0x16	15200	800
4 "x1/16" x5/8 "	100x1.6x16	15200	600
4 "x3/32" x5/8 "	100x2.5x16	15200	400
4 "x1/8" x5/8 "	100x3.0x16	15200	400
4 1/2 "x3/64" x7/8 "	115x1.0x22.2	13300	400
4 1/2 "x1/16" x7/8 "	115x1.6x22.2	13300	400
4 1/2 "x3/32" x7/8 "	115x2.5x22.2	13300	200
4 1/2 "x1/8" x7/8 "	115x3.0x22.2	13300	200
5 "x3/64" x7/8 "	125x1.0x22.2	12200	400
5 "x1/16" x7/8 "	125x1.6x22.2	12200	400
5 "x3/32" x7/8 "	125x2.5x22.2	12200	200
5 "x1/8" x7/8 "	125x3.0x22.2	12200	200
6 "x1/16" x7/8 "	150x1.6x22.2	10200	200
6 "x3/32" x7/8 "	150x2.5x22.2	10200	200
6 "x1/8" x7/8 "	150x3.0x22.2	10200	200
7 "x1/12" x7/8 "	180x1.9x22.2	8600	100
7 "x3/32" x7/8 "	180x2.5x22.2	8600	100
7 "x1/8" x7/8 "	180x3.0x22.2	8600	100
9 "x1/12" x7/8 "	230x1.9x22.2	6600	100
9 "x3/32" x7/8 "	230x2.5x22.2	6600	100
9 "x1/8" x7/8 "	230x3.0x22.2	6600	100

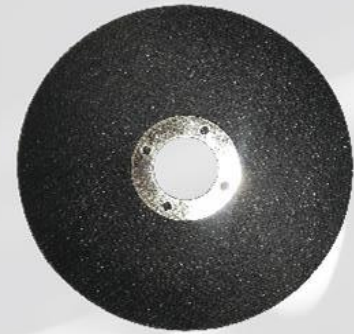

Soft Cut-off wheel, in particular for aluminium and its alloys, bronze, copper and other non-ferrous metals. Very good cutting performance with long tool life, no tool clogging (IRON-FREE)

用于铝材, 铜和其它有色金属的切割。高效率, 长寿命, 不堵塞。



T 41 T 42

DxTxH(inch)	DxTxH(mm)	Max.speed(R.P.M)	
4 "x3/64" x5/8 "	100x1.0x16	15200	800
4 "x1/16" x5/8 "	100x1.6x16	15200	600
4 "x3/32" x5/8 "	100x2.5x16	15200	500
4 "x1/8" x5/8 "	100x3.0x16	15200	400
4 1/2 "x3/64" x7/8 "	115x1.0x22.2	13300	400
4 1/2 "x1/16" x7/8 "	115x1.6x22.2	13300	400
4 1/2 "x3/32" x7/8 "	115x2.5x22.2	13300	200
4 1/2 "x1/8" x7/8 "	115x3.0x22.2	13300	400
5 "x3/64" x7/8 "	125x1.0x22.2	12200	400
5 "x1/16" x7/8 "	125x1.6x22.2	12200	400
5 "x3/32" x7/8 "	125x2.5x22.2	12200	200
5 "x1/8" x7/8 "	125x3.0x22.2	12200	200
6 "x1/16" x7/8 "	150x1.6x22.2	10200	200
6 "x3/32" x7/8 "	150x2.5x22.2	10200	200
6 "x1/8" x7/8 "	150x3.0x22.2	10200	200
7 "x1/12" x7/8 "	180x1.9x22.2	8600	100
7 "x3/32" x7/8 "	180x2.5x22.2	8600	100
7 "x1/8" x7/8 "	180x3.0x22.2	8600	100
9 "x1/12" x7/8 "	230x1.9x22.2	6600	100
9 "x3/32" x7/8 "	230x2.5x22.2	6600	100
9 "x1/8" x7/8 "	230x3.0x22.2	6600	80





General purpose cut-off wheel for concrete, soft and hard stone, usual building materials (with the exception of natural stone). long life, good price/performance ratio.

用于切割混凝土, 石材, 建筑材料, 长寿命, 高性价比。



T 41



T 42



DxTxH(inch)	DxTxH(mm)	Max.speed(R.P.M)	Weight
4 "x1/16" x5/8 "	100x1.6x16	15200	600
4 "x3/32" x5/8 "	100x2.5x16	15200	400
4 "x1/8" x5/8 "	100x3.0x16	15200	400
4 1/2 "x1/16" x7/8 "	115x1.6x22.2	13300	400
4 1/2 "x3/32" x7/8 "	115x2.5x22.2	13300	200
4 1/2 "x1/8" x7/8 "	115x3.0x22.2	13300	200
5 "x1/16" x7/8 "	125x1.6x22.2	12200	400
5 "x3/32" x7/8 "	125x2.5x22.2	12200	200
5 "x1/8" x7/8 "	125x3.0x22.2	12200	200
6 "x1/16" x7/8 "	150x1.6x22.2	10200	200
6 "x3/32" x7/8 "	150x2.5x22.2	10200	200
6 "x1/8" x7/8 "	150x3.0x22.2	10200	200
7 "x1/12" x7/8 "	180x1.9x22.2	8600	100
7 "x3/32" x7/8 "	180x2.5x22.2	8600	100
7 "x1/8" x7/8 "	180x3.0x22.2	8600	100
9 "x1/12" x7/8 "	230x1.9x22.2	6600	100
9 "x3/32" x7/8 "	230x2.5x22.2	6600	100
9 "x1/8" x7/8 "	230x3.0x22.2	6600	100



General purpose cut-off wheel for thin-walled profiles made of steel, INOX. Optimized bond for long tool life. clean and burr-free cut. Ideally suited for low capacity machines up to 3 kW.

一般用于切割薄壁的钢材, 不锈钢及韧性较好的材料。长寿命不烧伤工件, 是小功率机器 (≤3千瓦) 切割的理想产品。



T 41



DxTxH(inch)	DxTxH(mm)	Max.speed(R.P.M)	Weight
12 "x3/32" x1 "	305x2.4x25.4	5100	25
12 "x7/64" x1 "	305x2.8x25.5	5100	25
12 "x1/8" x1 "	305x3.2x25.5	5100	25
14 "x3/32" x1 "	355x2.4x25.4	4400	25
14 "x7/64" x1 "	355x2.8x25.5	4400	25
14 "x1/8" x1 "	355x3.2x25.5	4400	25
16 "x1/8" x1 "	400x3.2x25.5	3800	25



General purpose cut-off wheel for thin-walled profiles made of steel, INOX. Optimized bond for long tool life. clean and burr-free cut. Ideally suited for low capacity machines up to 3 kW.

一般用于切割薄壁的钢材, 不锈钢及韧性较好的材料。长寿命不烧伤工件, 是小功率机器 (≤3千瓦) 切割的理想产品。



T 41



DxTxH(inch)	DxTxH(mm)	Max.speed(R.P.M)	Weight
12 "x3/32" x1 "	305x2.4x25.4	5100	25
12 "x7/64" x1 "	305x2.8x25.5	5100	25
12 "x1/8" x1 "	305x3.2x25.5	5100	25
14 "x3/32" x1 "	355x2.4x25.4	4400	25
14 "x7/64" x1 "	355x2.8x25.5	4400	25
14 "x1/8" x1 "	355x3.2x25.5	4400	25
16 "x1/8" x1 "	400x3.2x25.5	3800	25





General purpose cut-off wheel for steel, INOX and cast iron. Suitable for all material cross section. Fast, clean and bur-free cut. Not suitable for low capacity machines (3 to 5 kW)

用于切割钢材，不锈钢和铸铁，及所有材料横截面的切割。
快速，切割干净无烧伤
适用于不低于3-5kw功率的机器



T41

DxTxH(inch)	DxTxH(mm)	Max.speed(R.P.M)	
10 "x1/8" x1 "	250x3.2x25.4	6100	50
12 "x1/8" x1 "	305x3.5x25.4	5100	25
12 "x5/32" x1 "	305x4.0x25.4	5100	25
14 "x1/8" x1 "	355x3.5x25.4	4400	25
14 "x5/32" x1 "	355x4.0x25.4	4400	25
16 "x5/32" x1 "	400x4.0x25.4	3800	25



General purpose cut-off wheel for stone, concrete, grey cast iron and non-ferrous metals. Glear cut, no tool clogging. suitable for machines of up to 3 to 5kW.

用于切割石材，混凝土，铸铁和有色金属。
切割干净，不堵塞，适用于不低于3-5kw功率机器。



T41

DxTxH(inch)	DxTxH(mm)	Max.speed(R.P.M)	
10 "x1/8" x1 "	250x3.2x25.4	6100	50
12 "x1/8" x1 "	305x3.5x25.4	5100	25
12 "x5/32" x1 "	305x4.0x25.4	5100	25
14 "x1/8" x1 "	355x3.5x25.4	4400	25
14 "x5/32" x1 "	355x4.0x25.4	4400	25
16 "x5/32" x1 "	400x4.0x25.4	3800	25



General purpose cut-off wheel for metal, steel and cast iron.

用于高速汽油锯切割一般金属，铸铁等，线速度100m/s



T41

DxTxH(inch)	DxTxH(mm)	Max.speed(R.P.M)	
12 "x1/8" x20mm	305x3.5x20	6300	25
12 "x1/8" x7/8 "	305x3.5x22.2	6300	25
12 "x1/8" x1 "	305x3.5x25.4	6300	25
14 "x5/32" x20mm	355x4.0x20	5500	25
14 "x5/32" x7/8 "	355x4.0x22.2	5500	25
14 "x5/32" x1 "	355x4.0x25.4	5500	25
16 "x5/32" x1 "	400x4.0x25.4	4800	25





Special cut-off wheel for track superstructures;used for cutting-off of railway tracks,such as UIC 60, UIC 100,S33,S49,and others. Fast and burr-free cut,very long tool life.

专为切割钢轨研制的特殊切割片。用于切割钢轨，如UIC 60 UIC 100, S33, 349。具有切割速度快，无烧伤和长寿命等特点。线速度100m/s

Use with retaining bracket only.




T 41

DxTxH(inch)	DxTxH(mm)	Max.speed(R.P.M)	
12 "x1/8" x20mm	305x3.5x20	6300	25
12 "x1/8" x7/8"	305x3.5x22.2	6300	25
12 "x1/8" x1"	305x3.5x25.4	6300	25
14 "x5/32" x20mm	355x4.0x20	5500	25
14 "x5/32" x7/8"	355x4.0x22.2	5500	25
14 "x5/32" x1"	355x4.0x25.4	5500	25
16 "x5/32" x1"	400x4.0x25.4	4800	25



Most efficient cutting performance: 最高的切割效率



使用须知：
一直在运动下切割
不要对机器施压
避免降低机器的转速。

Instructions for use:

- Always cut-off under oscillating movement.
- Do not apply work pressure to the machine.
- Avoid a drop in the machine' s speed.



Special cut-off wheel made of SIC and REGULAR CORUNDUM;for cutting ductile cast iron pipes.Suitable also for universal use for cutting stone and metallic materials.

选用优质碳化硅和刚玉特殊研制的切割片。用于高速汽油锯切割球墨铸铁，所有石材、含金属材料的混凝土等。线速度100m/s



T 41

DxTxH(inch)	DxTxH(mm)	Max.speed(R.P.M)	
12 "x1/8" x20mm	305x3.5x20	6300	25
12 "x1/8" x7/8 "	305x3.5x22.2	6300	25
12 "x1/8" x1 "	305x3.5x25.4	6300	25
14 "x5/32" x20mm	355x4.0x20	5500	25
14 "x5/32" x7/8"	355x4.0x22.2	5500	25
14 "x5/32" x1"	355x4.0x25.4	5500	25
16 "x5/32" x1"	400x4.0x25.4	4800	25



Long-life grinding wheel with high abrasion effect.Suitable for high-and low-alloyed steels,cast iron as well as welding seam grinding and flame cut edge grinding.

高效率长寿命角磨片。适用于，高低碳钢，铸铁，和焊点毛刺



T 27

DxTxH(inch)	DxTxH(mm)	Max.speed(R.P.M)	
4 "x1/4" x5/8"	100x6.0x16	15200	200
4 1/2 "x1/4" x7/8"	115x6.0x22.2	13300	100
5 "x1/4" x7/8"	125x6.0x22.2	12200	100
6 "x1/4" x7/8"	150x6.0x22.2	10200	100
7 "x1/4" x7/8"	180x6.0x22.2	8500	50
9 "x1/4" x7/8"	230x6.0x22.2	6600	50





Special wheel for tank and pipeline construction; suitable for cutting, grinding, groove grinding and welding seam machining. Developed, in particular, for stainless steels and austenitic steels. Long-life with high abrasion effect. General purpose grinding wheel for steel and INOX (Fe, S, and CI ≤ 0.1%). Certified for stainless steel.

高效率长寿命的磨片，适合高低碳钢，铸铁以及清除焊点。
硫、铁、氯含量 ≤ 0.1%
不锈钢专用。



T27

DxTxH(inch)	DxTxH(mm)	Max.speed(R.P.M)	
4 "×1/4" ×5/8"	100×6.0×16	15200	200
4½ "×1/4" ×7/8"	115×6.0×22.2	13300	100
5 "×1/4" ×7/8"	125×6.0×22.2	12200	100
6 "×1/4" ×7/8"	150×6.0×22.2	10200	80
7 "×1/4" ×7/8"	180×6.0×22.2	8500	60
9 "×1/4" ×7/8"	230×6.0×22.2	6600	40



Soft wheel, in particular for aluminum and its alloys, bronze, copper and other non-ferrous metals. very good cutting performance with long tool life, no tool clogging (IRON-FREE)

锋利型，一般用于铝合金，铜和其它有色金属。
非常高效长寿命，不堵塞。



T27

DxTxH(inch)	DxTxH(mm)	Max.speed(R.P.M)	
4 "×1/4" ×5/8"	100×6.0×16	15200	200
4½ "×1/4" ×7/8"	115×6.0×22.2	13300	100
5 "×1/4" ×7/8"	125×6.0×22.2	12200	100
6 "×1/4" ×7/8"	150×6.0×22.2	10200	80
7 "×1/4" ×7/8"	180×6.0×22.2	8500	60
9 "×1/4" ×7/8"	230×6.0×22.2	6600	40



General purpose grinding wheel for machining stone and concrete. Suitable also for machining cast materials. Long life. Good price-performance ratio.

用于加工石材，混凝土，也适用于加工铸铁材料。
长寿命，高性价比



T27

DxTxH(inch)	DxTxH(mm)	Max.speed(R.P.M)	
4 "×1/4" ×5/8"	100×6.0×16	15200	200
4½ "×1/4" ×7/8"	115×6.0×22.2	13300	100
5 "×1/4" ×7/8"	125×6.0×22.2	12200	100
6 "×1/4" ×7/8"	150×6.0×22.2	10200	100
7 "×1/4" ×7/8"	180×6.0×22.2	8500	50
9 "×1/4" ×7/8"	230×6.0×22.2	6600	50



T27a Flexible grinding wheel

MATERIAL & APPLICATION:

AC: suitable for general metal edges of the grinding burrs and weld.
 WA: apply to ordinary stainless steel ball, tube, rod and weld grinding.
 C/C C: Suitable for glass, stone, metal and soft metal polish.

Note points:

This series is suitable for portable, stationary and portable grinding machine grinding machine.
 Correct specification control 15-30 grinding method.1
 Standard wheel installed correctly, the idle 1-2min before use.
 With the grinding wheel and cutting operation is strictly prohibited.
 please read before use" instructions.
 Prohibited the use of orange overload.


可弯曲磨片

材料以及用途:

AC: 适用于一般金属边缘的磨削或除焊点。
 WA: 适用于普通不锈钢方管, 棒材和焊点的磨削。
 C/GC: 适用于玻璃, 石材, 金属和软金属的抛光。

注意事项:

这个系列适用于便携式角磨机。
 正确的磨削角度是15-30度
 安装正确后空转1-2分钟再使用
 禁止切割使用

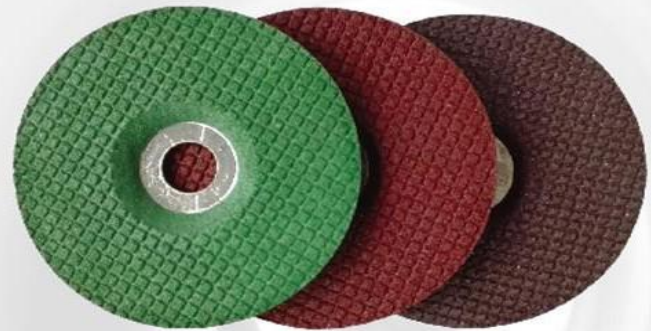

T27

DxTxH(inch)	DxTxH(mm)	Material	Max.speed(R.P.M)	
4 "x3/32" x5/8"	102x2.8x16	AC	13700	400
4 "x3/32" x5/8"	102x2.8x16	WA	13700	400
4 "x3/32" x5/8"	102x2.8x16	GC	13700	400



Highest grinding efficiency at consistent results and long tool life. High degree of flap utilization. Low-vibration and low-noise due to reduced weight and specific damping of flaps. Use, in particular, for surface grinding and polishing, for removal of welding spots and seams, for easy deburring and grinding of filling compounds. High-performance tool with a backing pad made of resin glass fibre bond, showing no signs of scratch marks when contacting the workpiece. A special adhesive ensures that the abrasive cloth (aluminium oxide cloth with backing) is undetachably bonded to the glass fibre body.

该百叶片采用最好锆刚玉、煅烧棕刚玉砂布, 磨削效率高, 长寿命。
 很高折叶片使用率, 低噪音, 不震手。
 用于表面的磨削和抛光, 去除焊点和焊缝



29 T27

DxH(inch)	DxH(inch)	Max.speed(R.P.M)	
4 "x5/8"	100x16	15200	200
4 1/2 "x7/8"	115x22.2	13300	200
5 "x7/8"	125x22.2	12200	200
6 "x7/8"	150x22.2	10200	120
7 "x7/8"	180x22.2	8500	120

CUP GRINDING WHEEL

Grinding common non-ferrous metal,copper,aluminium,concrete and artificial.
Grinding natural stone,artificial stone,concrete,glass,non-ferrous plastic and brick.

专业磨一般有色金属、铜、铝、混凝土及人造石材。
专业磨天然石块、人造石材、混凝土、玻璃、非金属塑料、砖块。

DxDxTxH (mm)

75x65x32x16mm or 22mm
75x63x32xM14 or 5/8" -11
75x55x45x16mm
80x80x31x16mm or 22mm
80x60x30x M14 or 5/8" -11
100x80x50x M14 or 5/8" -11
110x90x55x M14 or 5/8" -11
110x90x55x22mm
125x95x55x M14 or 5/8" -11



50x50x75x M14 or 5/8" -11
100x100x50x M14 or 5/8" -11
125x125x50x M14 or 5/8" -11
150x150x65x M14 or 5/8" -11



RUBBING BRICK

Grinding natural stone,artificial stone,concrete,glass,non-ferrous plastic and brick.

专业磨天然石块、人造石材、混凝土、玻璃、非金属塑料、砖块。

DxWxT (mm)

75x50x50
100x50x50
150x50x50
200x50x50
150x70x30
150x90x35



ICONS

Safety and Operation Instructions

安全图标和操作说明

- | | | | |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|
|  For portable machines
角磨机切割图 |  For benchgrinders
台式砂轮机 | | |
|  For stationary cutting
角磨机磨削图 |  For finishing operations
高速直磨机 |  For stationary cutting machines up to 2KW
轻便式切割机 ≤2KW |  For portable gasoline-driven saws
汽油锯 |
|  For rough grinding on portable machines
For walk-behind saws
湿式磨光机 |  For unmounted wheels
抛光机 |  For stationary cutting machines up to 2KW
固定式切割机 ≤2KW |  For walk-behind saws
马路切割机 |
|  Steel, Structural steels, high-strength
普通钢材、结构钢 |  Ductile cast iron pipes
Grey cast iron, spheroidal cast iron, cast steel and malleable cast iron
铸铁 |  Stone, general purpose
石材 | |
|  Steel sheets, thin-walled profiles
管材、薄壁板 |  Aluminium, Non-ferrous metals in general
铝材和有色金属 |  Concrete, reinforced
混凝土预制件 |  Cellular concrete
Pumice blocks
混凝土砂砖 |
|  Stainless steels, high-alloyed
Stainless steels, low-alloyed
不锈钢型材、板材 |  Rail tracks
钢轨 |  Exposed aggregate
Concrete
露石混凝土 |  Marble
大理石 |
|  Stainless steels, VA-steel sheet
不锈钢VA钢板 |  Tool steel
工具钢 |  Granite
花岗岩 |  Clinker
Refractory bricks
Sandstone bricks
耐火砖 |
|  Structural steels in general
型材钢 |  Austenitic steels
Titanium
奥氏体不锈钢 |  Tiles, ceramics
瓷砖 |  Roof-tiles
Clay pipes
瓦楞铁 |
| | |  Plastics, PVC, etc.
塑料PVC |  Asphalt
沥青 |
|  Follow safety instructions.
安全操作说明 |  Wear ear protection.
佩戴耳罩 |  Wear protective gloves.
佩戴手套 | |
|  Wear protective goggles.
佩戴防护镜 |  Wear protective mask.
佩戴口罩 |  Do not use if damaged.
破损禁用 | |
|  Do not use for wet cutting.
不能湿切 |  Do not use for side grinding.
禁止侧磨 |  Do not use for freehand cutting.
禁止切割 | |

Sales Network

The company's leading products include more than 1000 varieties of models, marketing in Asia, America, Europe more than thirty countries and regions.

