


标示	更改内容	签名	日期
△			
△			
△			

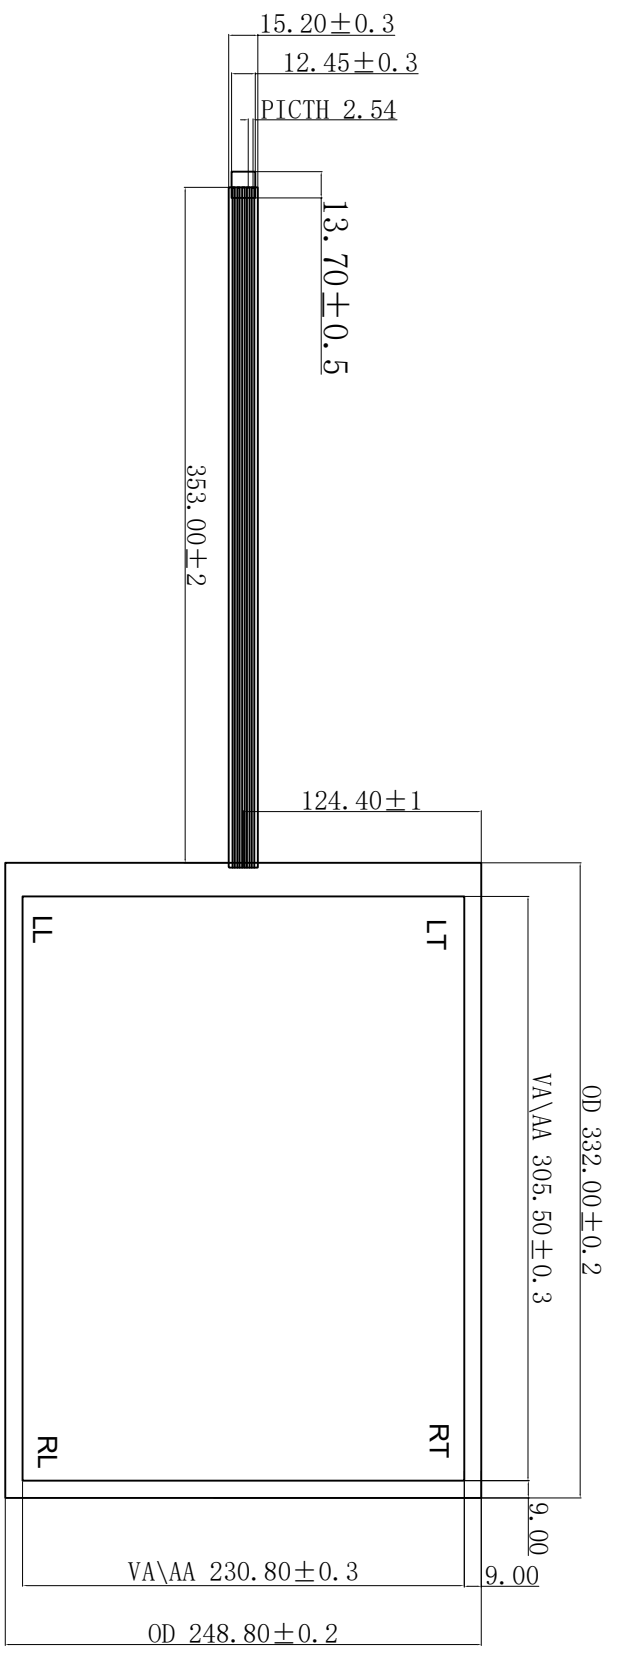


端子 T=2.42

Technical parameters:

1. Operating temperature: -20°C~+70°C;
Storage temperature: -30°C~+80°C。
2. Operation life span >35,000,000次。
3. Linear ≤2.0%
4. Structure: films+glass+FPC (Matte anti-scratch)
- ITO Film type: Anti-glare and anti-newton ring coating
5. 产品回路电阻: 30-300 Ω。
6. Lead line :FPC
7. Operating pressure : 20-150g。
8. Transparent ≥78 ±2%。
9. Surface hardness ≥3H。
11. Unmarked tolerance: ±0.3mm

Logic diagram

1	RT
2	LT
3	SG
4	LL
5	RL

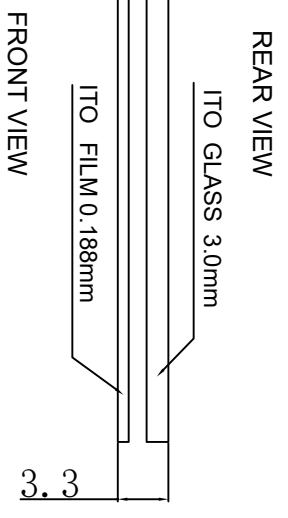

SCALE: 1 : 1 NOT TO SCALE		PAGE: 1 OF 1		UNITS MM		 Reshine Display (HK) Technology Co., Limited Tel: 0755-29190292 Fax: 0755-29190291	
GENERAL TOL. 0.20mm		APPROVALS		DATE		MODEL NUMBER :	
1		APP		2016-07-26		RXF-15002-01	
2		CHK		2016-07-26		CUSTOMER P/N :	
3		DWN		2016-07-26		DATE: 2016-07-26	