
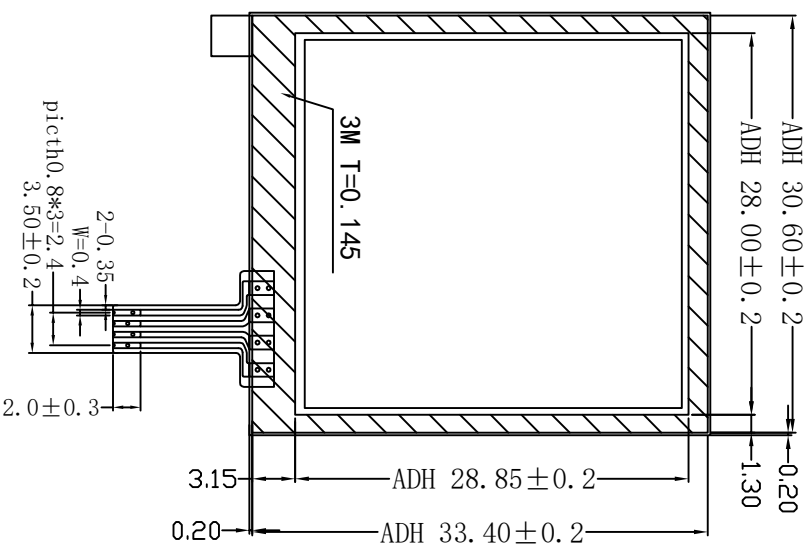
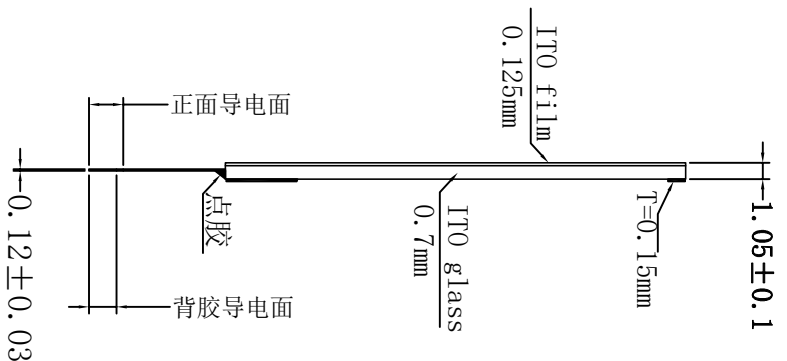
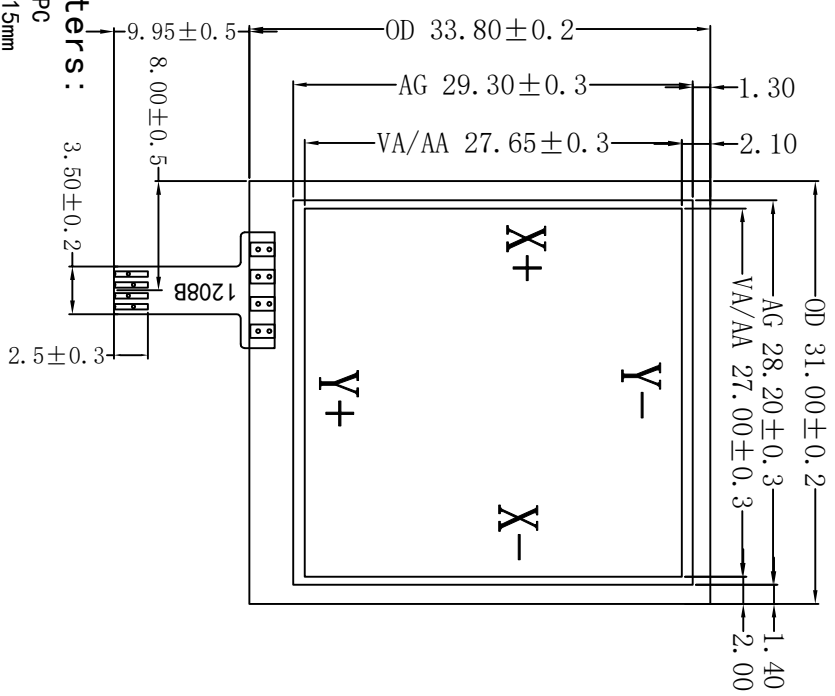


1	PIN OUT
1	X+
2	X+
3	X-
4	Y-

Front view

Side view

Back view



**Technical parameters:**

1. Structure: film+glass+FPC
2. Total thickness: 1.2±0.15mm
3. Circuit level: DC5V 1mA
3. Insulation resistance: ≥20MΩ (25V DC)
4. Linear: ≤1.8%
5. Transparent rate: ≥78%
6. Operating pressure: 50-120g
7. Operational life spa: ≥1,000,000 times
8. Life span with pen operation: ≥50,000 times
9. Operating temperature: -10°C~+60°C
10. Storage temperature: -20°C~+70°C
11. X: 280-600Ω Y: 300-900Ω
12. Unmarked tolerance: ±0.2mm
13. Meet ROHS environmental requirements

REV.	DESCRIPTION	DATE
	First version	2016-09-27

Reshine Display (HK) Technology Co., Limited

SCALE: 1 : 1 NOT TO SCALE	UNITS MM
PAGE: 1 OF 2	
GENERAL TOL. 0.20mm	
APPROVALS	DATE
APP Mychan	2016-09-27
CHK Amor11	2016-09-27
DWN Amor11	2016-09-27

MODEL NUMBER :	RXA-014007-03
CUSTOMER P/N :	
DATE:	2016-09-27