



PIN1 ~ PIN3	300 ~ 900 Ω
PIN2 ~ PIN4	150 ~ 500 Ω

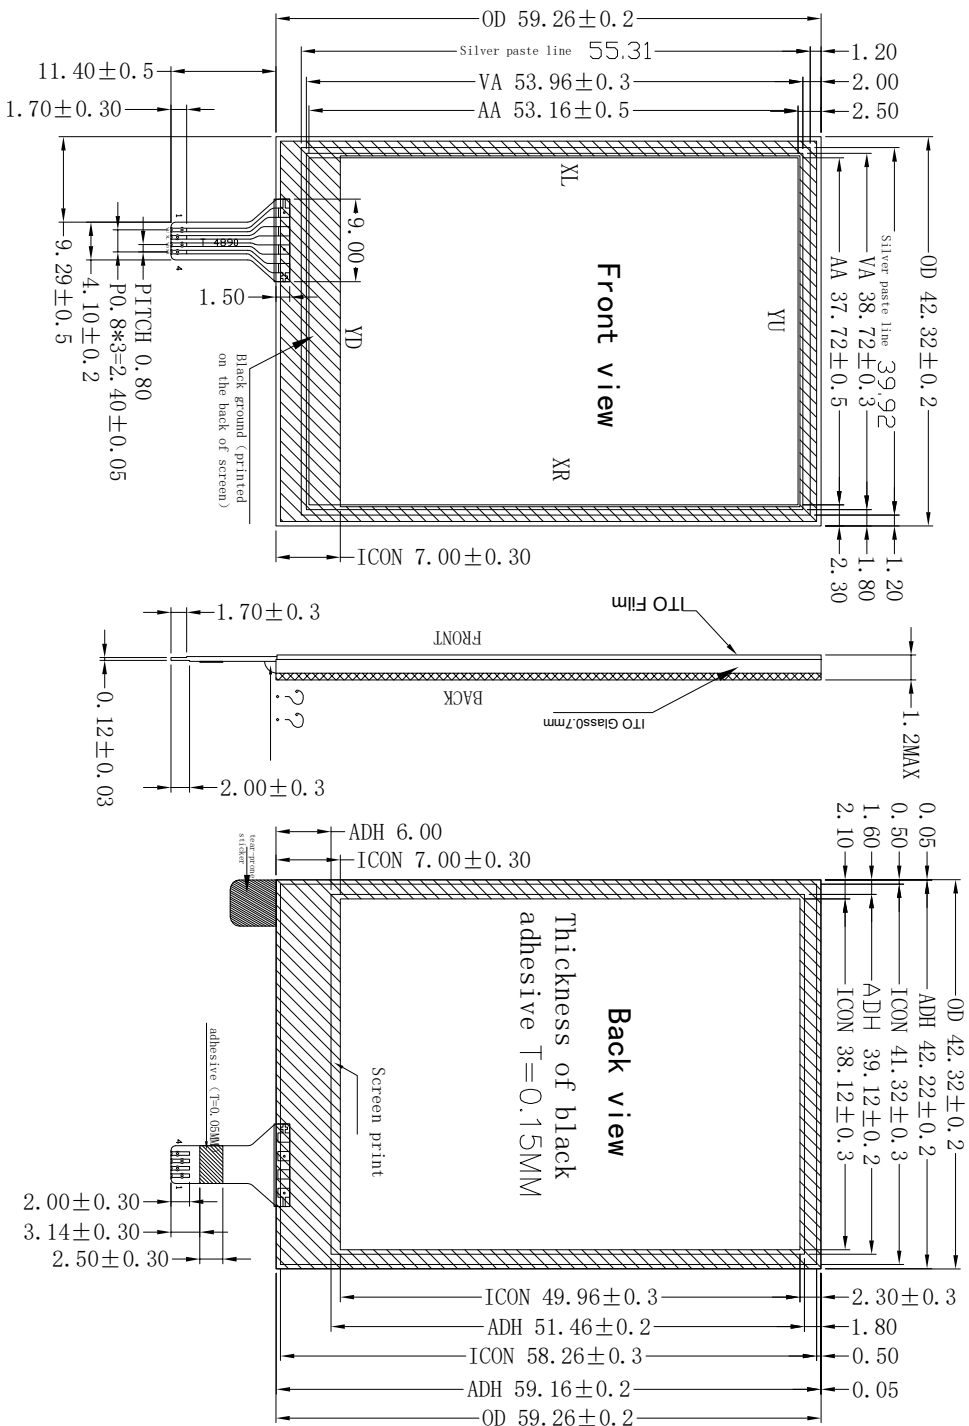

**Technical parameters:**

1. Structure: films+glass+PPC
2. Total thickness: 1.2±0.15mm
3. Insulation resistance: ≥20MΩ (25V DC)
4. Linear: ≤1.5%
5. Transparent rate: ≥80%
6. Operating pressure: 50~120g
7. Operational life spa: ≥1,000,000 times
8. Life span with pen operation: ≥50,000 times
9. Operating temperature: -20°C~+70°C
10. Storage temperature: -30°C~+80°C
11. X:280~600Ω Y:300~900Ω.
12. Unmarked tolerance: ±0.2mm
13. Meet RoHS environmental requirements



PIN	WIRING
1	YU
2	XL
3	YD

SCALE: 1 : 1 NOT TO SCALE	<p>Reshine Display (HK) Technology Co., Limited</p>	<p>Tel: 0755-29190292 Fax: 0755-29190291</p>
PAGE: 1 OF 2		
GENERAL TOL. 0.20mm	UNITS MM	
APPROVALS	DATE	MODEL NUMBER :
APP Mychan	2015-12-23	RXA-024016-01
CHK Amor11	2015-12-23	TP-T024SQ1-04
		PROJECTION
		Product No : DATE: 2015-12-23