PIN1~PIN3	180-1100ohm
PIN2~PIN4	180-1100ohm

REV.	DESCRIPTION	DATE
A/0	First view	2016-11-23

Front view

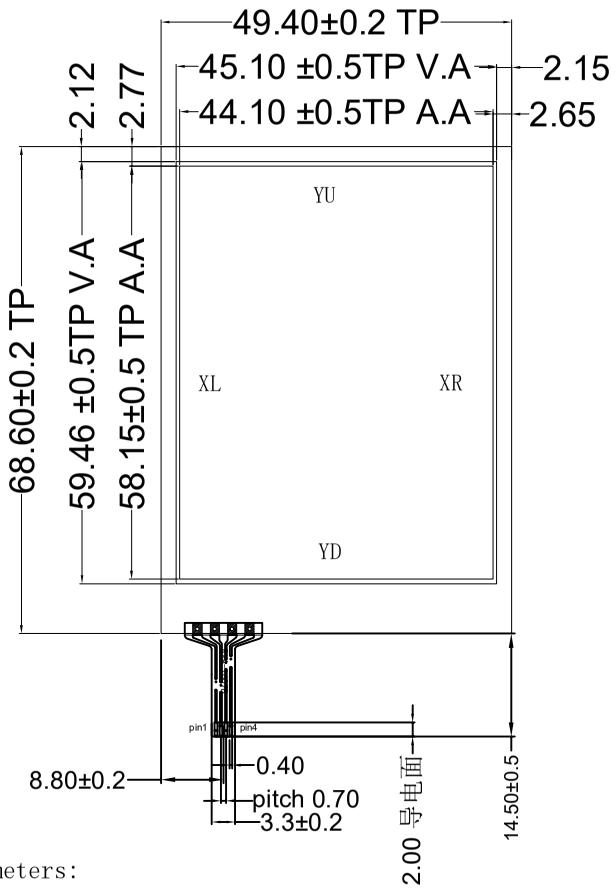

Side view

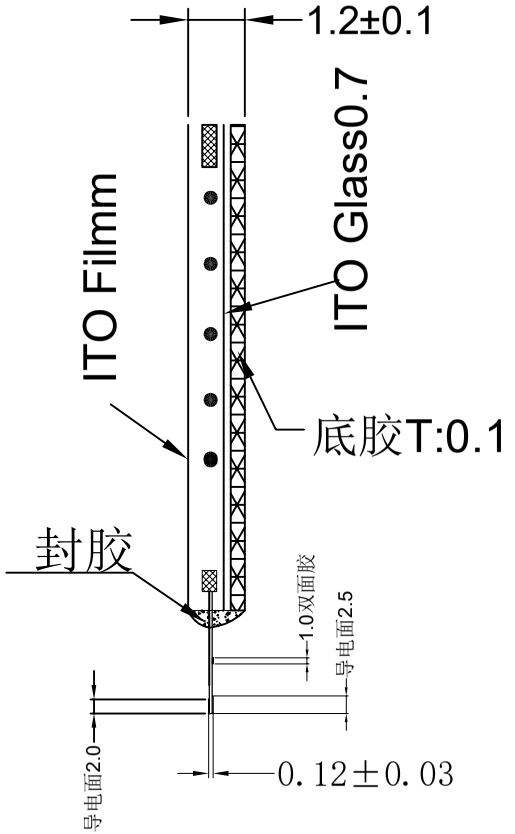

Back view

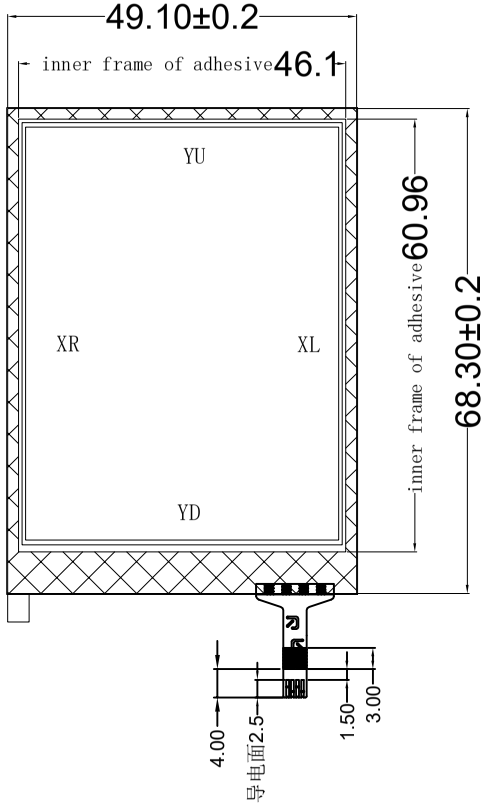

Technical parameters:

1. Structure: films+glass+FPC(Matte anti-scratch)
2. Total thickness:1.2±0.15mm
2. Circuit level: DC5V 1mA
3. Insulation resistance: ≥20MΩ(25V DC)
4. Linear: ≤1.5%
5. Transparent rate: ≥78%
6. Operating pressure: 50-120g
7. Operational life spa: ≥1,000,000 times
8. Life span with pen operation: 100,000 times
9. Operating temperature: -20℃~+70℃
10. Storage temperature: -30℃~+80℃
11. X:280-600Ω Y:300-900Ω.
12. Unmarked tolerance: ±0.2mm
13. Meet ROHS environmental requirements

pin out	
1	YD
2	XL
3	YU
4	XR

SCALE: 1 : 1 NOT TO SCALE		
PAGE:		
GENERAL TOL. 0.20mm		UNITS MM
APPROVALS		DATE
APP	Mychan	2016-11-23
CHK	Amorll	2016-11-23
DRAWN	Andyxl	2016-11-23

Reshine Display (HK) Technology Co.,Limited

Tel:0755-29190292 Fax:0755-29190291

MODEL NUMBER :

RXA-028004-09

PROJECTION

CUSTOMER P/N :

DATE:
2016-11-23

由 Autodesk 教育版产品制作