



REV.	DESCRIPTION	DATE
A/0	First version	2018-06-02


PIN	SYMBOL
1	YU
2	XL
3	YD
4	XR




Front view

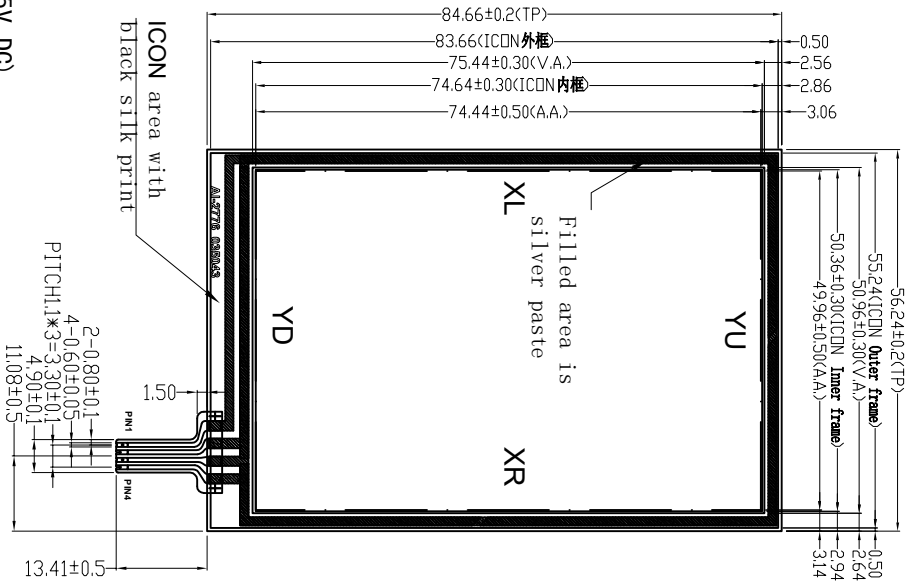

Side view

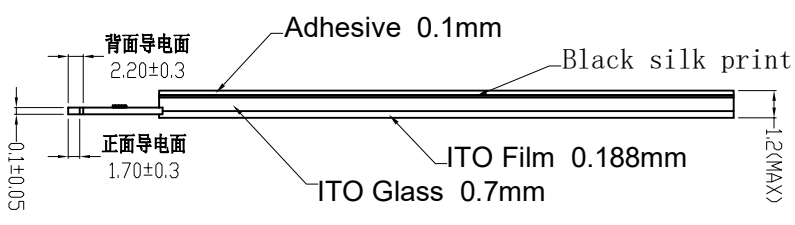

Back view

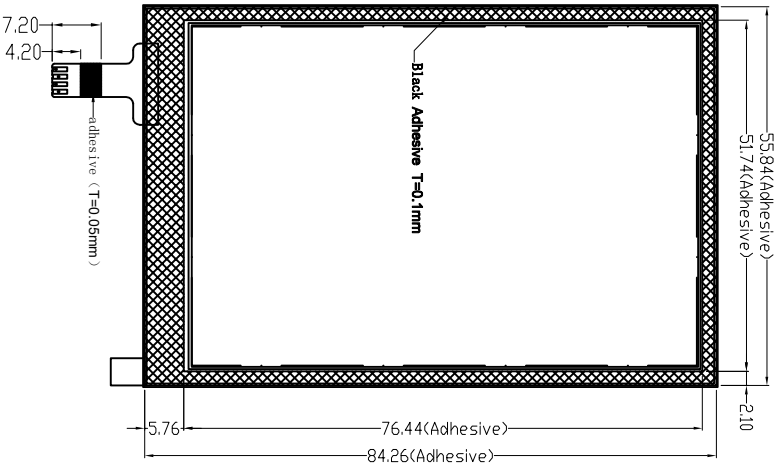

Technical parameters:

1. Structure: film+glass+FPG
2. Total thickness:  $1.2 \pm 0.15\text{mm}$
3. Circuit level: DCSV 1mA
4. Insulation resistance:  $\geq 20\text{M}\Omega$  (25V DC)
5. Linear:  $\leq 1.5\%$
6. Transparent rate:  $\geq 78\%$
7. Operating pressure: 50-120g
8. Operational life spa:  $\geq 1,000,000$  times
9. Life span with pen operation:  $\geq 50,000$  times
10. Operating temperature:  $-10^\circ\text{C} \sim +60^\circ\text{C}$
11. Storage temperature:  $-20^\circ\text{C} \sim +70^\circ\text{C}$
12. X: 100-350Ω; 300-900Ω.
13. Unmarked tolerance:  $\pm 0.2\text{mm}$
14. Meet ROHS environmental requirements

SCALE: 1 : 1  
NOT TO SCALE

PAGE: 1 OF 1

Reshine Display (HK) Technology Co., Limited

Tel: 0755-29190292 Fax: 0755-29190291

GENERAL TOL.	UNITS	DATE	MODEL NUMBER :	CUSTOMER P/N :
0.20mm	MM		RXA-035043-02	
APPROVALS	DATE		PROJECTION	DATE:
APP Mychan	2018-06-02			2018-06-02
CHK Amor11	2018-06-02			
DWN Amor11	2018-06-02			