



REV.	DESCRIPTION	DATE



Front view

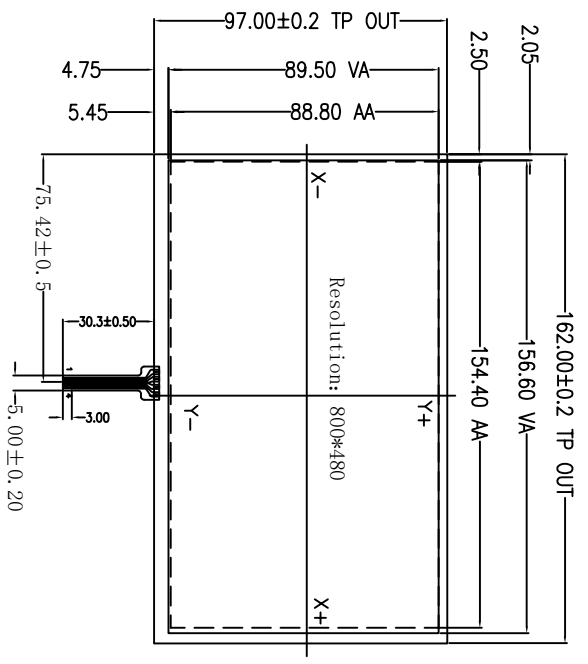

Side view

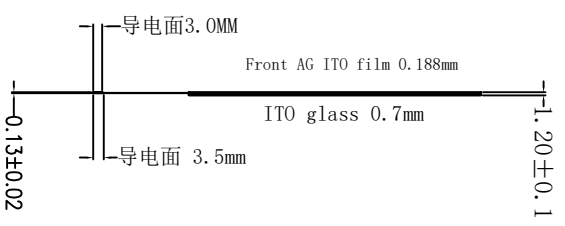

Back view

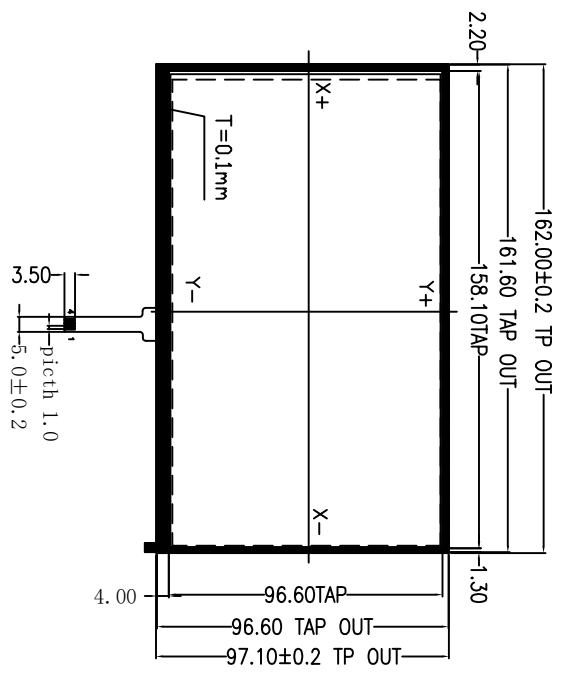

Logic diagram

- Technical parameters:
1. Structure: films+glass+PPC(Matte anti-scratch)
 2. ITO Film type: Anti-glare and anti-newton ring coating
 3. Circuit level: DC5V 1mA
 4. Surface hardness: $\leq 3H$
 5. Linear: $\leq 1.5\%$
 6. Transparent rate: $\geq 78\%$
 7. Operating pressure: 50-120g
 8. Operational life span: $\geq 1,000,000$ times
 9. Operating temperature: $-20^{\circ}\text{C} \sim +70^{\circ}\text{C}$
 10. Storage temperature: $-30^{\circ}\text{C} \sim +80^{\circ}\text{C}$
 11. Unmarked tolerance: $\pm 0.5\text{mm}$
 12. X:200-900 Ω Y:200-900 Ω
 13. Meet ROHS environmental requirements

PIN	OUT
1	X-
2	Y-
3	X+
4	Y+

SCALE: 1 : 1 NOT TO SCALE		SCALE: 1 : 1 NOT TO SCALE	
PAGE: 1 OF 1		PAGE: 1 OF 1	
GENERAL TOL. 0.30mm	APPROVALS	DATE	INITIALS
APP: WYchan	CHK: Amor11	2014/03/10	2014/03/10
		Tel: 0755-29190292 Fax: 0755-29190291	
MODEL NUMBER : RXA-070001-01		Product NO : RX-SJ-1403-01A	
		DATE: 2014/03/10	