



| REV. | DESCRIPTION | DATE |
|------|-------------|------|
|      |             |      |


Front View

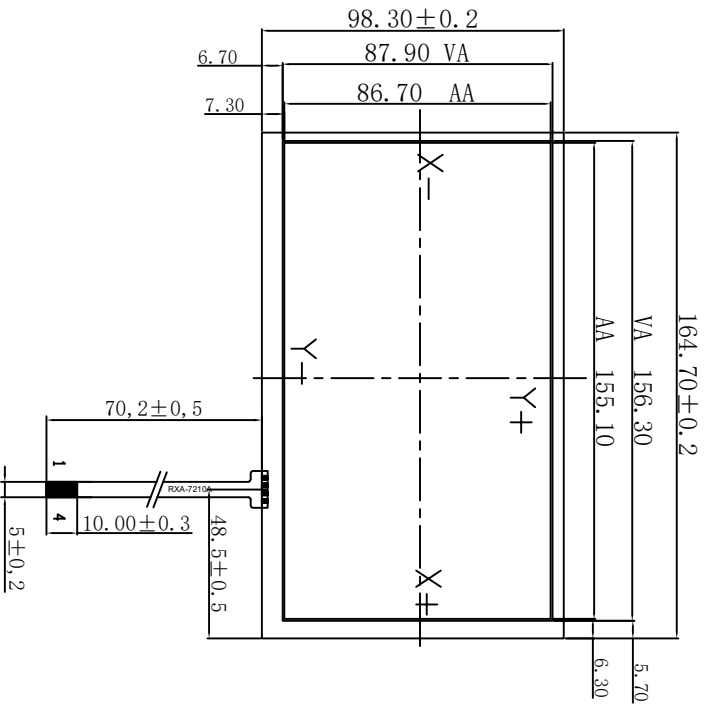

Side view

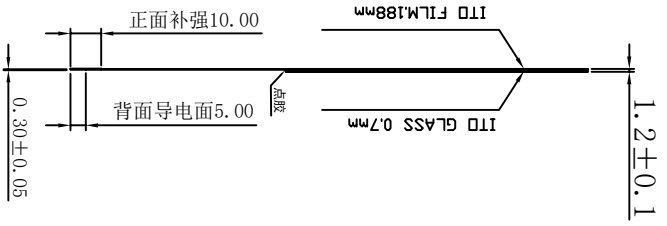


Back view

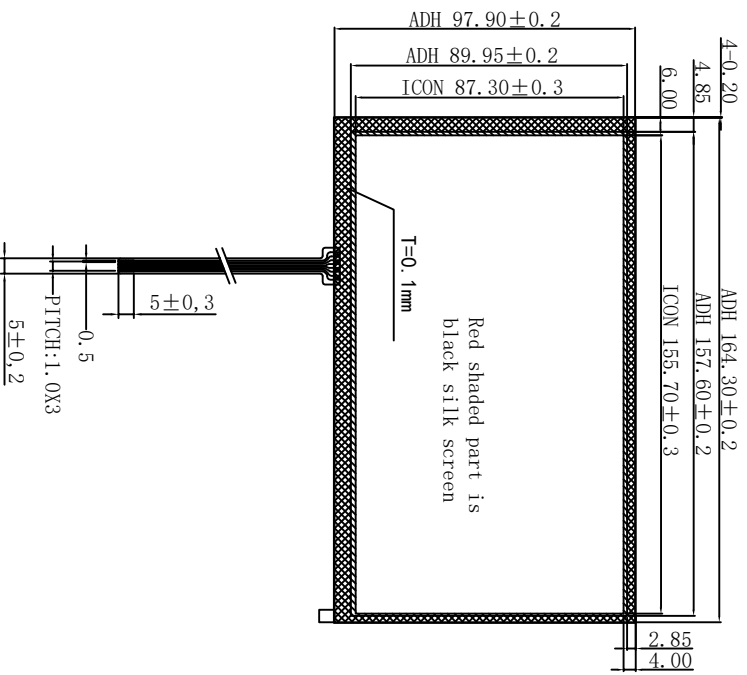

Technical parameters:

1. Structure: film+glass+FPC (Matte anti-scratch)
2. ITO Film type: Anti-glare and anti-newton ring coating
3. Circuit level: DC5V 1mA
4. Surface hardness:  $\leq 3H$
5. Linear:  $\leq 1.5\%$
6. Transparent rate:  $\geq 78\%$
7. Operating pressure: 50-120g
8. Operational life span:  $\geq 1,000,000$  times
9. Operating temperature:  $-20^{\circ}\text{C} \sim +70^{\circ}\text{C}$
10. Storage temperature:  $-30^{\circ}\text{C} \sim +80^{\circ}\text{C}$
11. Unmarked tolerance:  $\pm 0.5\text{mm}$
12. X: 150-900  $\Omega$  Y: 150-900  $\Omega$
13. Meet ROHS environmental requirements



Logic diagram

| PIN | OUT | SCALE: 1:1<br>NOT TO SCALE  |
|-----|-----|---|
| 1   | X-  | PAGE: 1 OF 1<br>GENERAL TOL.<br>0.50mm<br>APPROVALS<br>APP: WYchan<br>CHK: Amor11<br>DATE: 2014/04/28 |
| 2   | Y-  |   |
| 3   | X+  |   |
| 4   | Y+  |   |



Reshine Display (HK) Technology Co., Limited

Tel: 0755-29190292 Fax: 0755-29190291

MODEL NUMBER: RXA-070017-02



DATE: 2014/04/28