



M/1	First Version	2015-08-14
-----	---------------	------------


Front view

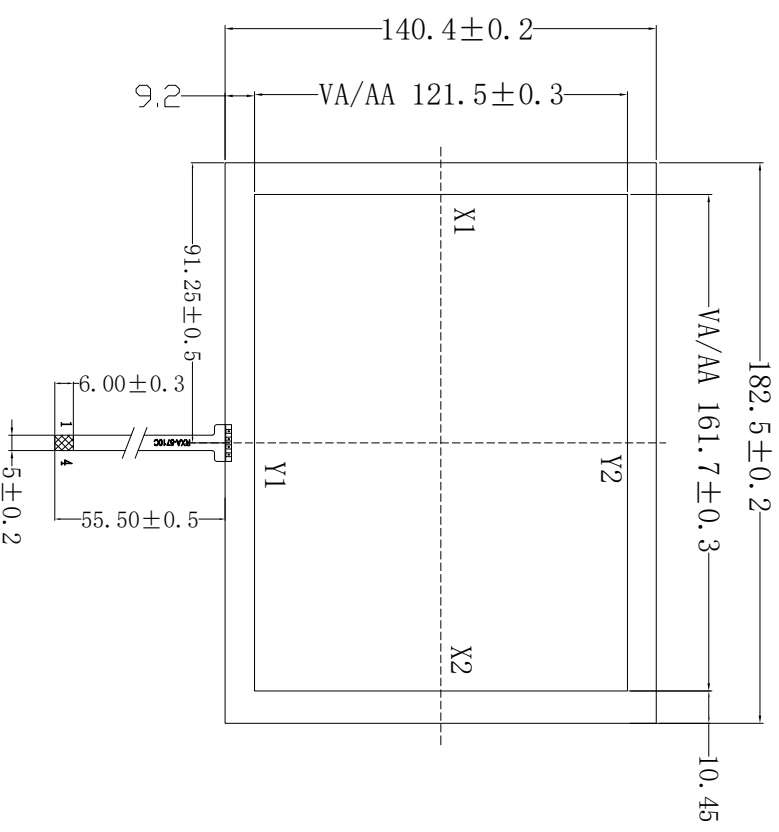

Side view

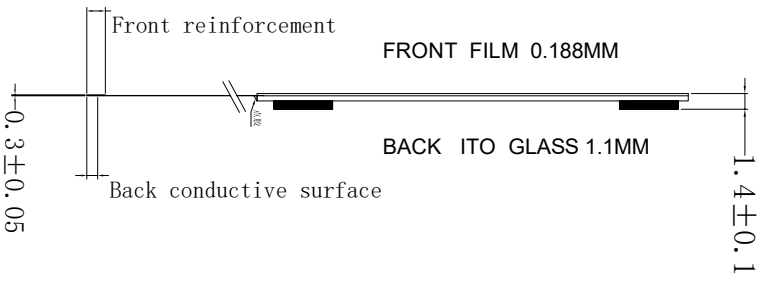


Back view

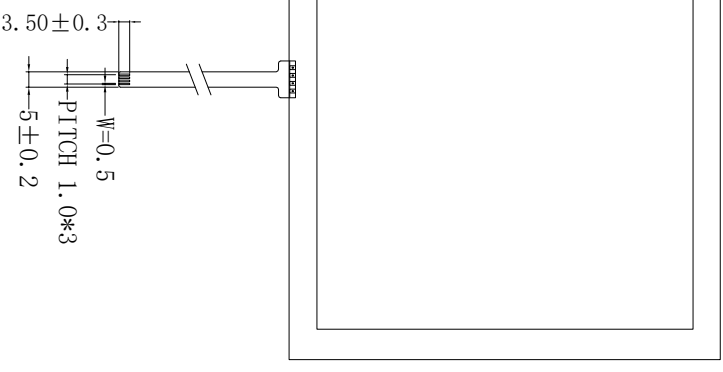

Technical parameters:

1. Structure: film+glass+FPC
2. Total thickness: 1.4 ± 0.15mm
3. Circuit level: DC5V 1mA
4. Insulation resistance: ≥ 20M Ω (25V DC)
5. Linear: ≤ 1.5%
6. Transparent rate: ≥ 78%
7. Operating pressure: 50-120g
8. Operational life spa: ≥ 1,000,000 times
9. Life span with pen operation: ≥ 100,000 times
10. Operating temperature: -10°C~+60°C
11. Storage temperature: -20°C~+70°C
12. X: 200-900 Ω Y: 200-900 Ω
13. Unmarked tolerance: ± 0.5mm
14. Meet ROHS environmental requirements



PIN	OUT
1	X1
2	Y1
3	X2
4	Y2

Logic diagram

Reshine Display Co., Limited

SCALE: 1:1 NOT TO SCALE		UNITS MM		Reshine Display (HK) Technology Co., Limited	
PAGE: 1 OF 1		DATE		Tel: 0755-29190292 Fax: 0755-29190291	
GENERAL TOL. 0.50mm		APPROVALS		MODEL NUMBER: RXA-080_E	
APP: MWchan		DATE		Product NO:	
CHK: Amor11		DATE		DATE: 2015/01/10	
Amor11		DATE		DATE: 2015/01/10	