

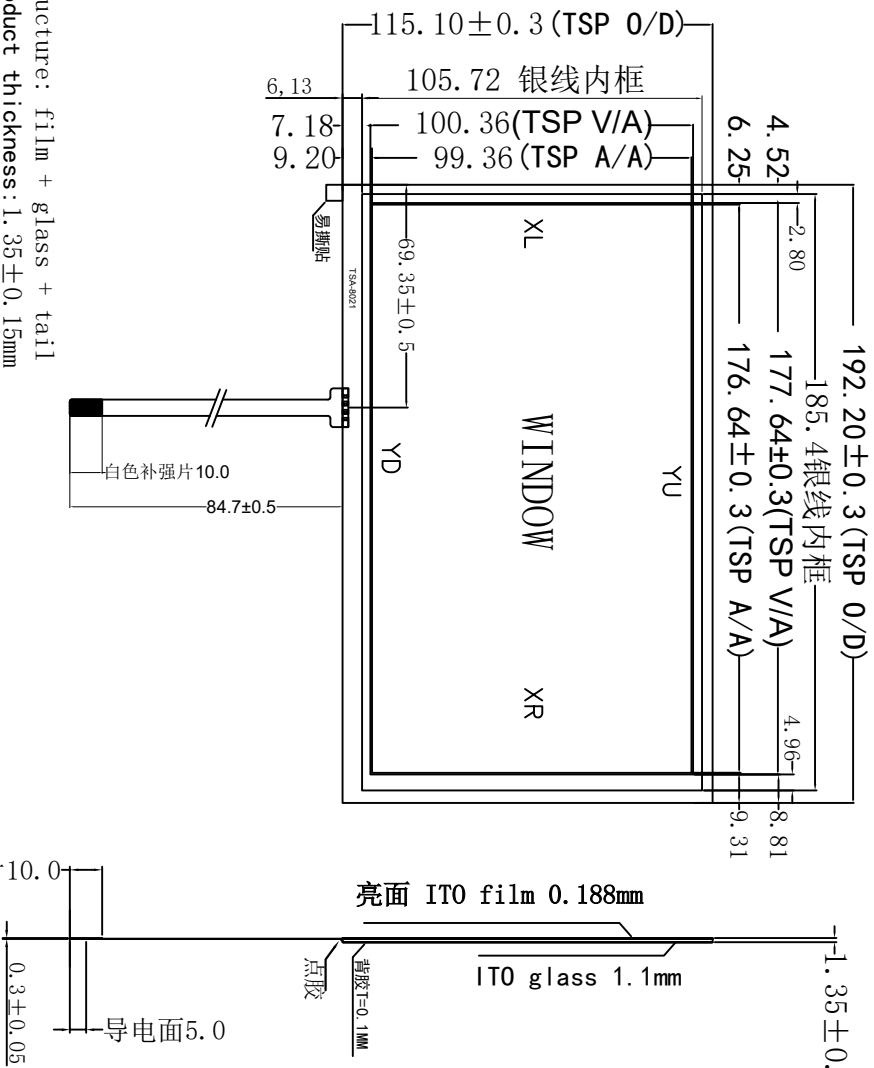


SIDE VIEW




REV.	DESCRIPTION	DATE

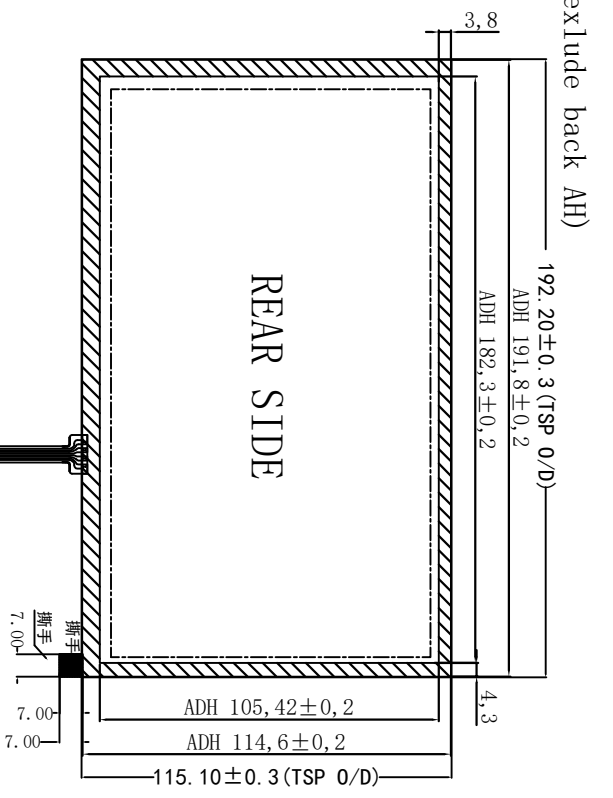

- NOTE:
1. Structure: film + glass + tail
 2. Surface hardness: $\geq 3H$
 3. Linearity: $\leq 1.5\%$
 4. Light Transmission: $\geq 80\%$
 5. Chattering: ≤ 10 msec
 6. Insulation resistance: $\leq DC 25V 20M_{\Omega}$
 7. Load upon operation: $\leq 100G$
 8. Hitting Durability: Hit $\geq 1,000,000$ times
 9. Sliding Durability: Shuttle $\geq 100,000$ times
 10. Operation TEMP: $-20^{\circ}\sim+60^{\circ}C$, $\leq 90\%RH$
 11. Storage TEMP: $-30^{\circ}\sim+70^{\circ}C$, $\leq 90\%RH$
 12. X: 100-1200Ω; 100-1200Ω.
 13. Scale: 1:1
 14. FPC Tail: Ni $2^5\mu m$ / Au $0.05^0.15\mu m$
 15. No note tolerances according to: + / - 0.3 mm.

Product thickness: 1.35±0.15mm
 ITO glass: 500Ω/□ 1.1mm
 ITO Film: 0.188mm (bright anti-scratch)



Logic diagram

PIN	OUT
1	XL
2	YD
3	XR
4	YU

SCALE: 1:1 NOT TO SCALE		UNIT'S MM	
PAGE: 1 OF 1		DATE	
GENERAL TOL. 0.30mm		DATE	
APPROVALS	DATE	MODEL NUMBER :	
APP: MYchan	2017-07-21	RXA-080021-02	
CHK: Amor11	2017-07-21	DATE:	
CHK: Amor11	2017-07-21	2017-07-21	

Reshtne Display (HK) Technology Co., Limited
 Tel: 0755-29190292 Fax: 0755-29190291

Product NO :