
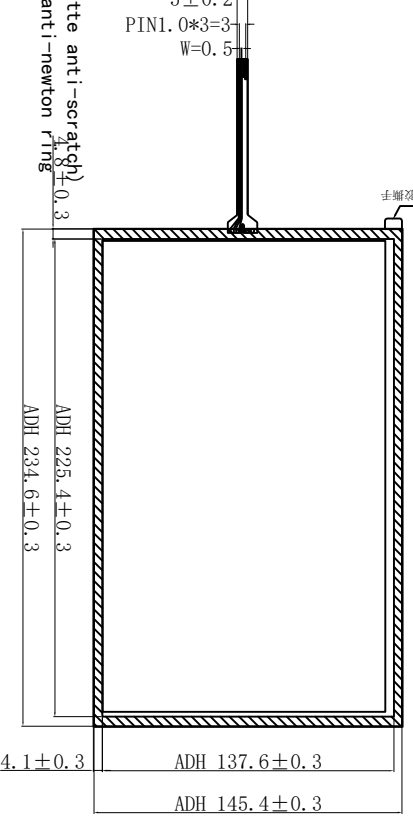
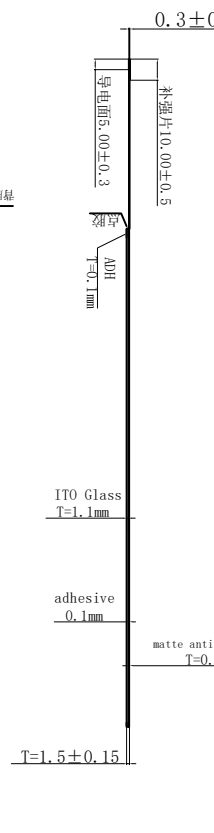


REV.	DESCRIPTION	DATE
A/0	First version	2018-01-12

2	3	4	5	6	7	8
1	XR					
2	XL					
3	YU					
4	YD					

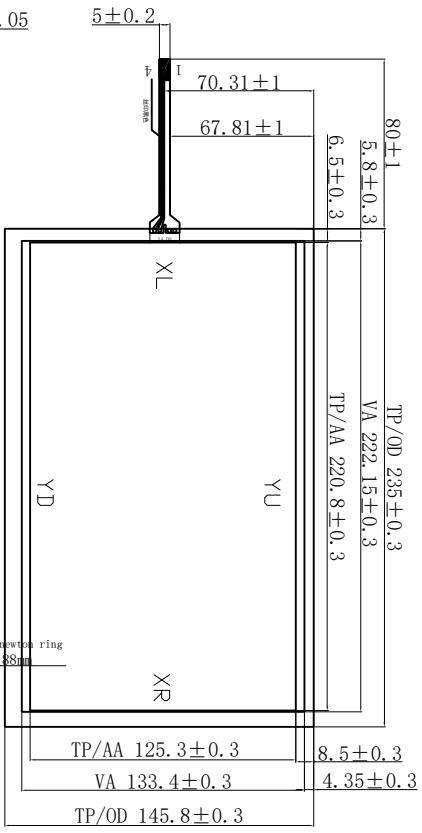

Technical parameters:
 1. Structure: films+glass+PC (Matte anti-scratch)
 ITO Film type1: Anti-glare and anti-newton ring coating
 2. Circuit level: DC5V 1mA
 3. Insulation resistance: ≥20MΩ (25V DC)
 4. Linear: ≤1.5%
 5. Transparent rate: ≥78%
 6. Operating pressure: 50-150g
 7. Operational life spa: ≥1,000,000 times
 8. Life span with pen operation: 50,000 times
 9. Operating temperature: -20°C~+70°C
 10. Storage temperature: -30°C~+80°C
 11. X: 300-1100Ω Y: 100-500Ω
 12. Unmarked tolerance: ±0.3mm
 13. Meet ROHS environmental requirements

SCALE:	1:1	NOT TO SCALE
PAGE:	1 OF 1	
GENERAL TOL:	0.30mm	
APPROVALS:		
APP:	WYchan	2018-01-12
CHK:	Amor-11	2018-01-12
DRAWN:	Amor-11	2018-01-12
UNITS:	MM	
MODEL NUMBER:	RXA-101027-01	
DATE:		2018-01-12
Product NO.:		
Tel:	0755-29190292	Fax: 0755-29190291