



| REV. | DESCRIPTION | DATE |
|------|---------------|----------|
| 1 | First version | 2018-03- |


Front view

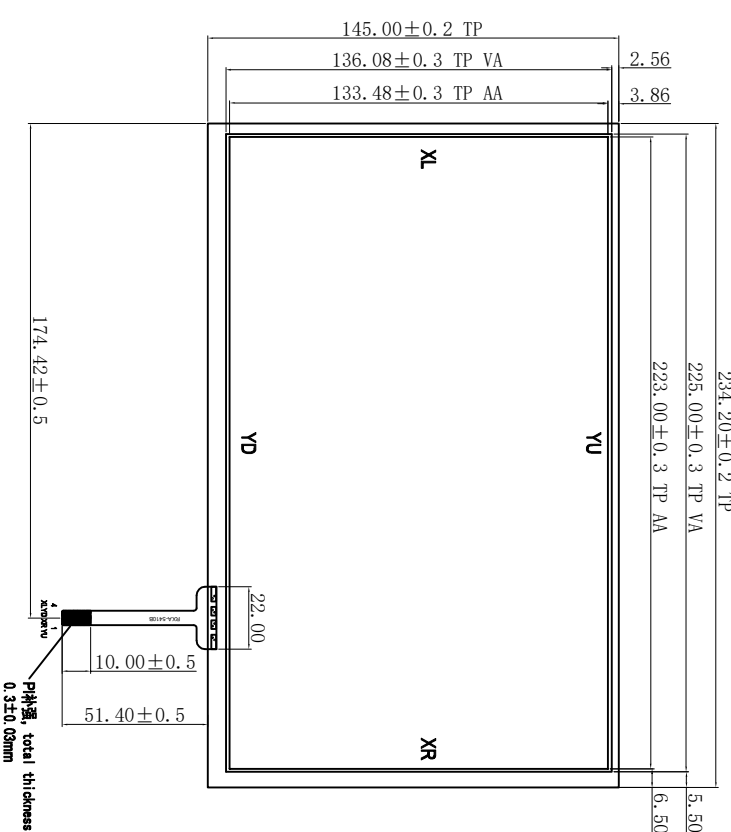

Side view

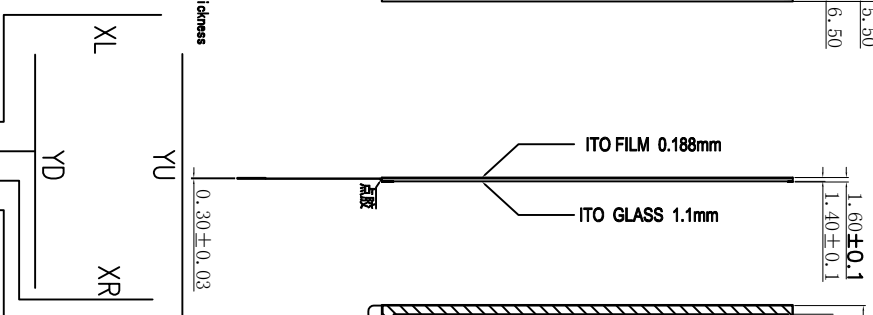

Back view

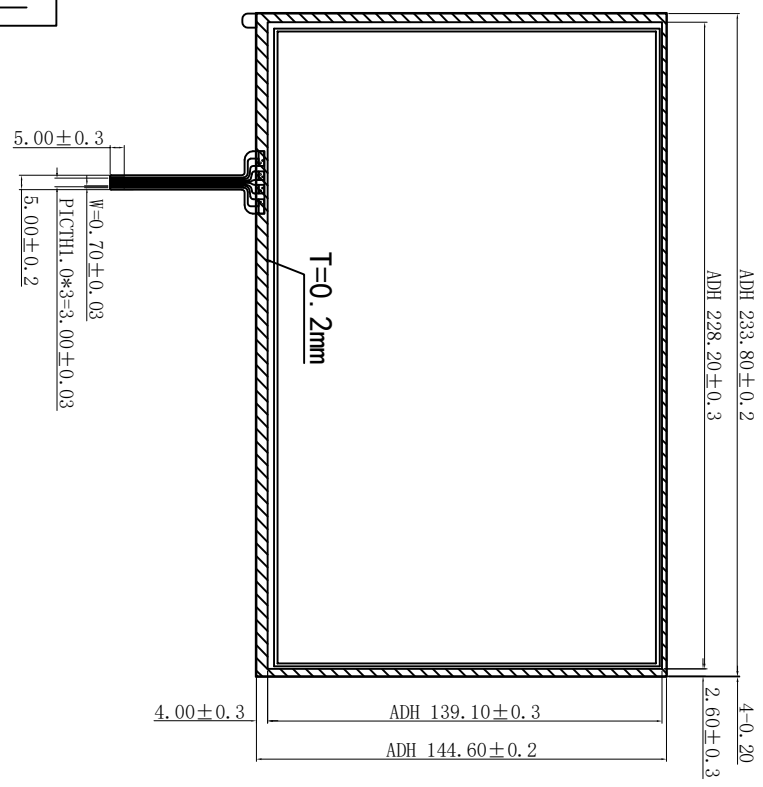

Technical parameters:

1. Structure: films+glass+PPC (Matte anti-scratch)
2. ITO Film type: Anti-glare and anti-newton ring coating
3. Circuit level: DC5V 1mA
4. Surface hardness: ≤3H
5. Linear: ≤1.5%
6. Transparent rate: ≥76%
7. Operating pressure: 50-120g
8. Operational life span: ≥35,000,000 times
9. Operating temperature: -20°C~+70°C
10. Storage temperature: -30°C~+80°C
11. Unmarked tolerance: ±0.3mm
12. X: 400-1100Ω Y: 150-500Ω
13. Meet ROHS environmental requirements

| PIN | OUT |
|-----|-----|
| 1 | YU |
| 2 | XR |
| 3 | YD |

| | |
|--|--|
| SCALE: 1:1 NOT TO SCALE | SCALE: 1:1 NOT TO SCALE |
| PAGE: 1 OF 1 | PAGE: 1 OF 1 |
| GENERAL TOL. 0.30mm | GENERAL TOL. 0.30mm |
| APPROVALS | APPROVALS |
| APP: MChan | APP: MChan |
| CHK: Amor11 | CHK: Amor11 |
| DATE: 2018-03-29 | DATE: 2018-03-29 |
| MODEL NUMBER: RXA-101028-01 | MODEL NUMBER: RXA-101028-01 |
| Reshine Display (HK) Technology Co., Limited | Reshine Display (HK) Technology Co., Limited |
| Tel: 0755-29190292 | Tel: 0755-29190292 |
| Fax: 0755-29190291 | Fax: 0755-29190291 |
| CUSTOMER P/N | CUSTOMER P/N |
| DATE: 2018-03-29 | DATE: 2018-03-29 |