



Rev	Nature of Modification	DATE
1.0	First version	2018/06/16


Front view

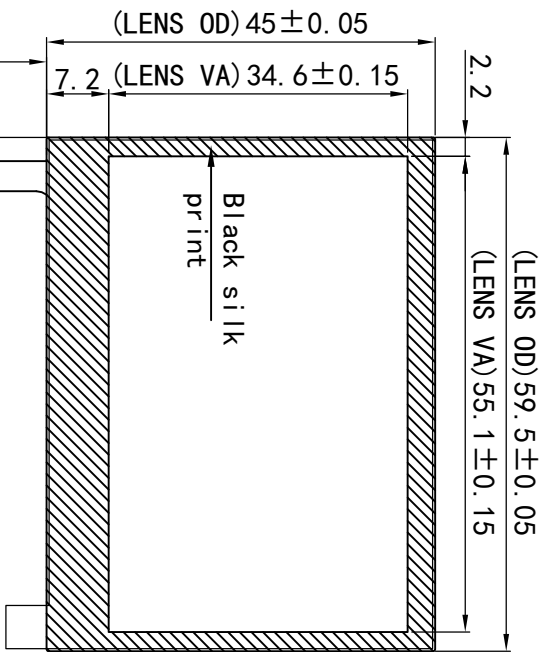

Side view

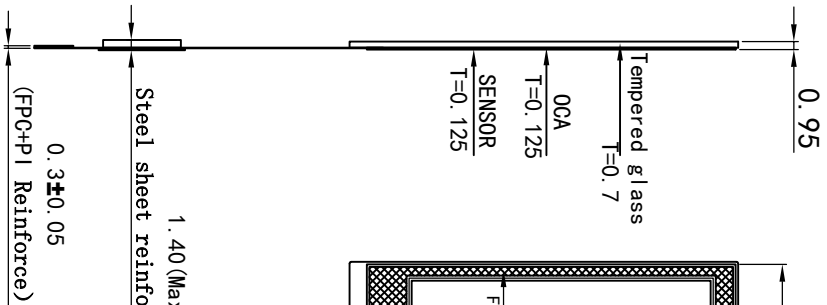

Back view

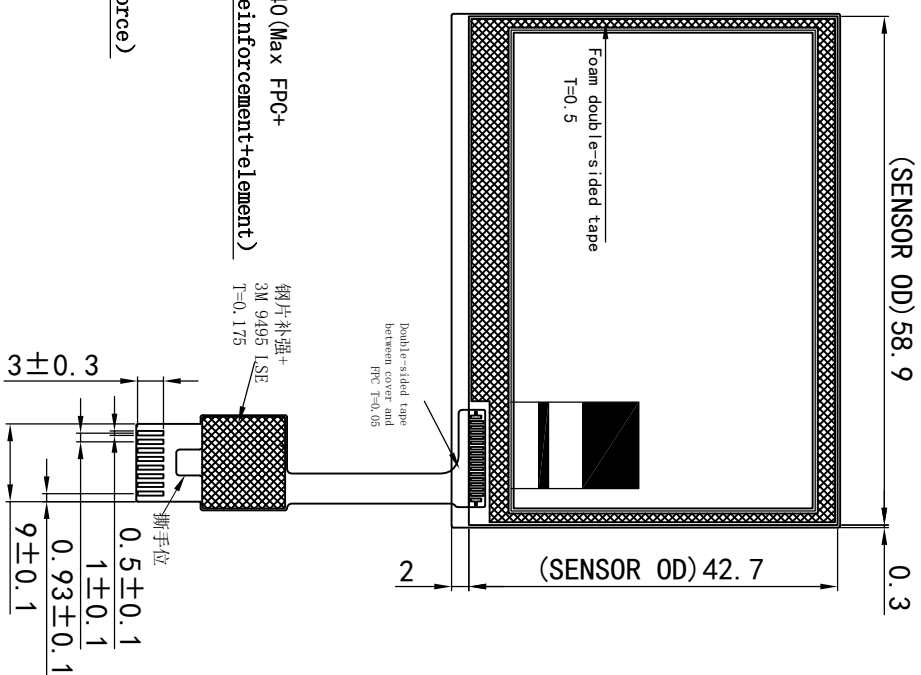

- Technical Parameters:**
1. Driver IC: FT6236U
 2. Touch panel structure: G+F
 3. Operating voltage: 2.8V-3.3 V;
 4. I2C communication voltage: 2.8V-3.3 V
 5. Transparent rate: ≥80%
 6. Surface hardness: ≥6H
 7. Operating temperature: -20°C~+70°C, ≤90%RH
 8. Storage temperature: -30°C~+80°C, ≤90%RH
 9. Unmarked tolerance: ±0.2mm
 9. Meet ROHS environmental requirements

PIN	SYMBOL
1	VCC (3.3V)
2	SCL (3.3V)
3	SDA (3.3V)
4	INT (3.3V)
5	RST (3.3V)
6	GND
7	N
8	N

SCALE: 1 : 1 NOT TO SCALE			
PAGE: 1 OF 1			
GENERAL TOL. 0.50mm	UNITS MM	MODEL NUMBER : RXG-GF025178A 工程图	
APPROVALS	DATE		
APP:		CUSTOMER NO.: DATE: 2018/06/16	
CHK:			
DWN:	YANHAI 2018-06-16		