



Rev	Nature of Modification	DATE
01	First version	2017-12-08

Front view

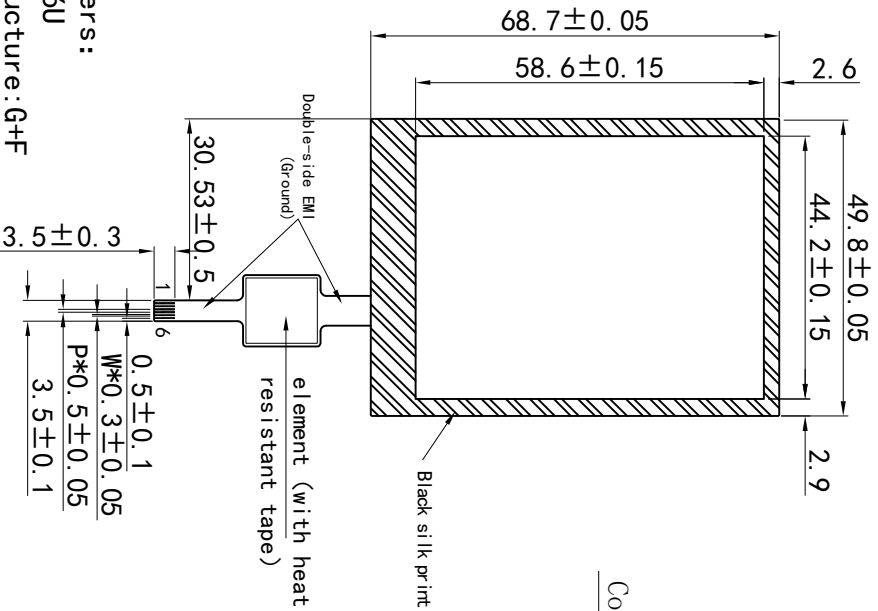

Side view

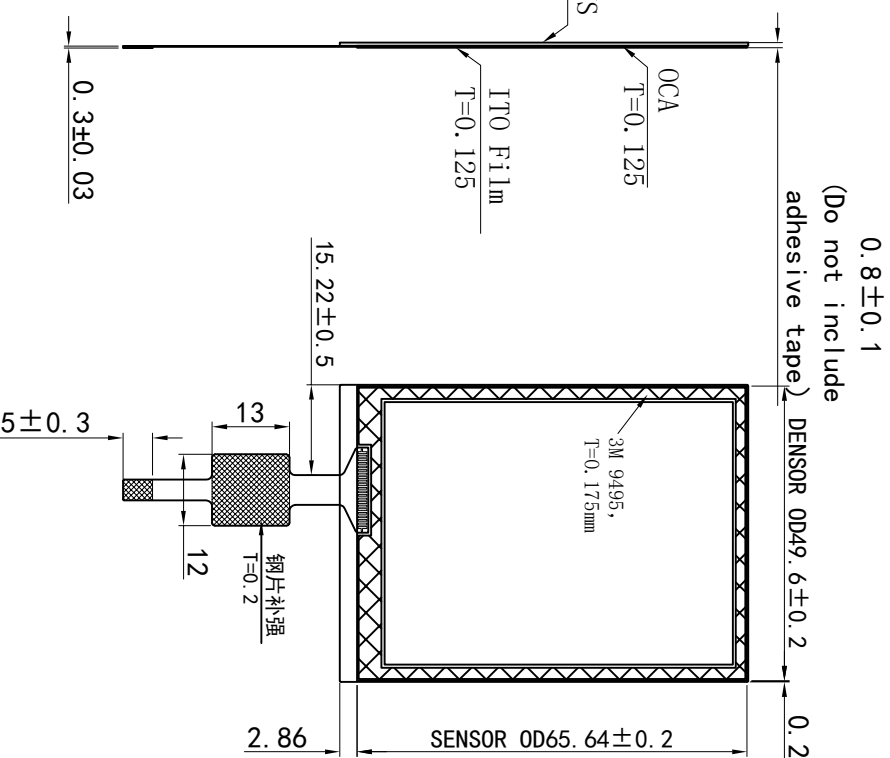

Back view

- Technical Parameters:
1. Driver IC: FT6336U
 2. Touch panel structure: G+F
 3. Operating voltage: 2.8V-3.3 V;
12G communication voltage: 2.8V-3.3 V
 4. Transparent rate: $\geq 80\%$
 5. Surface hardness: $\geq 6H$
 6. Operating temperature: $-20^{\circ}\text{C} \sim +70^{\circ}\text{C}$, $\leq 90\%RH$
 7. Storage temperature: $-30^{\circ}\text{C} \sim +80^{\circ}\text{C}$, $\leq 90\%RH$
 8. Unmarked tolerance: $\pm 0.2\text{mm}$
 9. Meet ROHS environmental requirements

PIN	Definition
1	GND
2	RST3.3V
3	INT3.3V
4	SDA3.3V
5	SCL3.3V
6	VCC3.3V

SCALE: 1:1 NOT TO SCALE		R X Reshine Display (HK) Technology	
PAGE: 1 OF 1		Co., Limited	
GENERAL TOL. 0.50mm		UNITS MM	
APPROVALS		DATE	
APP:		MODEL NUMBER:	
CHK:		RXG-GF028126A-1.0	
DWN:		DATE:	
MHY		2017-12-08	