




# Front view

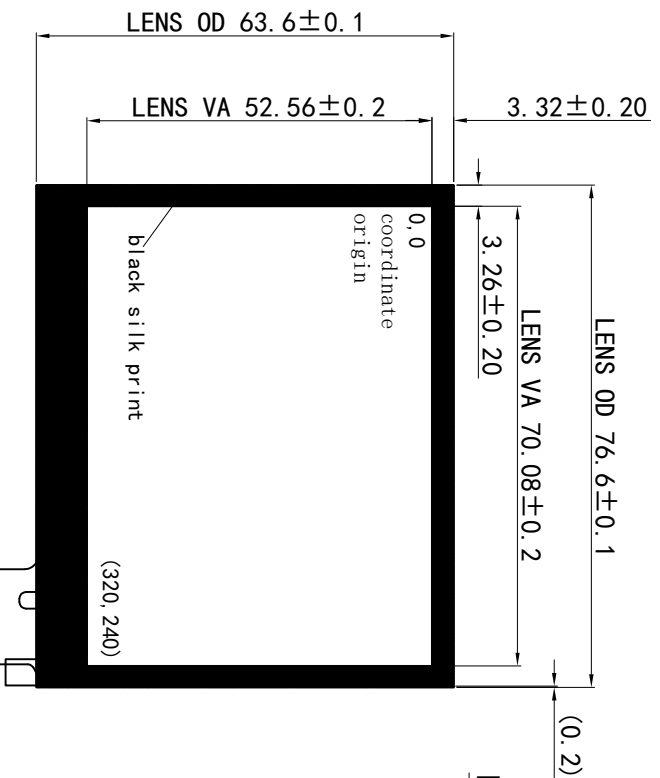

# Side view

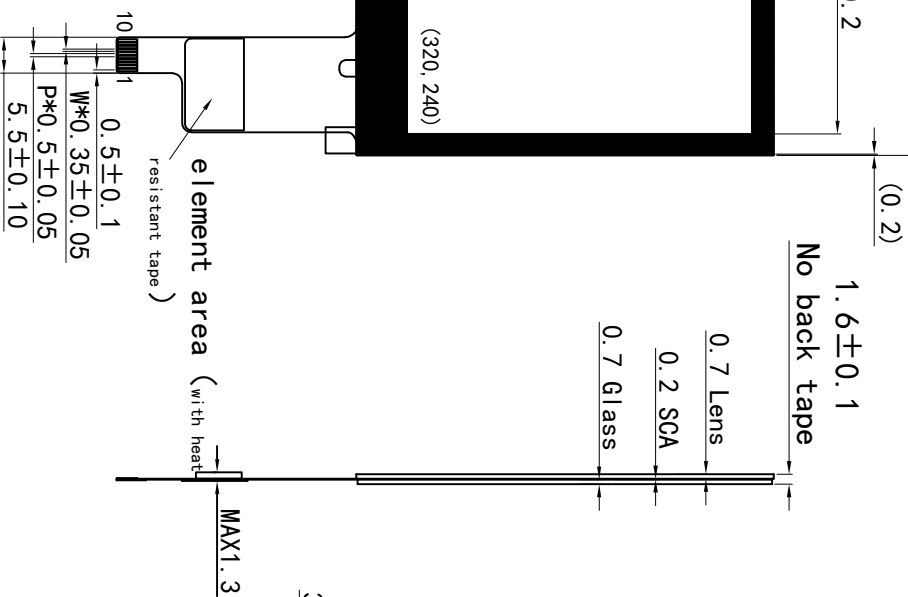

# Back view

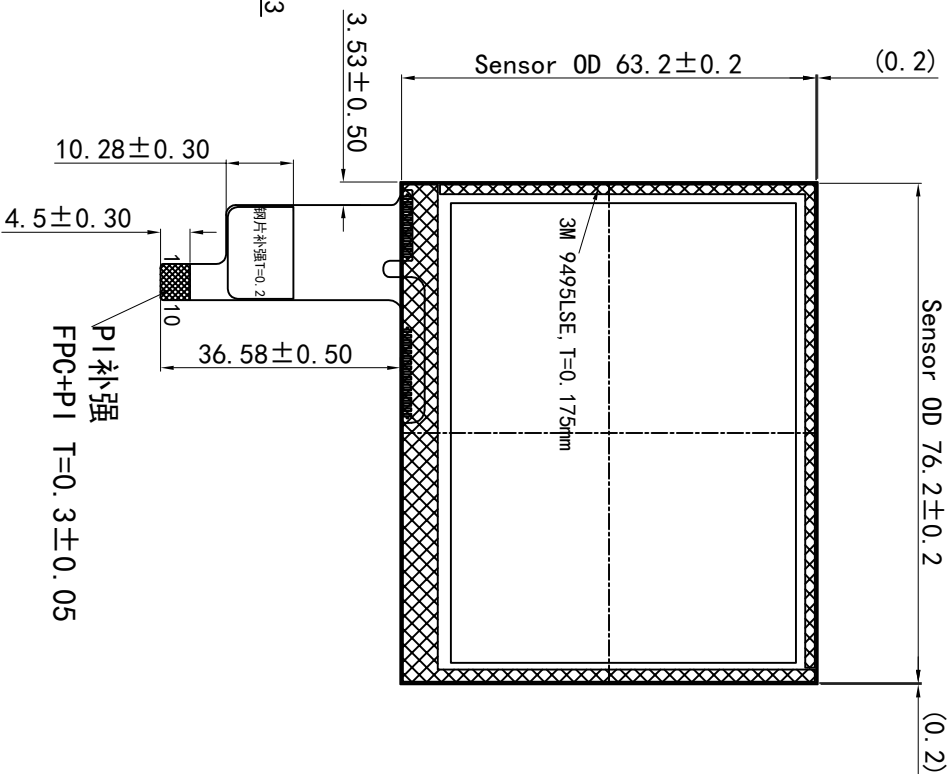

1. please add pull-resistors on main board SCA, SDA
  2. Do not add pull-resistors and capacitors to the INT on the motherboard.
  3. Do not send OF6 firmware in the driver.
- Technical Parameters:
1. Driver IC: GT911
  2. Structure: Glass+Glass
  3. Operating voltage: 2.8V-3.3 V;
  4. I2C communication voltage: 2.8V-3.3 V
  5. Transparent rate:  $\geq 80\%$
  6. Surface hardness:  $\geq 6H$
  7. Operating temperature:  $-20^{\circ}\text{C} \sim +70^{\circ}\text{C}$ ,  $\leq 90\%RH$
  8. Storage temperature:  $-30^{\circ}\text{C} \sim +80^{\circ}\text{C}$ ,  $\leq 90\%RH$
  9. Unmarked tolerance:  $\pm 0.2\text{mm}$
  9. Meet ROHS environmental requirements

PIN	Definition
1	VSS
2	VDD
3	SCL
4	VSS
5	SDA
6	VSS
7	/RST
8	NC
9	INT
10	VSS

SCALE: 1:1 NOT TO SCALE		R X Reshine Display (HK) Technology Co., Limited	
PAGE: 1 OF 1		Tel: 0755-29190292 Fax: 0755-29190291	
GENERAL TOL. 0.50mm		UNITS mm	
APPROVALS		DATE	
APP:		MODEL NUMBER:	
CHK:		RXC-GG03501F-1.0	
DMN:		DATE:	
LY		2019-03-18	

Rev	Nature of Modification	DATE
1.0	First version	2019/03/18