
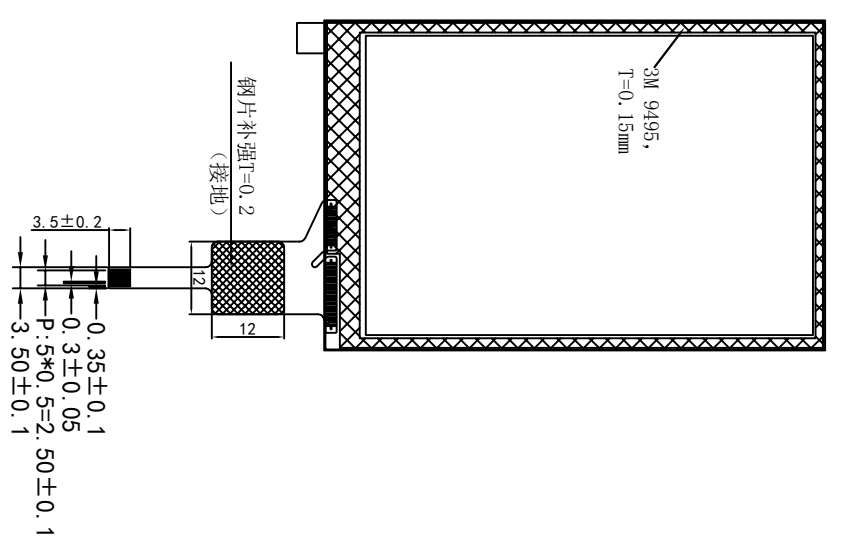
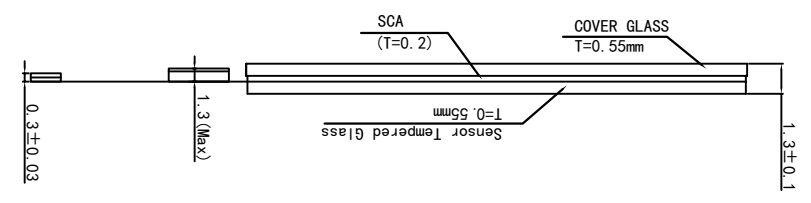


Rev	Nature of Modification	DATE
01	First version	2017/07/26

Front view Side view Back view

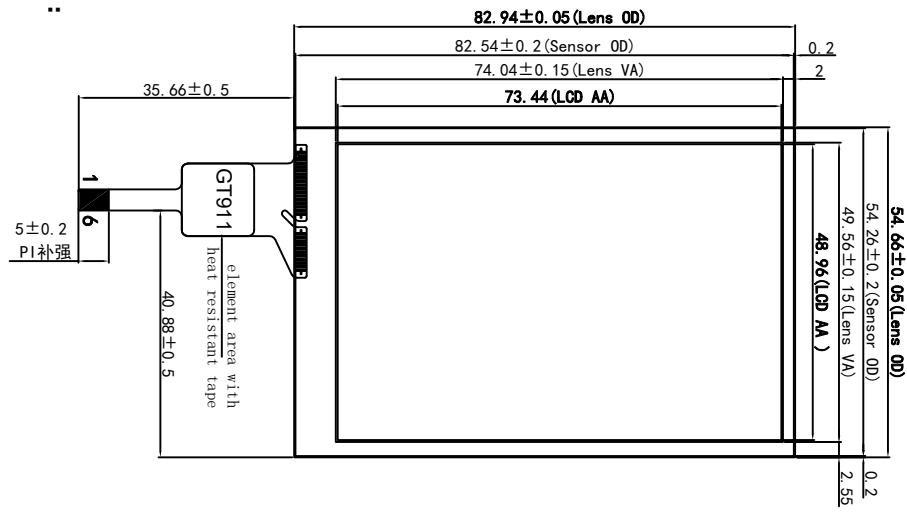

Technical Parameters:

1. Driver IC: GT911
2. Structure: Glass+Glass
3. Operating voltage: 2.8V-3.3 V;
4. Transparent rate:  $\geq 80\%$
5. Surface hardness:  $\geq 6H$
6. Operating temperature:  $-20^{\circ}\text{C}\sim+70^{\circ}\text{C}$ ,  $\leq 90\%\text{RH}$
7. Storage temperature:  $-30^{\circ}\text{C}\sim+80^{\circ}\text{C}$ ,  $\leq 90\%\text{RH}$
8. Unmarked tolerance:  $\pm 0.2\text{mm}$
9. Meet ROHS environmental requirements

PIN Logical definition

PIN#	Name
1	RST
2	INT
3	SDA
4	SCL
5	GND
6	VDD

SCALE: 1 : 1 NOT TO SCALE		<p>Reshine Display (HK) Technology Co., Limited</p>	
PAGE: 1 OF 1			
GENERAL TOL. 0.50mm	UNITS MM	Tel: 0755-23063683	Fax: 0755-23592853
APPROVALS	DATE	MODEL NUMBER :	CUSTOMER NO.:
APP:		RXG-6G035081A-1.0	
CHK:			DATE: 2017-07-26
DWN:	yanhai	2017-07-26	