



Rev	Nature of Modification	DATE
1.0	First version	2019/2/26


Front view

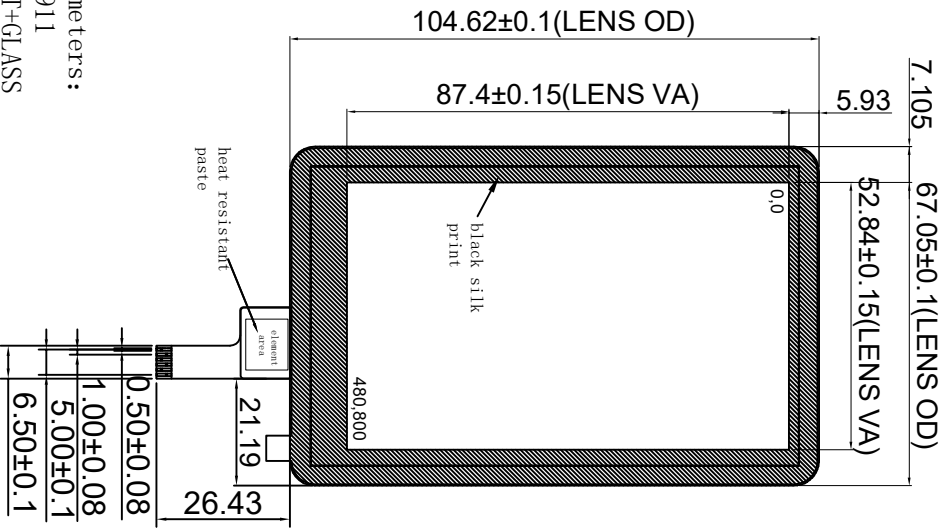

Side view

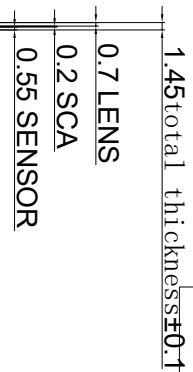

Back view

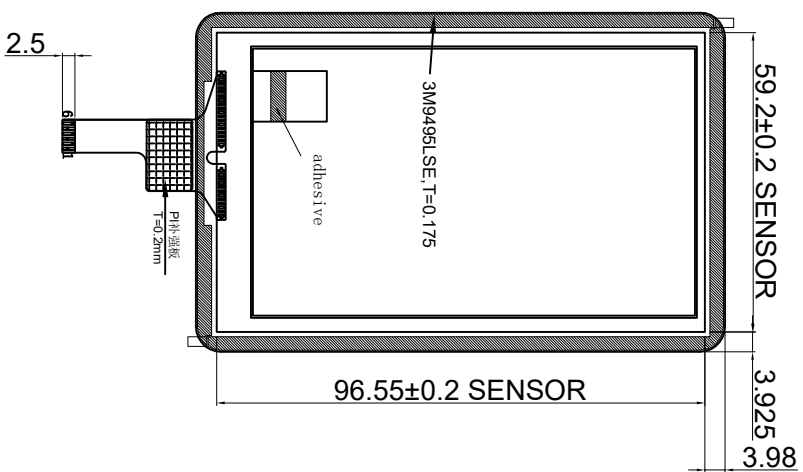

0.50±0.08
1.00±0.08
5.00±0.1
6.50±0.1

- Technical Parameters:
1. Driver IC: GT911
 2. Structure: PET+GLASS
 3. Operating voltage: 2.8V~3.3 V;
I2C communication voltage: 2.8V~3.3 V
 4. Transparent rate: $\geq 85\%$
 5. Surface hardness: $\geq 6H$
 6. Operating temperature: $-20^{\circ}\text{C} \sim +70^{\circ}\text{C}$, $\leq 90\%RH$
 7. Storage temperature: $-30^{\circ}\text{C} \sim +80^{\circ}\text{C}$, $\leq 90\%RH$
 8. Unmarked tolerance: $\pm 0.2\text{mm}$
 9. Meet ROHS environmental requirements

PIN	Definition
1	GND
2	VCC
3	SDA (1.8)
4	SCL (1.8)
5	INT
6	RESET

SCALE: 1:1 NOT TO SCALE		R X Reshine Display (HK) Technology Co., Limited	
PAGE: 1 OF 1		Tel: 0755-23063683 Fax: 0755-23592851	
GENERAL TOL: 0.50mm		UNITS: MM	
APPROVALS:		DATE:	
APP:	yanhai	2019-2-26	
CHK:	LY	2019-2-26	
DWN:			
MODEL NUMBER: RXG-66040230A-1.0		CUSTOMER NO.:	
		DATE:	