
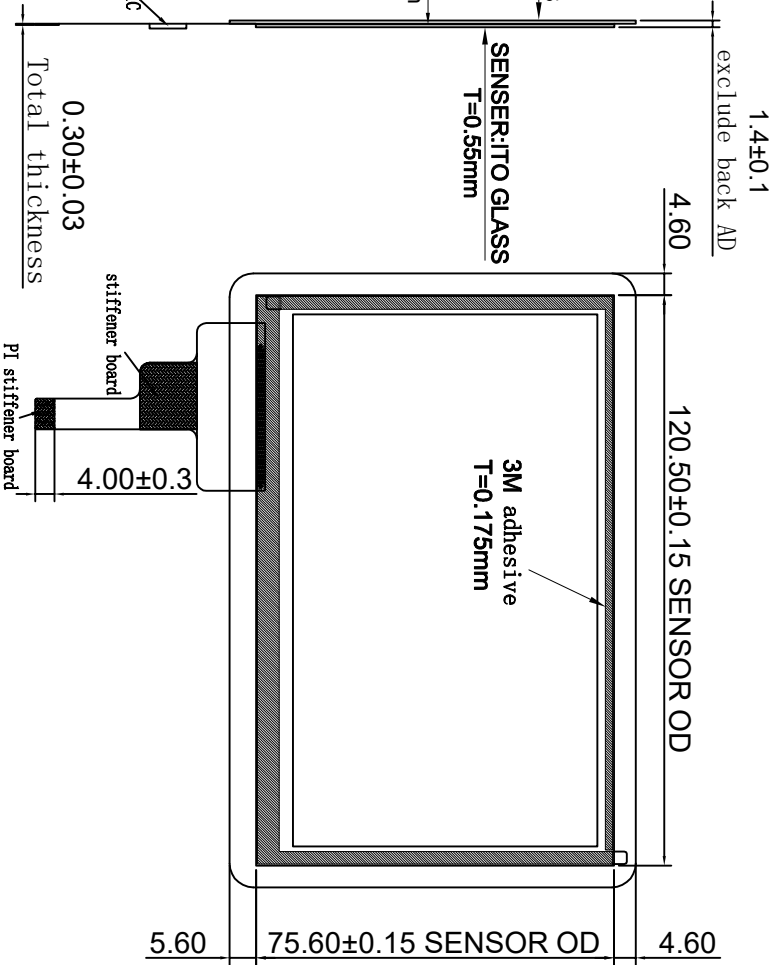


Rev	Nature of Madification	DATE
1.0	First version	2017/06/01

Front view

Side view

Back view

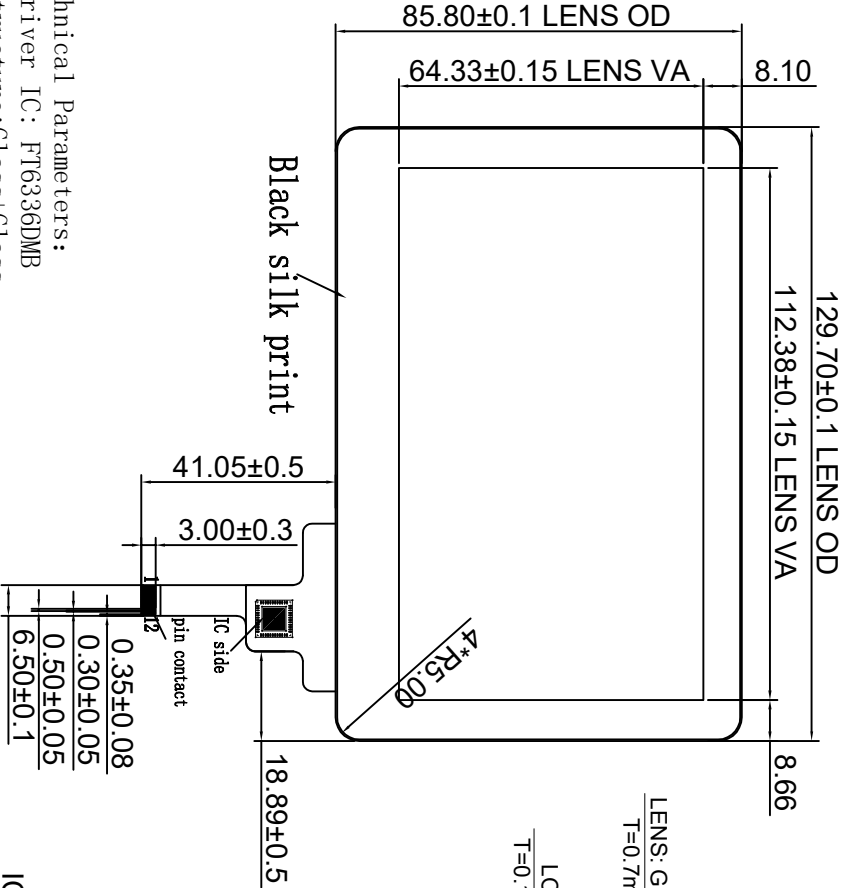

IC:FT6336DMB

PIN	Definition
1	GND
2	NC
3	NC
4	NC
5	NC
6	GND
7	SDA
8	SCL
9	RESET
10	INT
11	VDD/3.3V
12	VDD/3.3V

- Technical Parameters:
1. Driver IC: FT6336DMB
 2. Structure: Glass+Glass
 3. Operating voltage: 2.8V~3.3 V;
I2C communication voltage: 2.8V~3.3 V
 4. Transparent rate: $\geq 82\%$
 5. Surface hardness: $\geq 6H$
 6. Operating temperature: $-20^{\circ}\text{C} \sim +70^{\circ}\text{C}$, $\leq 90\%RH$
 7. Storage temperature: $-30^{\circ}\text{C} \sim +80^{\circ}\text{C}$, $\leq 90\%RH$
 8. Unmarked tolerance: $\pm 0.2\text{mm}$
 9. Meet ROHS environmental requirements

SCALE: 1 : 1 NOT TO SCALE		 Resnine Display (HK) Technology Co., Limited		
PAGE: 1 OF 1				
GENERAL TOL. 0.50mm	UNITS MM			
APPROVALS	DATE			
APP:		MODEL NUMBER :		CUSTOMER NO.:
CHK:		RXC-66050054A-1.0		
DWN:	MHY	2017-06-01	DATE: 2017-06-01	