

Rev	Nature of Modification	DATE
1.0	First version	2018-04-21

D

5



2

D

Front view

Side view

Back view

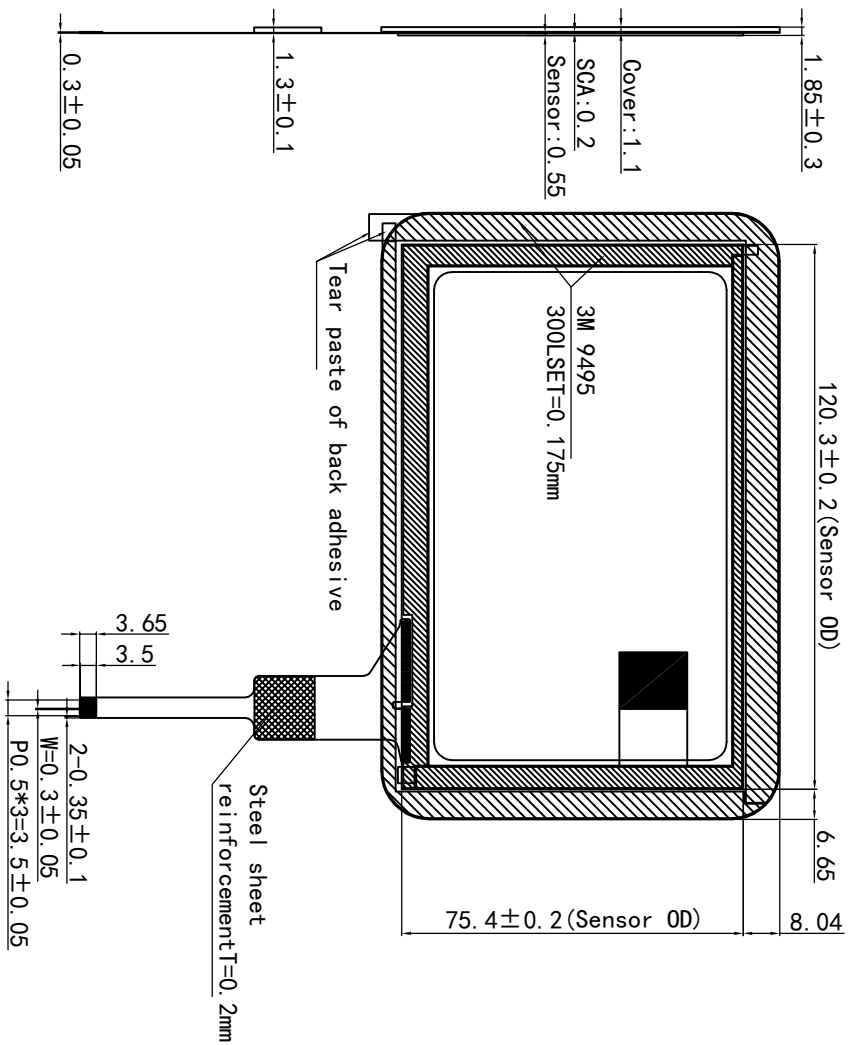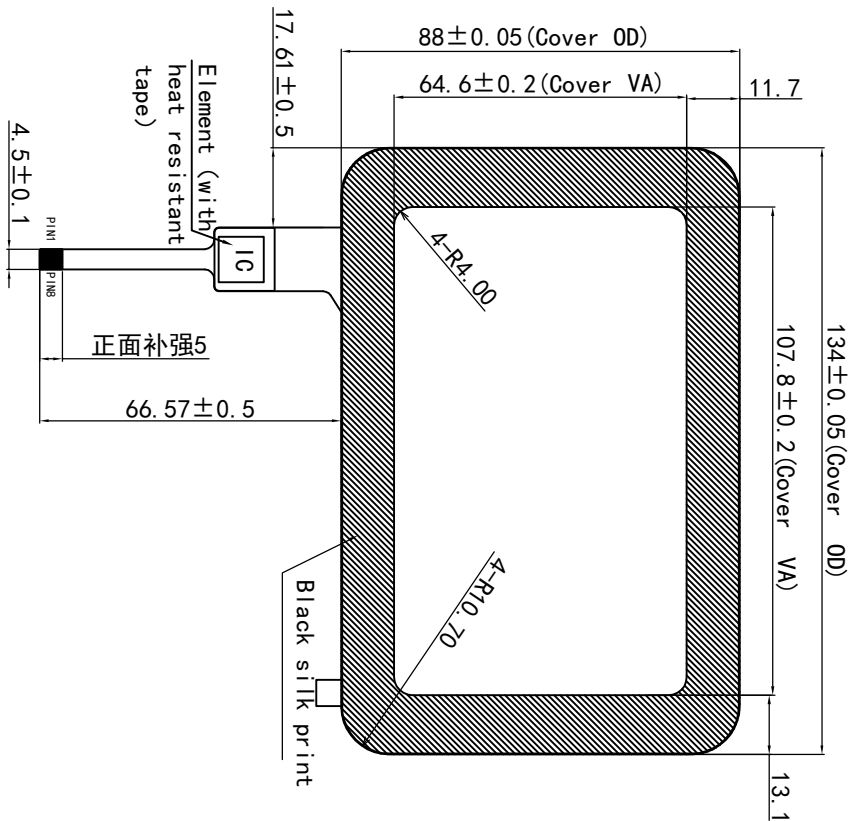

Note:

1. COVER Glass+ITO GLASS+PPC IC:GT911
2. Operating Voltage: 1.8V~3.3 V
3. Transmittance:  $\geq 85\%$
4. Hardness: 6H
5. Operating TEMP:  $-20^{\circ}\text{C}^{\sim}+70^{\circ}\text{C}$ ,  $\leq 90\%RH$
6. Storage TEMP:  $-30^{\circ}\text{C}^{\sim}+80^{\circ}\text{C}$ ,  $\leq 90\%RH$
7. General Tolerance:  $\pm 0.2\text{mm}$

A

A

1	NC	SCALE: 1:1 NOT TO SCALE		Reshine Display (HK) Technology Co., Limited Tel: 0755-29190292 Fax: 0755-29190291
2	GND	PAGE: 1 OF 1		
3	RST3.3V	GENERAL TOL. 0.20mm		
4	INT3.3V	APPROVALS	UNITS MM	DATE
5	SDA3.3V	APP:	MODEL NUMBER:	RXC-GG050158B-1.0
6	SCL3.3V	CHK:	CUSTOMER NO.:	
7	VDD3.3V	DWN:	DATE:	2018-04-21
8	VDD3.3V	MHY		