


### Front view

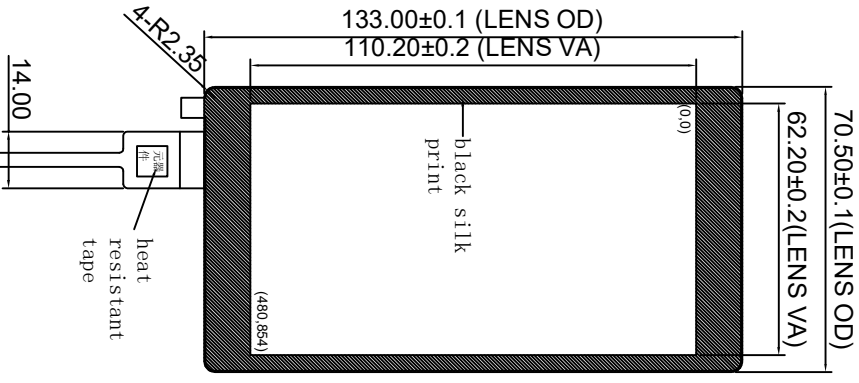


### Technical Parameters:

1. Driver IC: GT911
2. Structure: Glass+Glass
3. Operating voltage: 2.8V-3.3 V;
4. Transparent rate:  $\geq 85\%$
5. Surface hardness:  $\geq 6H$
6. Operating temperature:  $-20^{\circ}\text{C} \sim +70^{\circ}\text{C}$ ,  $\leq 90\%RH$
7. Storage temperature:  $-30^{\circ}\text{C} \sim +80^{\circ}\text{C}$ ,  $\leq 90\%RH$
8. Unmarked tolerance:  $\pm 0.2\text{mm}$
9. Meet ROHS environmental requirements


0.30±0.05
0.35±0.05
0.50±0.05
3.50±0.8

PIN	SYMBOL
1	GND
2	SCL
3	SDA
4	RST
5	INT
6	VDD

### Side view

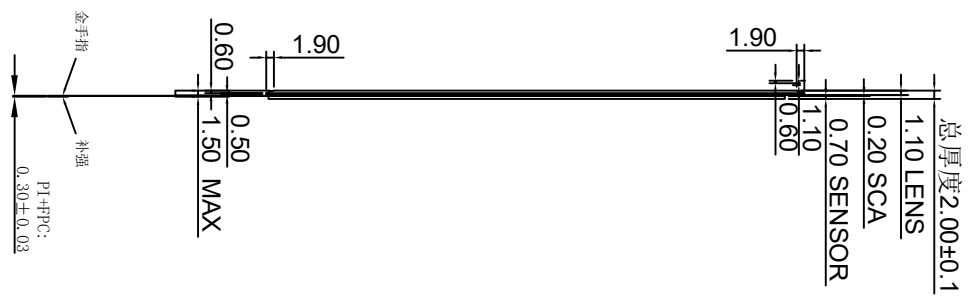

### Back view

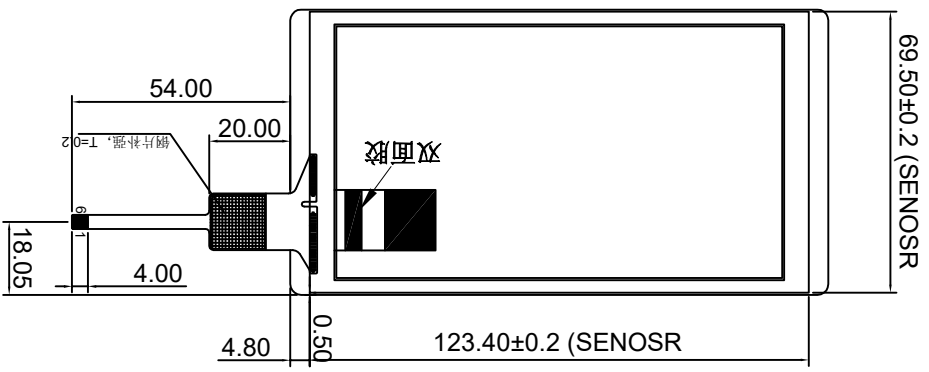

Rev	Nature of Modification	DATE
1.0	First version	2019/3/25

SCALE: 1:1  
NOT TO SCALE

PAGE: 1 OF 1

GENERAL TOL. 0.50mm

APPROVALS

APP: VANHAI

CHK: VANHAI

DWN: LY

UNITS: MM

DATE: 2019-3-25

MODEL NUMBER: RXG-66050233A-1.0

DATE: 2019-3-25

Tel: 0755-23063683 Fax: 0755-23592851

RX Reshine Display (HK) Technology Co., Limited

CUSTOMER NO.: DATE: