

8

1

3

4

Autodesk

2



1

Rev	Nature of Modification	DATE
1.0	First version	2017-09-23

### Front view

### Side view

### Back view

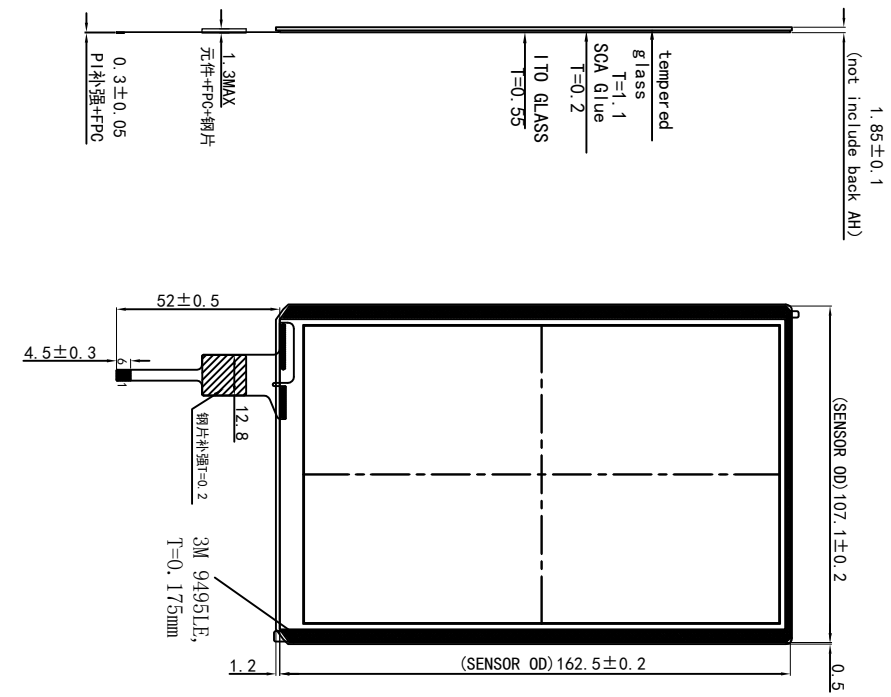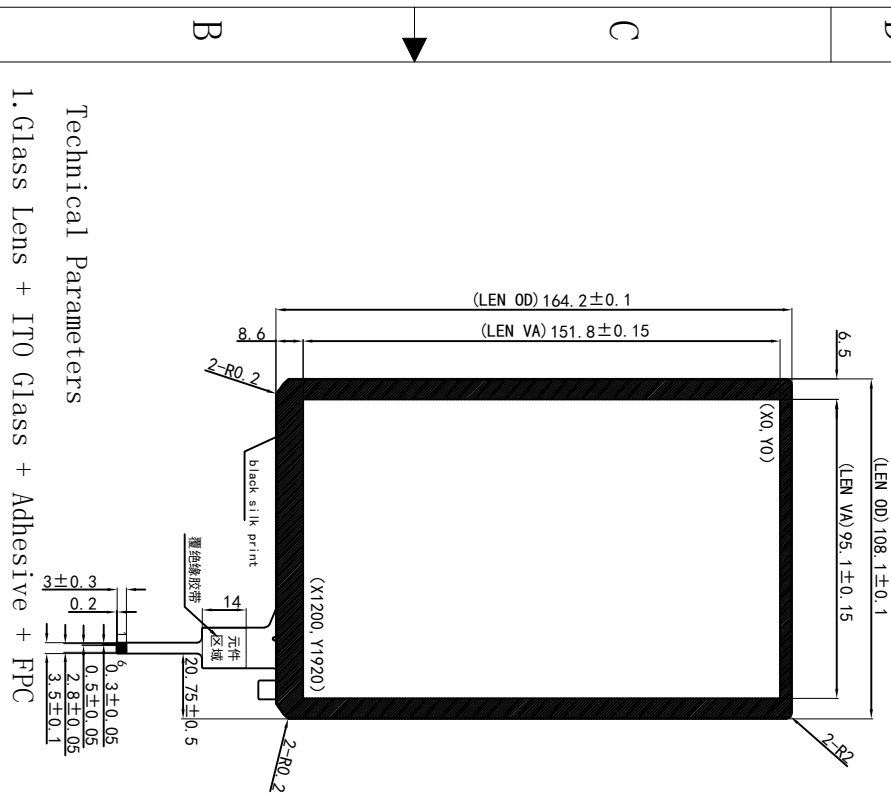

PIN#	Name
1	RST (3.3V)
2	VDD (3.3V)
3	GND
4	INT (3.3V)
5	SDA (3.3V)
6	SCL (3.3V)

#### Technical Parameters

1. Glass Lens + ITO Glass + Adhesive + FPC
2. IC: GT911
3. Operation voltage: 2.8V~3.3V
4. Transparent rate: ≥80%
5. Surface hardness: ≥6H
6. Operating temperature: -10°C~+60°C, ≤90%RH
7. Storage temperature: -20°C~+70°C, ≤90%RH
8. Unmarked tolerance: ±0.2mm.
9. Meet ROHS environmental requirements

SCALE: 1 : 1  
NOT TO SCALE

PAGE: 1 OF 1

GENERAL TOL. 0.50mm

APPROVALS

APP:

CHK:

DWN: 2017-09-23

UNITS MM

DATE

MODEL NUMBER : RXC-GG070098A-1.0

CUSTOMER NO.:

DATE: 2017-09-23

Reshine Display (HK) Technology Co., Limited

Tel: 0755-29190292 Fax: 0755-29190291

8

7

5

Autodesk

2

1