


Rev	Nature of Modification	DATE
1.0	原始版本	2018/02/01


Front view



Side view

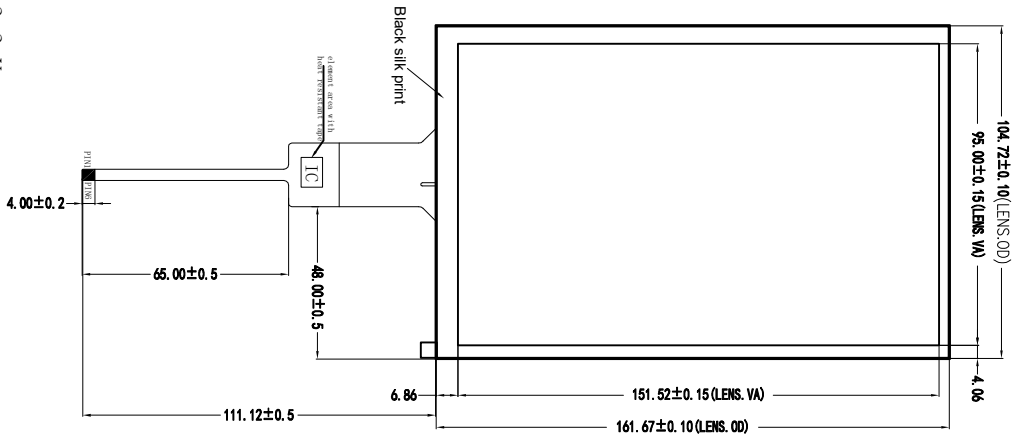

Back view

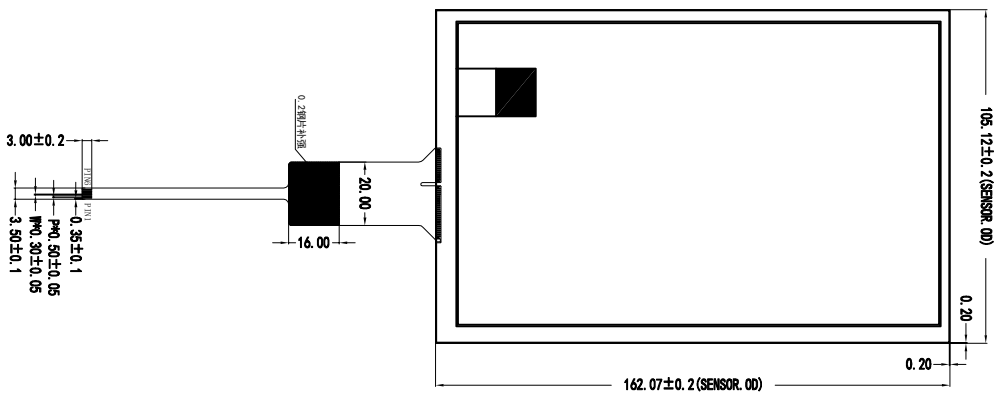

PIN	Definition
1	SCL 1.8V
2	SDA 1.8V
3	GND
4	RST
5	INT 1.8V
6	VCC 2.8V

- Technical Parameters:
1. Driver IC: GT911
  2. Structure: Glass + Glass
  3. Operating voltage: 2.8V-3.3 V;  
I2C communication voltage: 2.8V-3.3 V
  4. Transparent rate:  $\geq 86\%$
  5. Surface hardness:  $\geq 6H$
  6. Operating temperature:  $-20^{\circ}\text{C}^{\sim}+70^{\circ}\text{C}$ ,  $\leq 90\%RH$
  7. Storage temperature:  $-30^{\circ}\text{C}^{\sim}+80^{\circ}\text{C}$ ,  $\leq 90\%RH$
  8. Umarked tolerance:  $\pm 0.2\text{mm}$
  9. Meet ROHS environmental requirements

SCALE: 1:1  
NOT TO SCALE

PAGE: 1 OF 1

GENERAL. TOL. 0.50mm

APPROVALS

APP:

CHK:

DWN: 2018-02-01

**R X Reshine Display (HK) Technology Co., Limited**

Tel: 0755-29190292 Fax: 0755-29190291

MODEL NUMBER: RXC-66070122E-1.0

CUSTOMER NO.:

DATE:

