



Rev	Nature of Modification	DATE
1.0	First view	2018/01/19


Front view

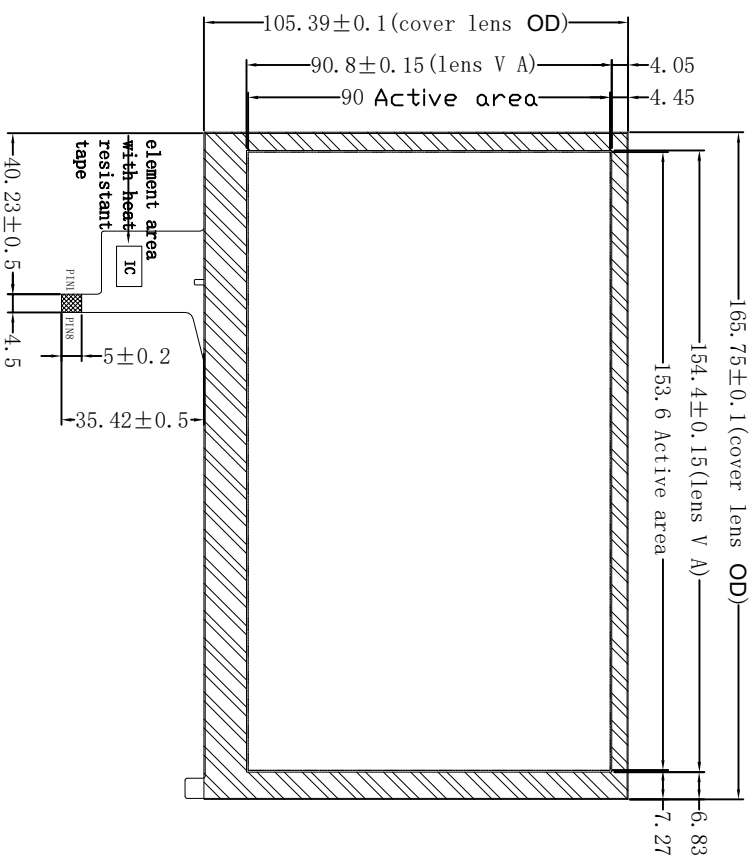

Side view

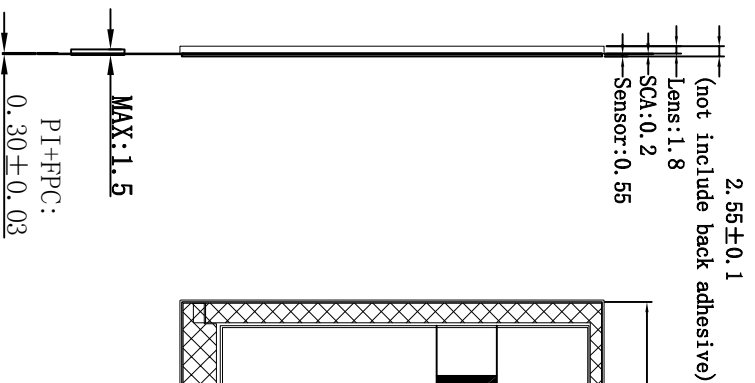

Back view

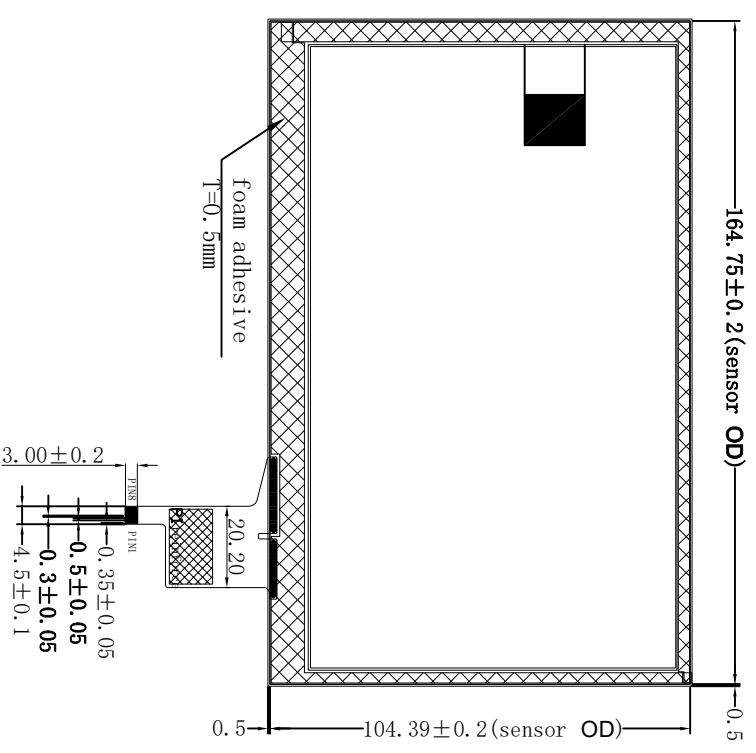

Technical Parameters:

1. Driver IC: FT5446
2. Structure: COVER GLASS (T=1.8mm) + SENSOR (ITO GLASS T=0.55mm)
3. Operating voltage: 2.8V~3.3 V;  
I2C communication voltage: 2.8V~3.3 V
4. Transparent rate: ≥85%
5. Surface hardness: ≥6H
6. Operating temperature: -20°C~+70°C, ≤90%RH
7. Storage temperature: -30°C~+80°C, ≤90%RH
8. Unmarked tolerance: ±0.2mm
9. Meet ROHS environmental requirements

no.	IIC
1	GND
2	VDD
3	SDA
4	SCL
5	/RST
6	INT
7	TEST
8	GND

SCALE: 1:1  
NOT TO SCALE

PAGE: 1 OF 1

GENERAL TOL:  
0.50mm

APPROVALS

APP:

CHK:

DWN:

UNITS  
MM

**Reshine Display (HK) Technology**  
**Co., Limited**

Tel: 0755-29190292 Fax: 0755-29190291

MODEL NUMBER:

RXC-G6070136A-1.0

CUSTOMER NO.:



DATE: 2018-01-19