


Rev	Nature of Modification	DATE
01	First version	2016/09/18
02		

Front view

Side view


Back view

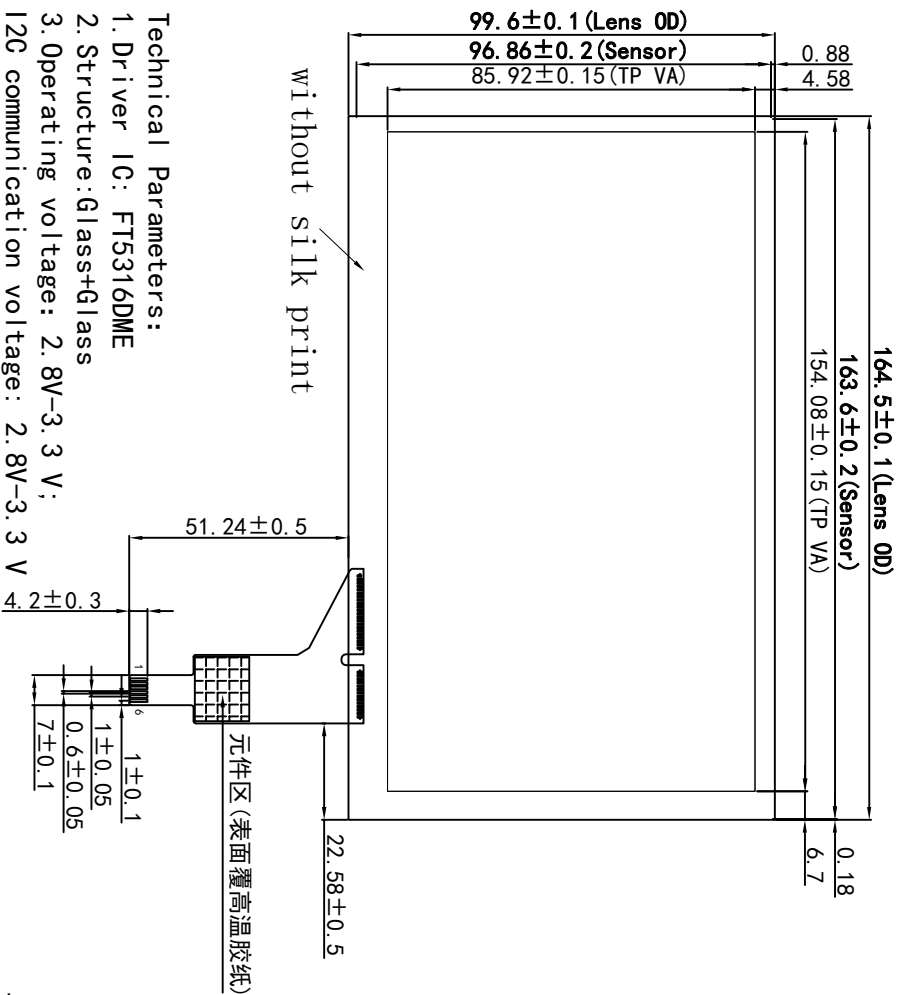

- Technical Parameters:
1. Driver IC: FT5316DME
 2. Structure: Glass+Glass
 3. Operating voltage: 2.8V-3.3 V;
 4. Transparent rate: ≥80%
 5. Surface hardness: ≥6H
 6. Operating temperature: -20°C~+70°C, ≤90%RH
 7. Storage temperature: -30°C~+80°C, ≤90%RH
 8. Unmarked tolerance: ±0.1mm
 9. Meet ROHS environmental requirements

逻辑定义

PIN	Definition
1	VDD
2	SCL
3	SDA
4	GND
5	INT
6	RST

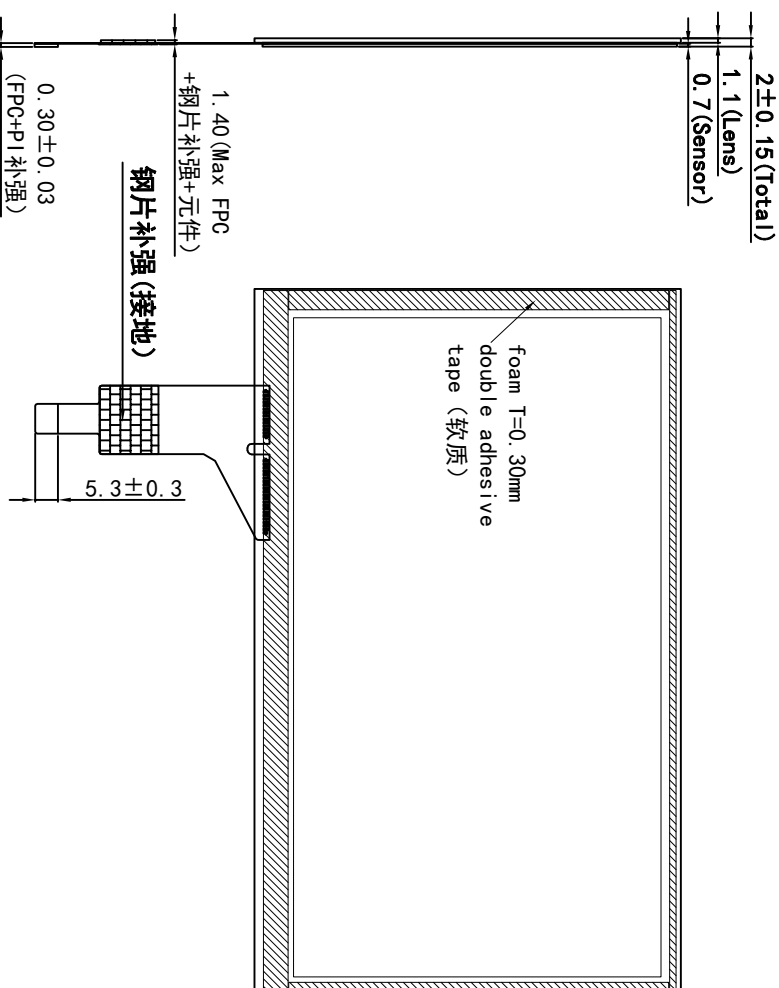

由 Autodesk 教育版产品制作

8 7 6

SCALE: 1:1
NOT TO SCALE

PAGE: 1 OF 1

GENERAL TOL.
0.30mm

APPROVALS

APP: _____ DATE _____

CHK: _____

DMN: YANHAI 2018-08-14

R X Reshine Display (HK) Technology
Co., Limited

MODEL NUMBER: RXG-6607037M-1.0

CUSTOMER NO.: _____ DATE: _____

Autodesk 教育版产品制作

3 2 1