


|     |                        |            |
|-----|------------------------|------------|
| Rev | Nature of Modification | DATE       |
| 01  | 原始版本                   | 2017-07-29 |

Front view

Side view

Back view

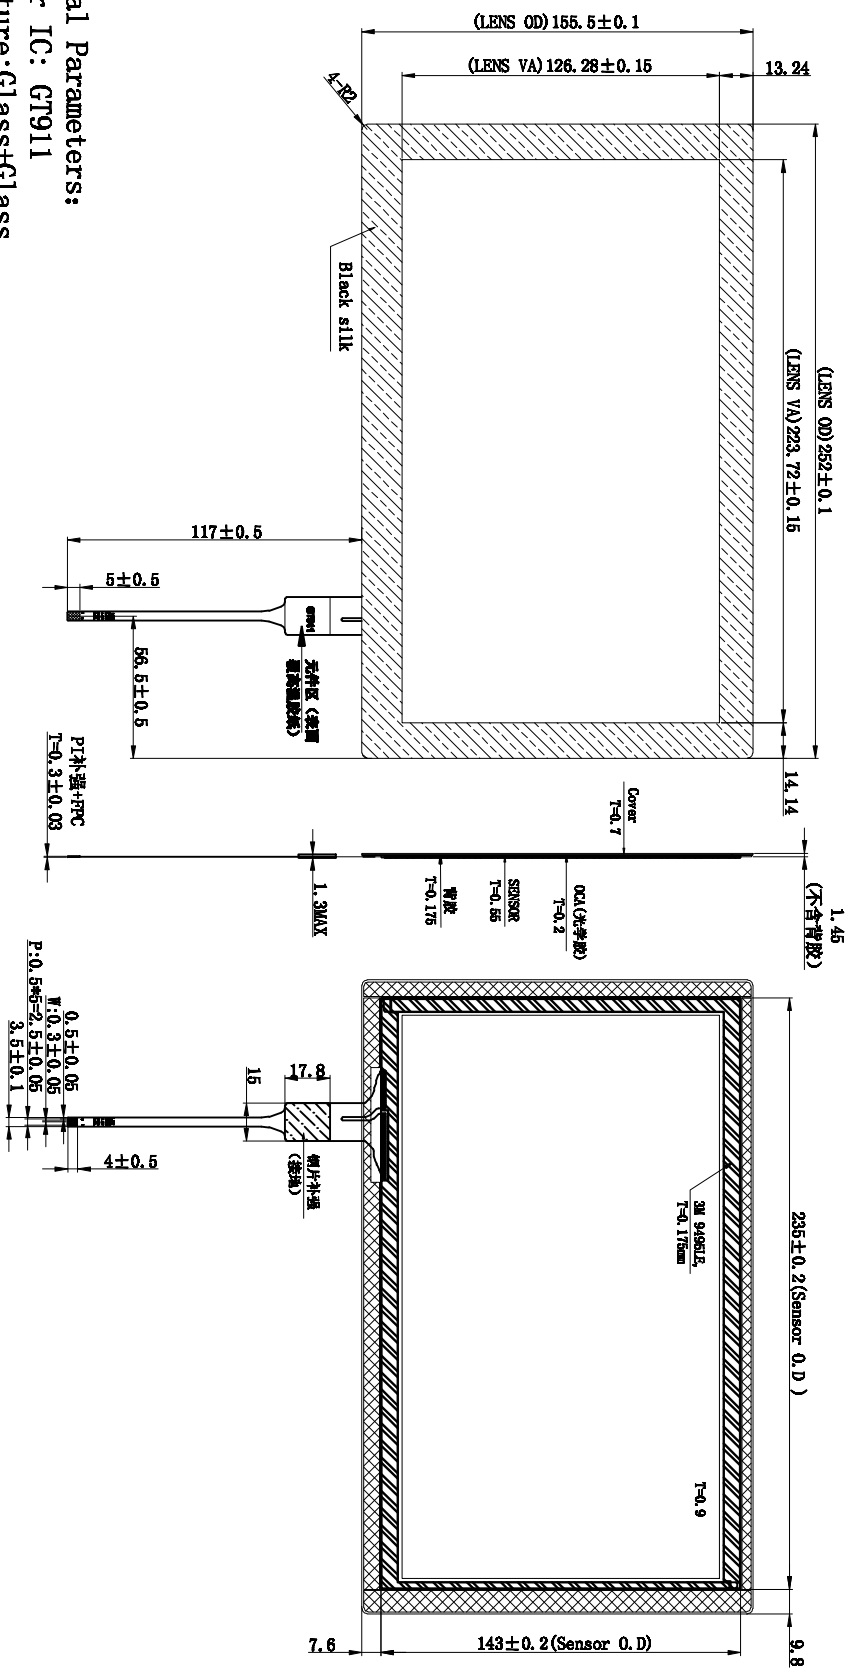

由 Autodesk 教育版产品制作

由 Autodesk 教育版产品制作

Technical Parameters:

1. Driver IC: GT911
2. Structure: Glass+Glass
3. Operating voltage: 2.8V-3.3 V;
4. Transparent rate: ≥85%
5. Surface hardness: ≥6H
6. Operating temperature: -20°C~+70°C, ≤90%RH
7. Storage temperature: -30°C~+80°C, ≤90%RH
8. Unmarked tolerance: ±0.2mm
9. Meet ROHS environmental requirements

Pin 定义

| Pin | Name    |
|-----|---------|
| 1   | RST     |
| 2   | VDD3.3V |
| 3   | GND     |
| 4   | INT     |
| 5   | SDA     |
| 6   | SCL     |

|                            |                        |   |
|----------------------------|------------------------|---|
| SCALE: 1:1<br>NOT TO SCALE |                        | <p>Reshine Display (HK)<br/>Technology Co., Limited</p> |
| PAGE: 1 OF 1               | GENERAL TOL:<br>0.10mm |   |
| APPROVALS                  | UNITS<br>MM            | DATE  |
| APP:                       | MODEL NUMBER:          | CUSTOMER<br>NO.:  |
| CHEK:                      | PCO-081010804-1.0      | DATE:<br>2017-07-29                                     |
| DMN:                       | 2017-07-29             |   |

A

A

8 7 6 5 4 3 2 1