



Rev	Nature of Modification	DATE
01	First version	2018-01-15


Front view

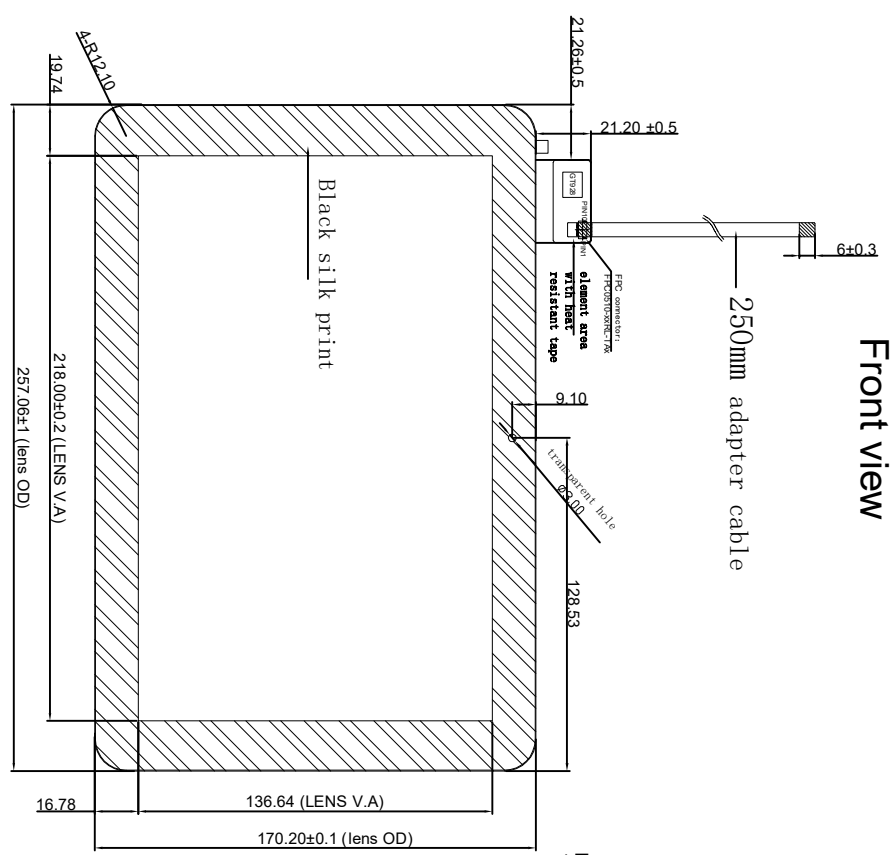

Side view

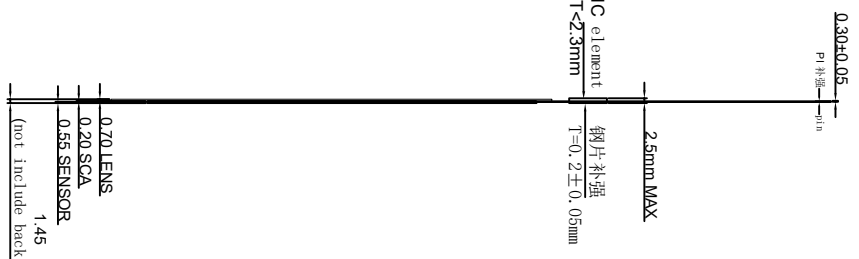


Back view

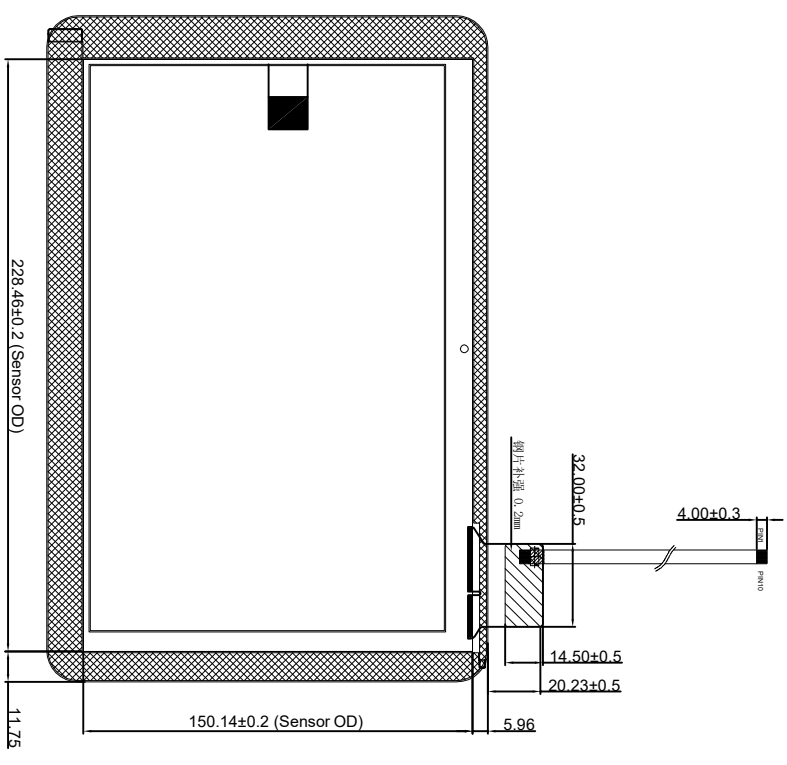

Technical Parameters:

1. Driver IC: GT928
2. Structure: Glass+Glass
3. Operating voltage: 2.8V~3.3 V;
I2C communication voltage: 2.8V~3.3 V
4. Transparent rate: ≥85%
5. Surface hardness: ≥6H
6. Operating temperature: -20℃~+70℃
7. Storage temperature: -30℃~+80℃
8. Unmarked tolerance: ±0.2mm
9. Meet ROHS environmental requirements



PIN	OUT	PIN	OUT
1	VCC3.3	6	RESET
2	GND	7	NC
3	SDA	8	NC
4	SCL	9	NC
5	INT	10	Wake

SCALE: 1:1 NOT TO SCALE		PAGE: 1 OF 1	
GENERAL TOL. 0.50mm		UNITS MM	
APPROVALS		DATE	
APP:		MODEL NUMBER:	
CHK:		RXG-66101135A-1.0	
DWN:		MHY	
		2018-01-15	
<p>Reshine Display (HK) Technology Co., Limited</p>		Tel: 0755-29190292	
		Fax: 0755-29190291	
CUSTOMER NO.:			
DATE: 2018-01-15			