




Front view

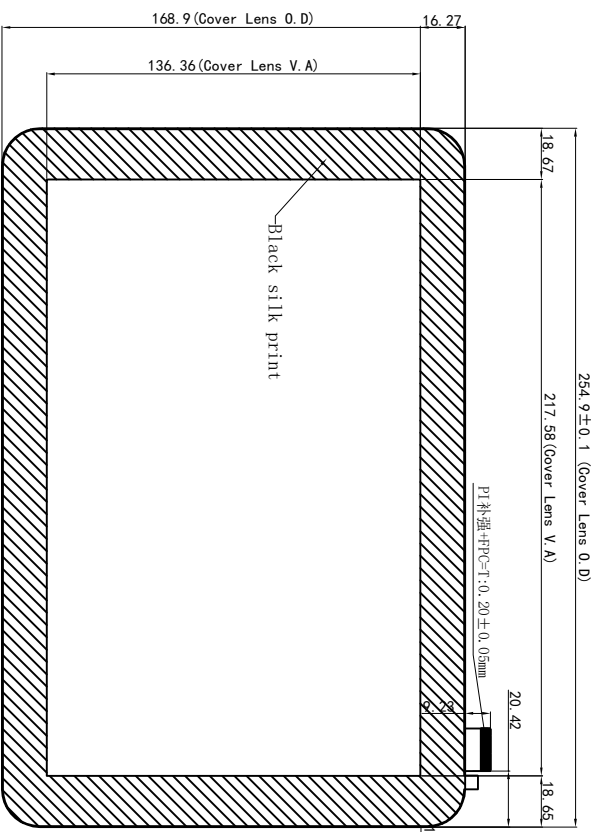

Side view

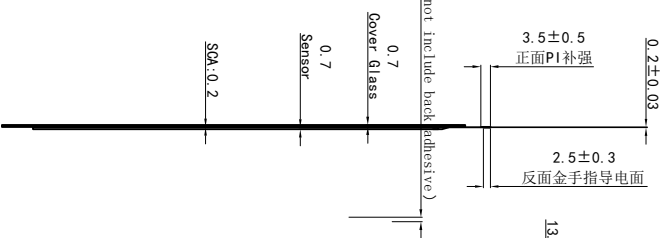

Back view

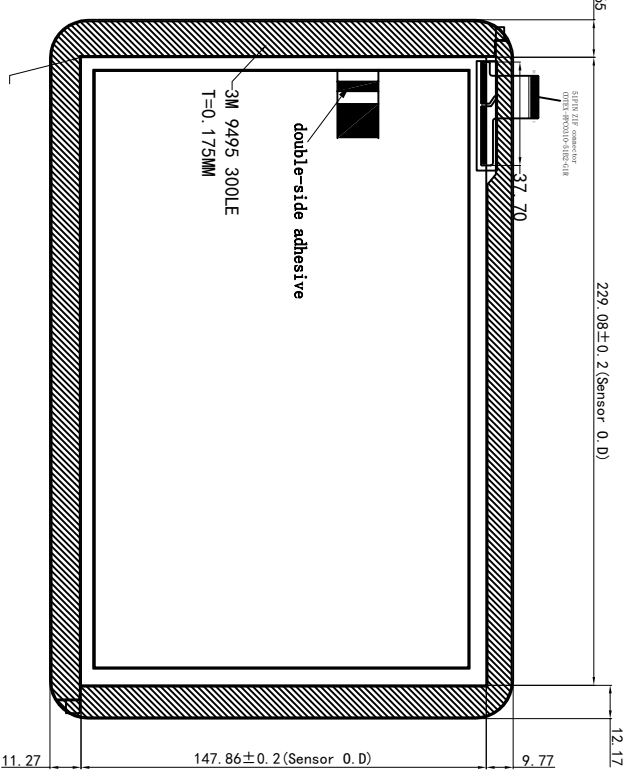

Technical Parameters:

1. Glass Lens + ITO Glass + Adhesive + FPC
2. Operating voltage: 2.8V~3.3V
3. Transparent rate: ≥85%
4. Surface hardness: ≥6H
5. Operating temperature: -20°C~+70°C, ≤90%RH
6. Storage temperature: -30°C~+80°C, ≤90%RH
7. Unmarked tolerance: ±0.2mm
8. Meet ROHS environmental requirements

PIN Definition

Pin	Name
1	GND
2-19	Sen0-Sen17
20-21	GND
22	NC
23-36	EXC26-EXC13
37-49	EXC0-EXC12
50-51	GND

SCALE: 1:1 NOT TO SCALE		Reshine Display (HK) Technology	
PAGE: 1 OF 1		Co., Limited	
GENERAL TOL. 0.50mm	UNITS MM	Tel: 0755-29190292	Fax: 0755-29190291
APPROVALS	DATE	MODEL NUMBER :	
APP: _____		RXC-66101201A-1.0	
CHK: _____			
DWN: LY	2018-10-13		
		CUSTOMER NO.:	DATE: