


| Rev | Nature of Modification | DATE |
|-----|------------------------|------------|
| 01 | First version | 2018/05/17 |


Front view

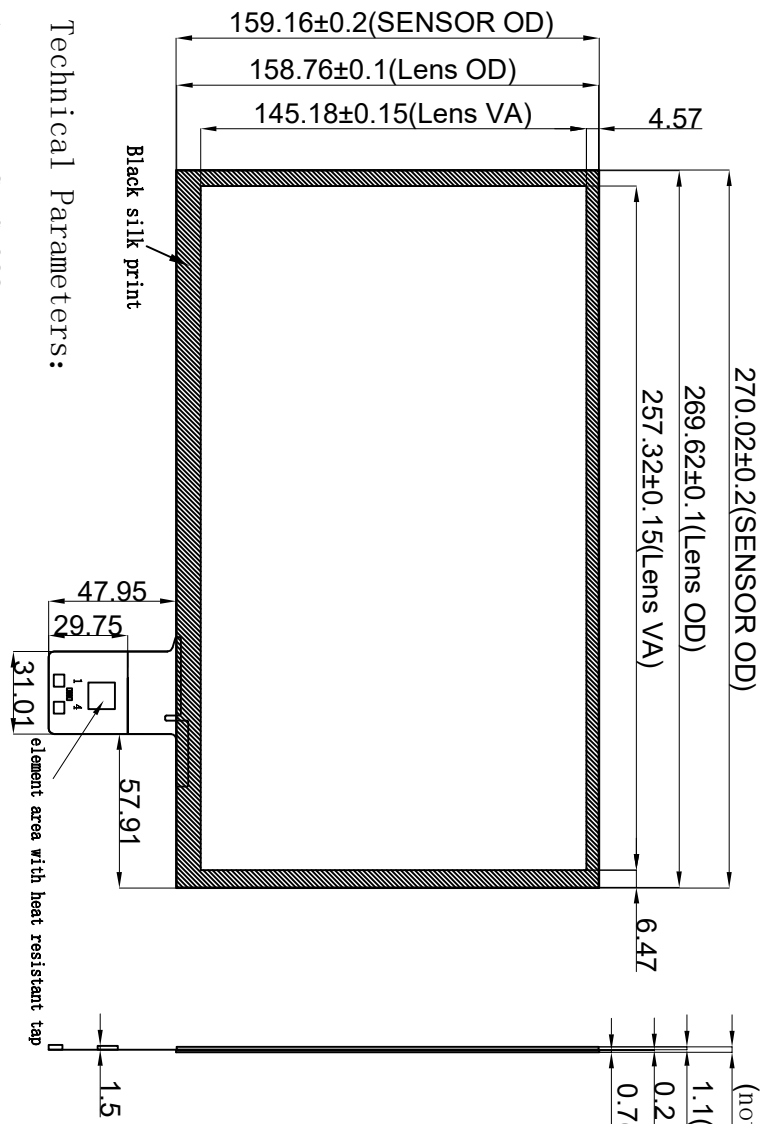


Technical Parameters:

1. Driver IC: GT928
2. Structure: Glass+Glass
3. Operating voltage: 2.8V-3.3 V;
I2C communication voltage: 2.8V-3.3 V
4. Transparent rate: $\geq 80\%$
5. Surface hardness: $\geq 6H$
6. Operating temperature: $-20^{\circ}C \sim +70^{\circ}C$, $\leq 90\%RH$
7. Storage temperature: $-30^{\circ}C \sim +80^{\circ}C$, $\leq 90\%RH$
8. Unmarked tolerance: $\pm 0.2mm$
9. Meet ROHS environmental requirements

Side view

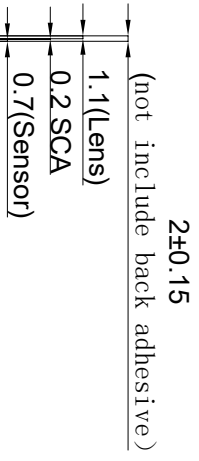

Back view

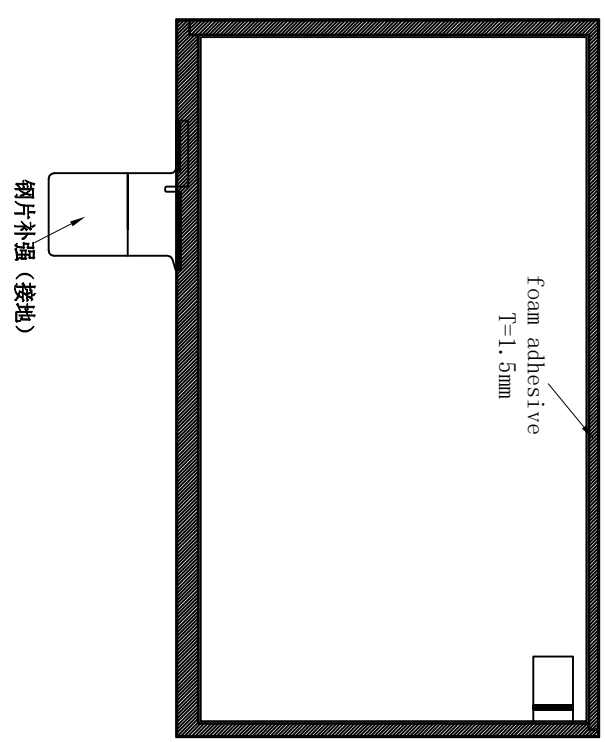

PIN Definition

| PIN# | Name |
|------|------|
| 1 | VCC |
| 2 | D- |
| 3 | D+ |
| 4 | GND |

SCALE: 1 : 1
NOT TO SCALE

PAGE: 1 OF 1

GENERAL TOL.
0.50mm

APPROVALS

CHK:

DWN:

UNITS
MM

DATE

APP:

YANHAI
2018-05-17

R X Reshine Display (HK) Technology Co., Limited

Tel: 0755-23063683 Fax: 0755-23592853

MODEL NUMBER :

RXC-66116169A-1.0



CUSTOMER NO.:
DATE: