


Rev	Nature of Modification	DATE
01	First version	2017-08-31

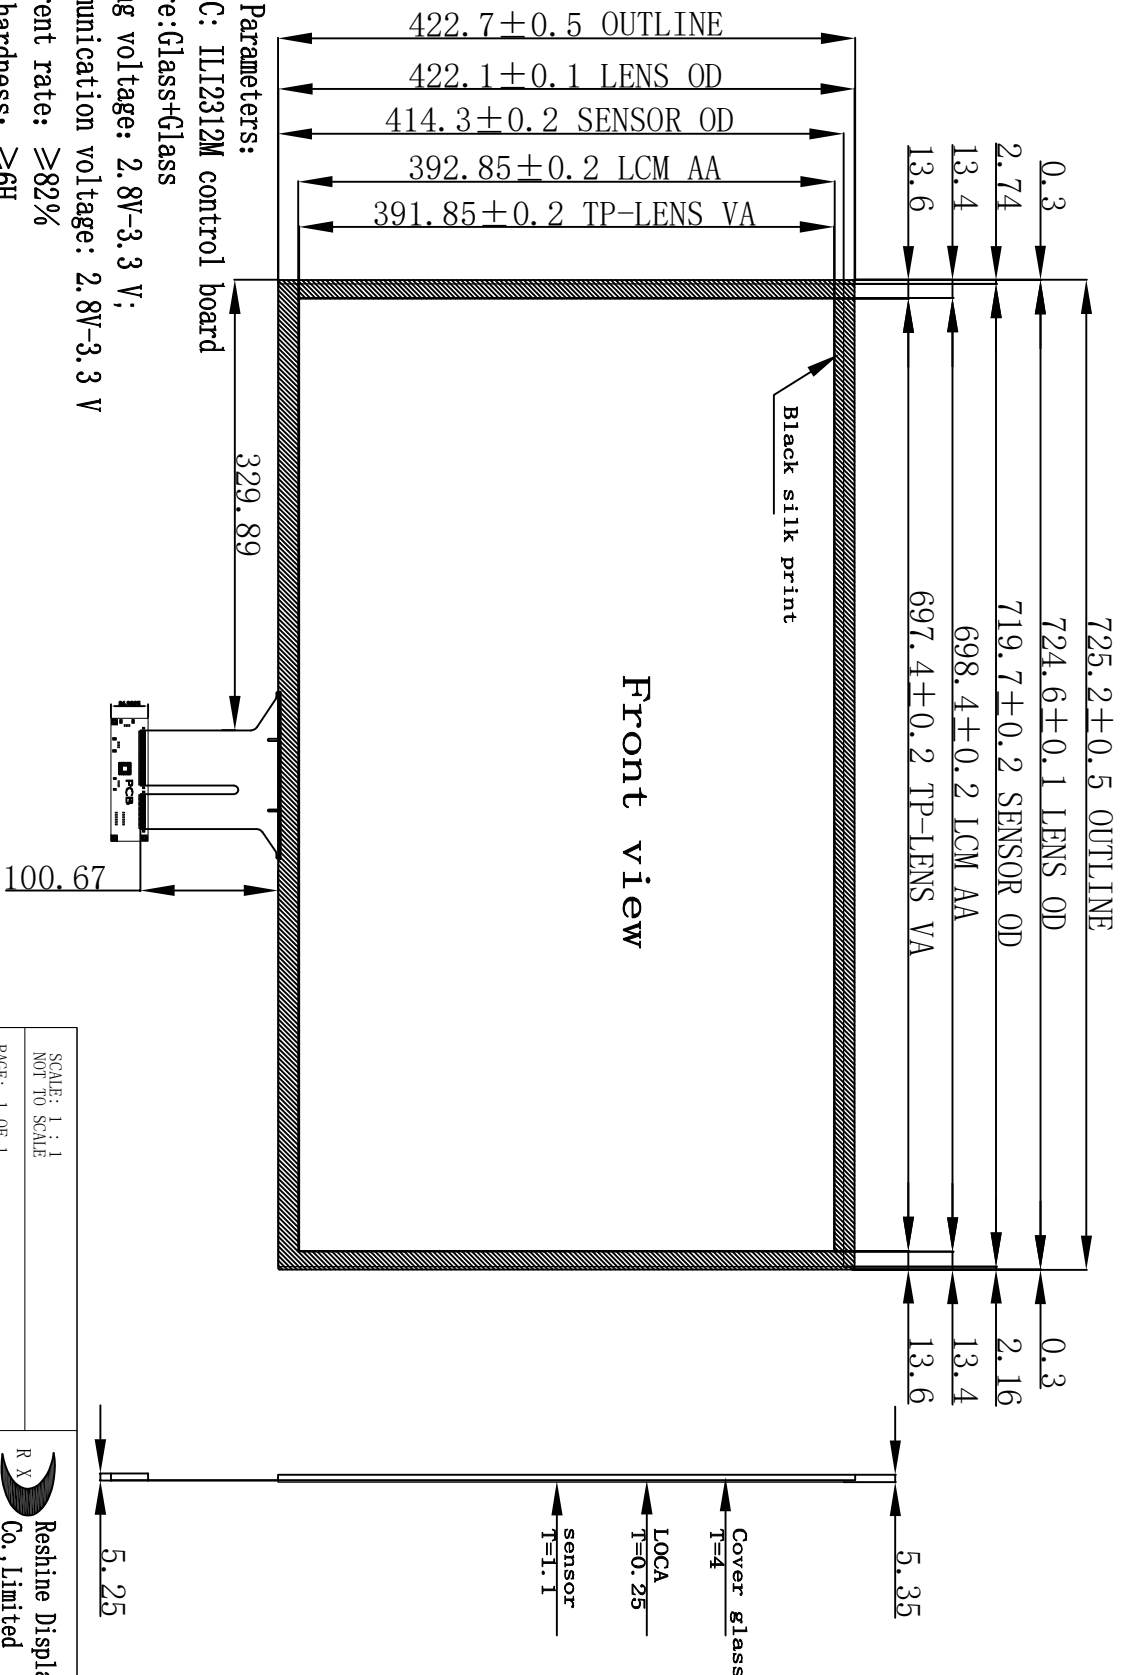

Front view

Technical Parameters:

1. Driver IC: ILI2312M control board
2. Structure: Glass+Glass
3. Operating voltage: 2.8V-3.3 V;
I2C communication voltage: 2.8V-3.3 V
4. Transparent rate: $\geq 82\%$
5. Surface hardness: $\geq 6H$
6. Operating temperature: $-20^{\circ}\text{C} \sim +70^{\circ}\text{C}$, $\leq 90\%RH$
7. Storage temperature: $-30^{\circ}\text{C} \sim +80^{\circ}\text{C}$, $\leq 90\%RH$
8. Unmarked tolerance: $\pm 0.2\text{mm}$
9. Meet ROHS environmental requirements

SCALE: 1 : 1 NOT TO SCALE		R X Reshine Display (HK) Technology Co., Limited	
PAGE: 1 OF 1		Tel: 0755-29190292 Fax: 0755-29190291	
GENERAL TOL. 0.50mm		UNITS MM	
APPROVALS		DATE	
APP:		MODEL NUMBER :	
CHK:		RXO-6632094A-1.0	
DWN:		YANHAI 2017-08-31	
		CUSTOMER NO.:	
		DATE: 2017-08-31	