



Rev	Nature of Modification	DATE
01	First version	2017-10-20
02	changed cover AA and thickness of foam tape	2018-07-30


Front View

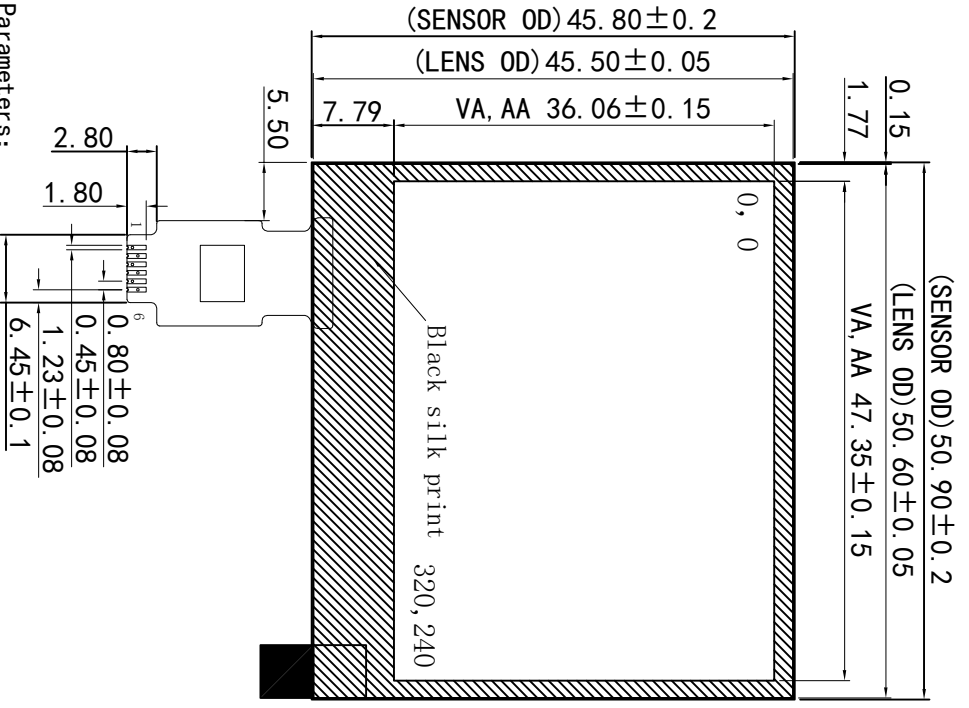

Side View

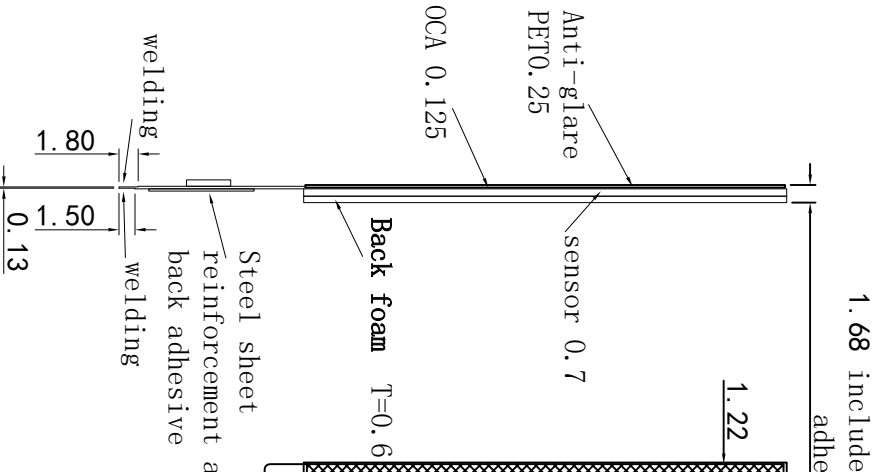

Back View

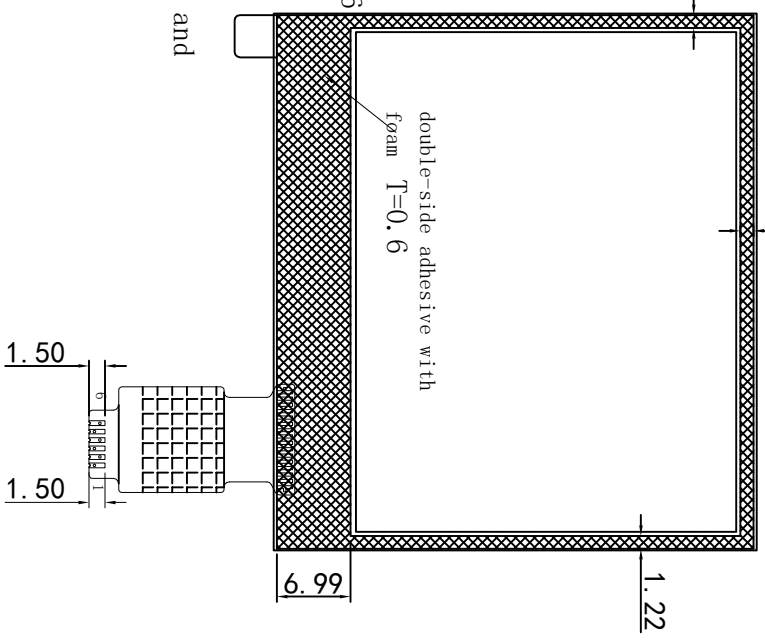

Technical Parameters:

1. Driver IC: FT6236U
2. Operating voltage: 2.8V-3.3 V;
12G communication voltage 2.8V-3.3 V
3. Transparent rate: $\geq 60\%$
4. Surface hardness: $\geq 3H$
5. Operating temperature: $-20^{\circ}\text{C}\sim+70^{\circ}\text{C}$, $\leq 90\%\text{RH}$
6. Storage temperature: $-30^{\circ}\text{C}\sim+80^{\circ}\text{C}$, $\leq 90\%\text{RH}$
7. Unmarked tolerance: $\pm 0.2\text{mm}$
8. Meet ROHS environmental requirements

Pin Assignment

PIN NO.	SIGNAL
1	/RESET
2	/INT
3	SDA
4	SCL
5	GND
6	VDD

SCALE: 1 : 1 NOT TO SCALE		<p>Resline Display (HK) Technology Co., Limited</p> <p>Tel: 0755-23063683 Fax: 0755-23592853</p>	
PAGE: 1 OF 1			
GENERAL TOL. 0.50mm	UNITS MM	MODEL NUMBER :	
APPROVALS	DATE	RXC-PE024104A-2.0	
APP:			
CHK:			
DWN:	yanhai	2018-07-30	