



Rev	Nature of Modification	DATE
01	First version	2016/11/24
01		


Front view

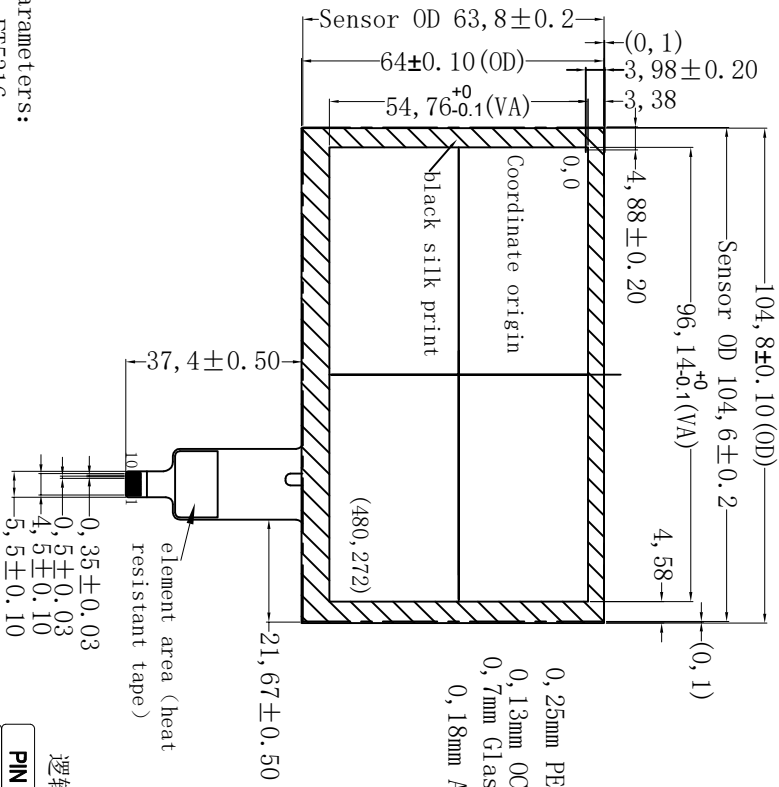

Side view

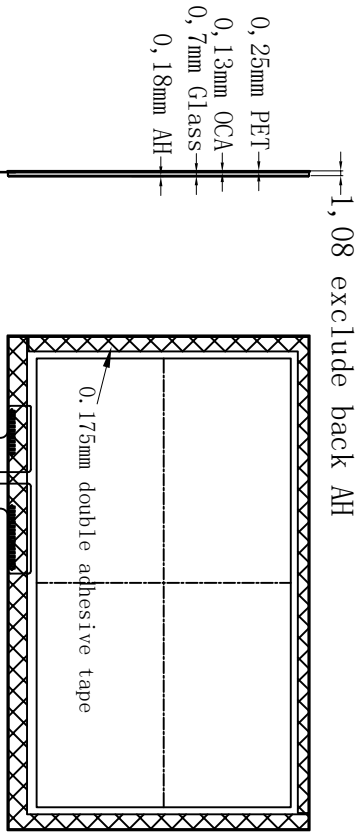

Back view

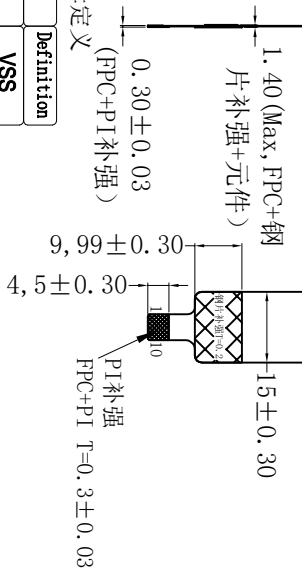

逻辑定义

PIN	Definition
1	VSS
2	VDD
3	SCL
4	VSS
5	SDA
6	VSS
7	/RST
8	NC
9	INT
10	VSS

- Technical Parameters:
1. Driver IC: FT5316
 2. Structure: Glass+Glass+AG coating
 3. Operating voltage: 2.8V~3.3 V;
 4. I2C communication voltage: 2.8V~3.3 V
 5. Transparent rate: $\geq 80\%$
 6. Surface hardness: $\geq 2H$
 7. Operating temperature: $-20^{\circ}\text{C} \sim +70^{\circ}\text{C}$, $\leq 90\%RH$
 8. Storage temperature: $-30^{\circ}\text{C} \sim +80^{\circ}\text{C}$, $\leq 90\%RH$
 9. Unmarked tolerance: $\pm 0.2\text{mm}$
 9. Meet ROHS environmental requirements

SCALE: 1 : 1
NOT TO SCALE

PAGE: 1 OF 1

GENERAL TOL:
0.50mm

APPROVALS

APP: _____

CHK: _____

DWN: Fengwei 2016-11-24

UNITS: MM

DATE: _____

MODEL NUMBER: RYG-P604302-02

RESHINE DISPLAY (HK) TECHNOLOGY

Co., Limited

Tel: 0755-29190292 Fax: 0755-29190291

CUSTOMER NO.: _____

DATE: 2016-11-24