



Rev	Nature of Modification	DATE
01	First version	2016/11/25


Front View

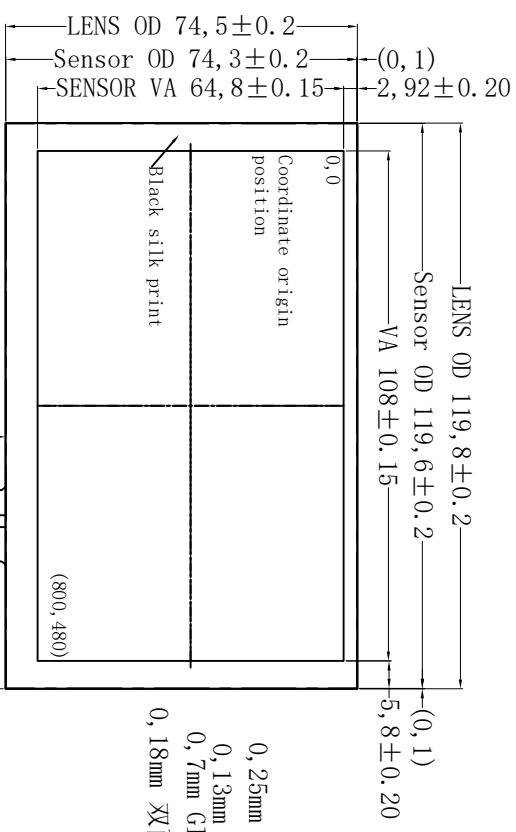

Side View

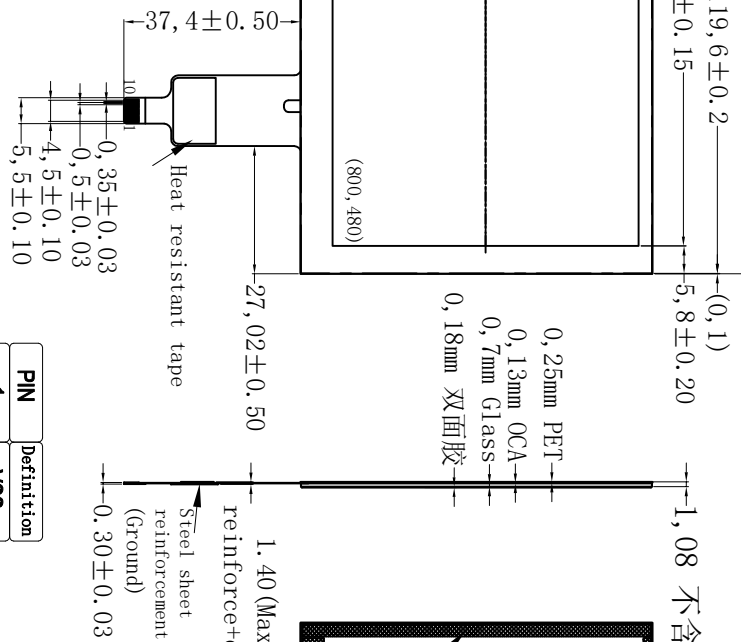

Back View

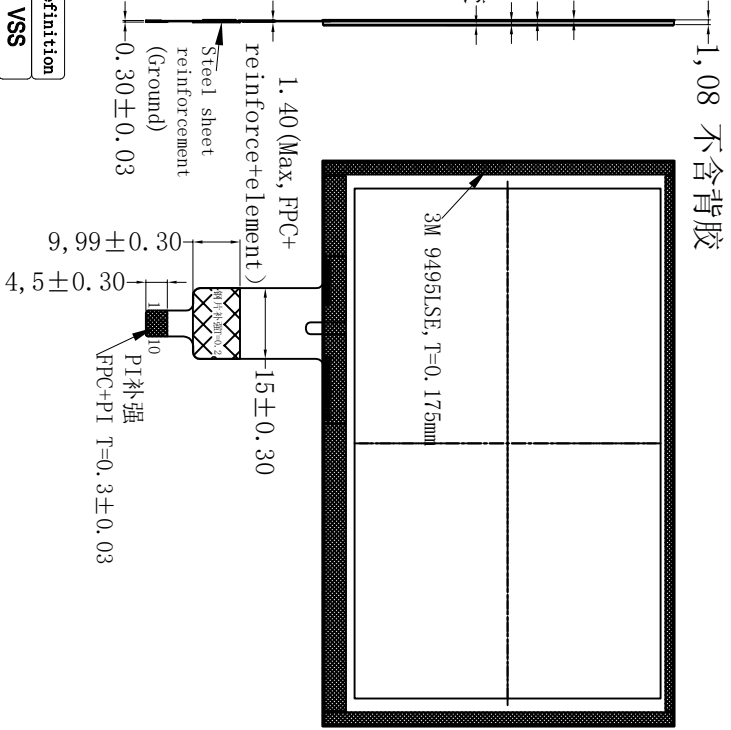

Technical Parameters:

1. Driver IC: FT5316
2. Operating voltage: 2.8V~3.3 V;
3. I2C communication voltage 2.8V~3.3 V
4. Transparent rate: $\geq 80\%$
5. Surface hardness: 2H
6. Operating temperature: $-20^{\circ}\text{C} \sim +70^{\circ}\text{C}$, $\leq 90\% \text{RH}$
7. Storage temperature: $-30^{\circ}\text{C} \sim +80^{\circ}\text{C}$, $\leq 90\% \text{RH}$
8. Unmarked tolerance: $\pm 0.2 \text{mm}$
9. Meet ROHS environmental requirements

PIN	Definition
1	VSS
2	VDD
3	SCL
4	VSS
5	SDA
6	VSS
7	/RST
8	NC
9	INT
10	VSS

SCALE: 1 : 1 NOT TO SCALE			
PAGE: 1 OF 1		Resline Display (HK) Technology Co., Limited	
GENERAL TOL. 0.50mm		UNITS MM	Tel: 0755-29190292 Fax: 0755-29190291
APPROVALS		DATE	
APP: _____		MODEL NUMBER :	
CHK: _____		RXC-P605003-01	
DWN: Fengwei		2016-11-25	
			CUSTOMER NO.: _____ DATE: 2016-11-25