
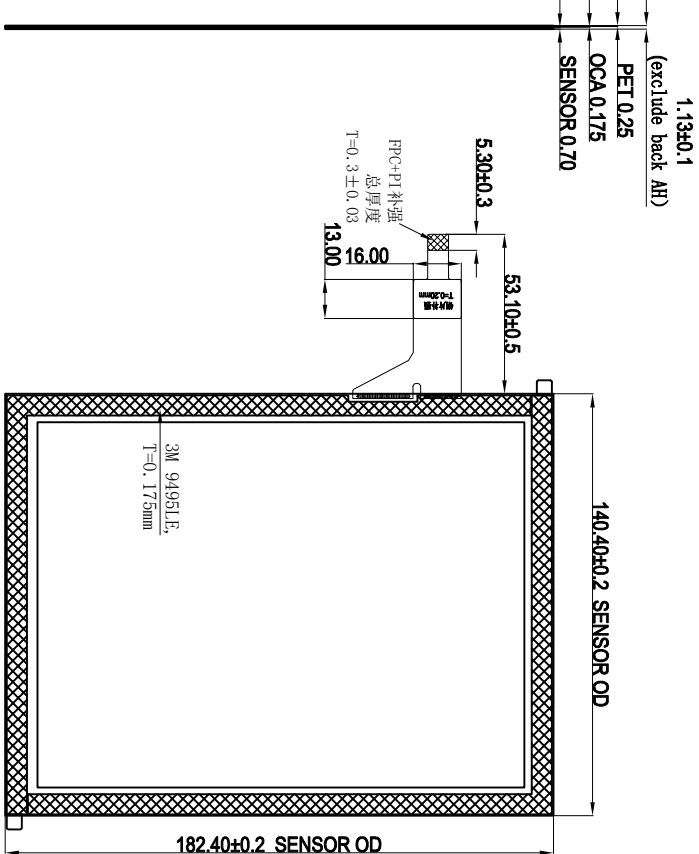


Rev	Nature of Modification	DATE
1.0	Firat version	

Front view

Side view

Back view

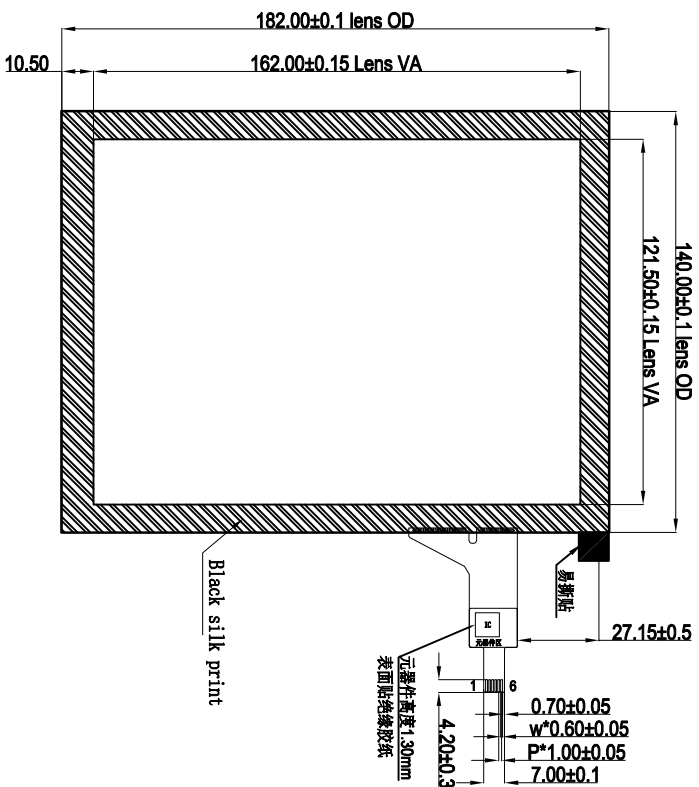

1. Structure: P+G
2. IC: GT911
3. Transparent rate: $\geq 80\%$
4. Surface hardness: $\geq 2H$
5. Operating temperature: $-10^{\circ}\text{C} \sim +60^{\circ}\text{C}$, $\leq 90\% \text{RH}$
6. Storage temperature: $-20^{\circ}\text{C} \sim +70^{\circ}\text{C}$, $\leq 90\% \text{RH}$
7. Unmarked tolerance: $\pm 0.2 \text{mm}$
8. Meet ROHS environmental requirements

PIN	Definite
1	VDD
2	SCL
3	SDA
4	GND
5	INT
6	RST

SCALE: 1 : 1 NOT TO SCALE		R X Reshine Display (HK) Technology Co., Limited	
PAGE: 1 OF 1	UNITS MM	Tel: 0755-29190292 Fax: 0755-29190291	
GENERAL TOL. 0.50mm	DATE	MODEL NUMBER :	CUSTOMER NO.:
APPROVALS			DATE:
CHK:		RXC-PG0800930-1.0	
DWN:	YANHAI	2017-12-28	