



Rev	Nature of Modification	DATE
1.0	First version	2017/07/25


Front view

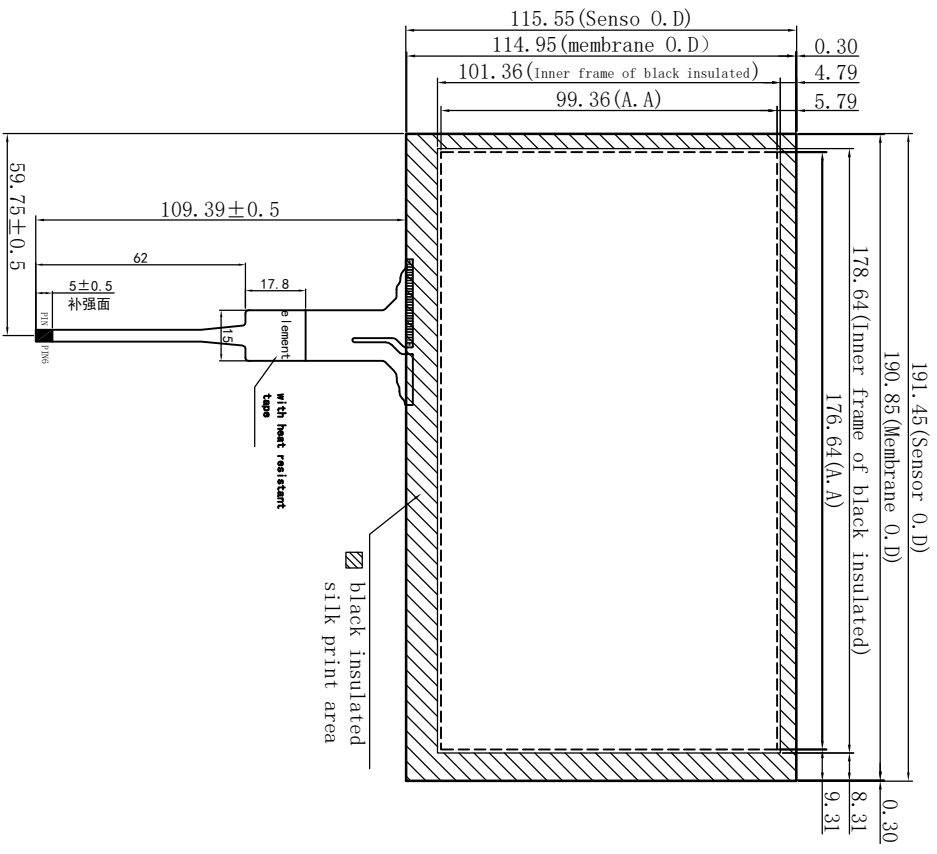

Side view

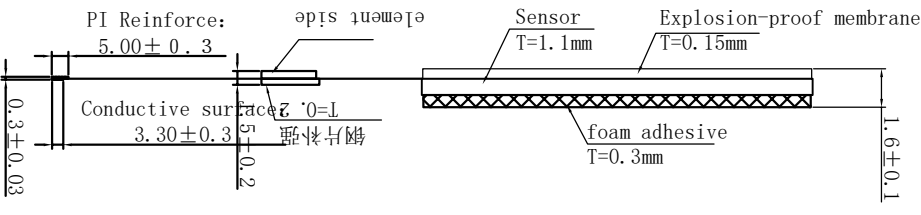

Back view

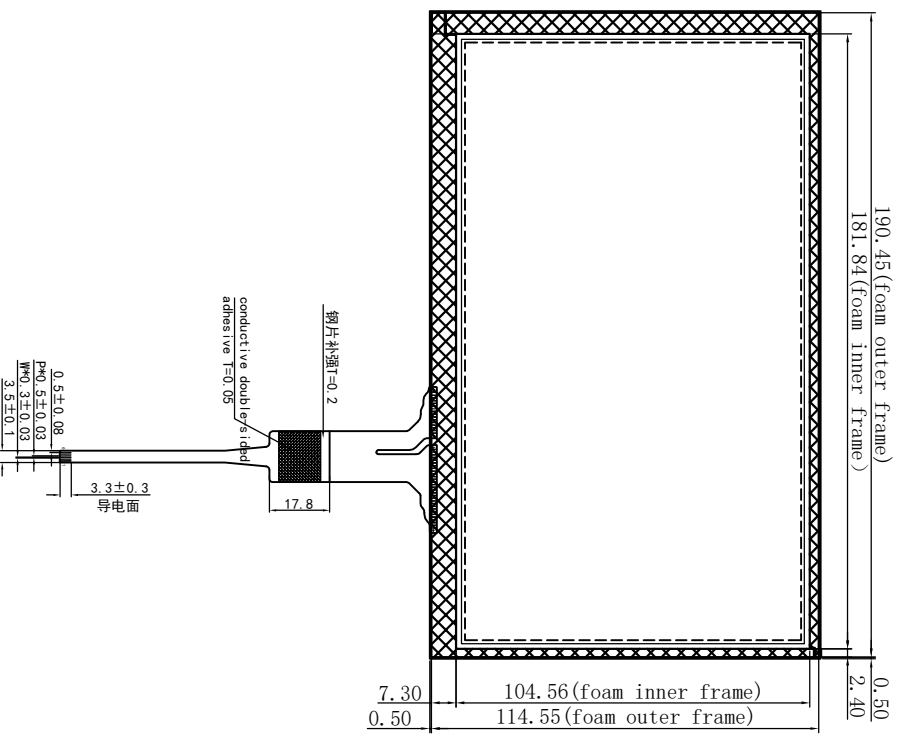

Technical Parameters:

1. Driver IC: GF911
2. Structure: Explosion-proof membrane +GLASS
3. Operating voltage: 2.8V-3.3 V;
I2C communication voltage: 2.8V-3.3 V
4. Transparent rate: $\geq 80\%$
5. Surface hardness: $\geq 3H$
6. Operating temperature: $-20^{\circ}\text{C}^{\sim}+70^{\circ}\text{C}$, $\leq 90\%RH$
7. Storage temperature: $-30^{\circ}\text{C}^{\sim}+80^{\circ}\text{C}$, $\leq 90\%RH$
8. Unmarked tolerance: $\pm 0.2\text{mm}$
9. Meet ROHS environmental requirements

PIN Definition

PIN#	Name
1	RST
2	VDD
3	GND
4	INT
5	SDA
6	SCL

NOT TO SCALE

PAGE: 1 OF 1

GENERAL TOL.
0.50mm

APPROVALS

APP:

CHK:

DWN: MHY

UNITS
MM

DATE

MODEL NUMBER :

RXC-PG080134A-1.0

Tel: 0755-29190292 Fax: 0755-29190291

R X Reshine Display (HK) Technology Co., Limited

CUSTOMER NO.:

DATE: 2017-01-10