


1	H
2	X
3	S
4	Y
5	L

产品逻辑图

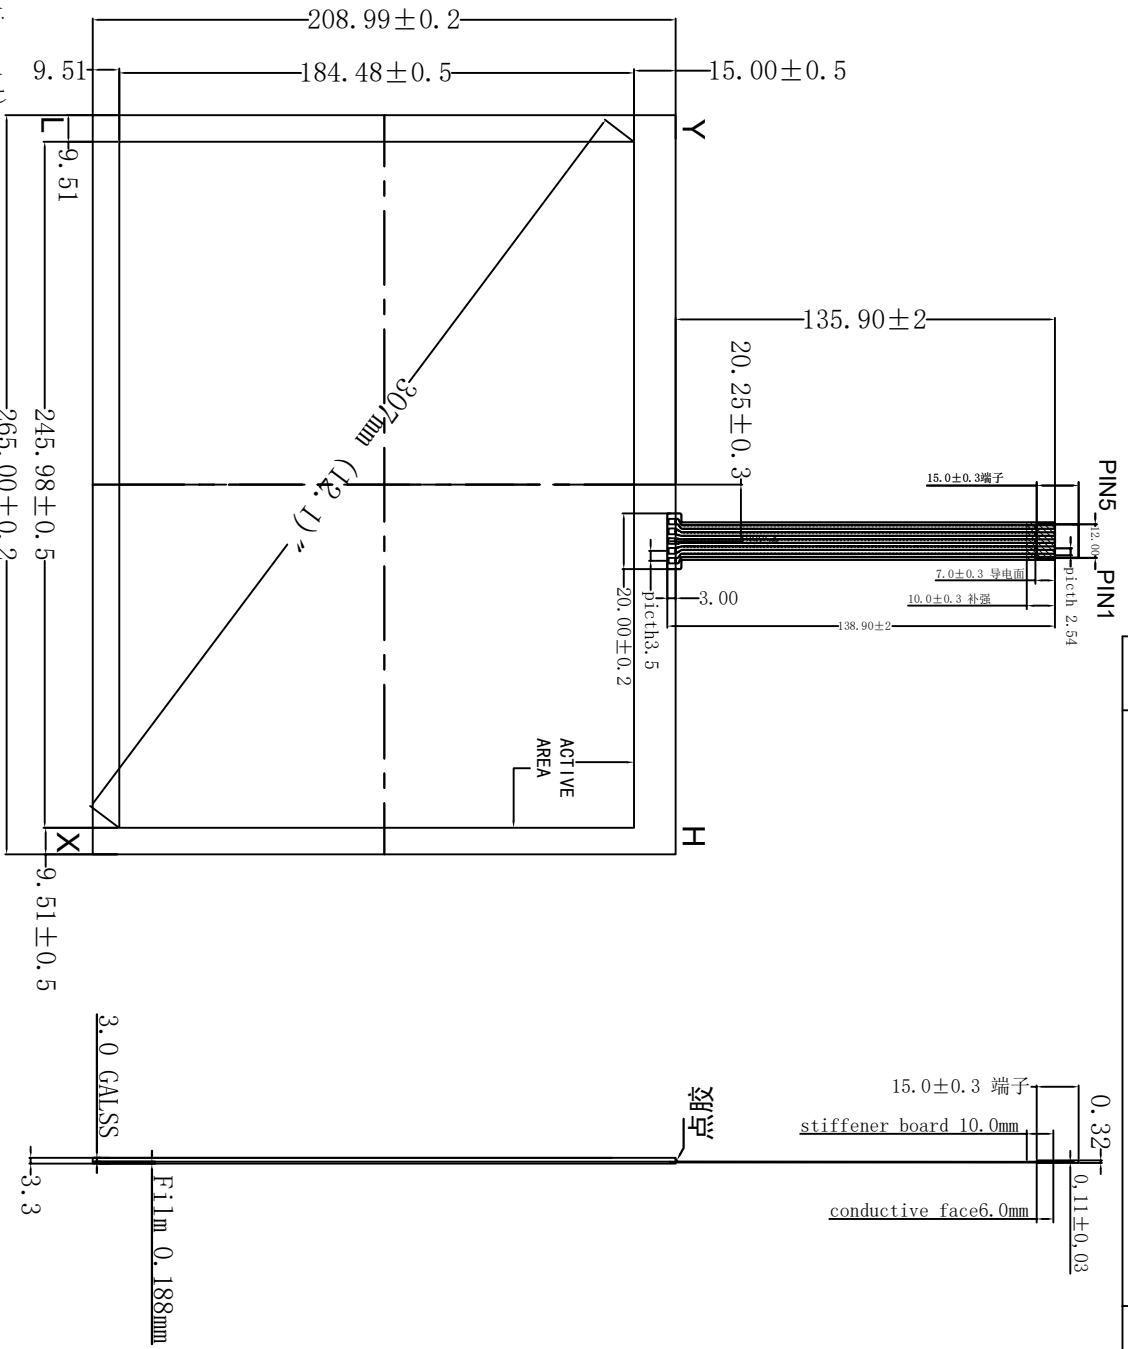

Technical parameters:

1. Structure: films+glass+PPC (Matte anti-scratch)
2. IT0 Film type: Anti-glare and anti-newton ring coating
3. Circuit level: DC5V 1mA
4. Surface hardness: ≤3H
5. Linearity: ≤2.5%
6. Transparent rate: ≥76%
7. Operating pressure: 50-150g
8. Operational life span: ≥35,000,000 times
9. Operating temperature: -20°C~+70°C
10. Storage temperature: -30°C~+80°C
11. Unmarked tolerance: ±0.3mm
12. X: 200-900 Ω Y: 200-900 Ω
13. Meet ROHS environmental requirements

REV.	DESCRIPTION	DATE
A/1		

SCALE: 1 : 1
NOT TO SCALE

PAGE: 1 OF 1

GENERAL TOL. 0.20mm

APPROVALS

APPROVALS	DATE	UNITS
APP Mychan	2016-06-15	MM
CHK Amor11	2016-06-15	
DRAW Amor11	2016-06-15	

MODEL NUMBER : RXF-12003-02R

PROTECTION

DATE: 2016-06-15

Reshine Display (HK) Technology
Co., Limited

Tel: 0755-29190292 Fax: 0755-29190291