



TP

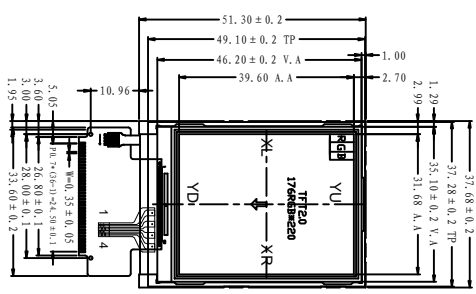

- NOTE:
1. LCD TYPE: 2.0" TFT
 2. LCD IC: ILI9225G
 3. VIEWING DIRECTION: 12:00' CLOCK
 4. BACKLIGHT: 3 CHIPS WHITE LED
 5. OPERATION TEMP: -20°C ~ 70°C
 6. STORAGE TEMP: -30°C ~ 80°C
 7. GENERAL TOLERANCE: ±0.2
 8. Connector: FPC

REV	Revision content description	Date
A	FIRST ISSUE	2016.04.20

TOLERANCE(公差)	Mod.Name	PART.Name	DRAWING NAME
UNLESS OTHERWISE SPECIFIED X.XX±0.2			ASSEMBLE

PIN	SYMBOL	RX020A-01C
1	DB15	
2	DB14	
3	DB13	
4	DB12	
5	DB11	
6	DB10	
7	DB9	
8	DB8	
9	GND	
10	DB7	
11	DB6	
12	DB5	
13	DB4	
14	DB3	
15	DB2	
16	DB1	
17	DB0	
18	IDVCC	
19	VDD	
20	RD	
21	VR	
22	RS	
23	CS	
24	RESET	
25	NC	
26	GND	
27	A	
28	K1	
29	K2	
30	K3	
31	Y+(YD)	
32	Y-(YD)	
33	X+(XR)	
34	X-(XL)	
35	GND	
36	FMARK	

FPC弯折示意图