


No.	PIN
1	VDD
2	GND
3	LEDA
4	RESET
5	CS
6	RS
7	WR
8	RD
9	NC
10	NC
11	NC
12	NC
13	NC
14	NC
15	NC
16	NC
17	DB0
18	DB1
19	DB2
20	DB3
21	DB4
22	DB5
23	DB6
24	DB7
25	YU
26	XL
27	YD
28	XR
29	NC
30	NC

SPECIFICATION:
 1.DISPLAY TYPE: 2.83'TFT,TRANSMISSIVE,NORMAL WHITE
 2.VIEWING ANGLE: 12:00(Gray Inversion) 6:00(Human Eye)
 3.OPERATION TEMPERATURE: -20°C--+70°C
 4.STORAGE TEMPERATURE: -30°C--+80°C
 5.DRIVER IC: ST7789V
 6.BACKLIGHT: WHITE LED(I_f=60mA,4 LEDS)
 7.ALL UNMARKED TOLERANCES: ±0.2mm

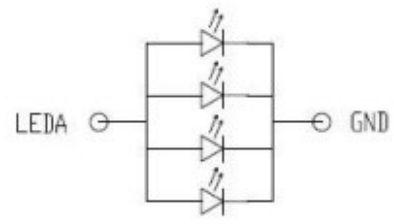

RX Reshine Display (HK) Technology Co., Limited		
绘图: LiuJun	产品型号: RXL028037-A	单位: mm
审核:	图纸编号:	日期:
批准:	图纸版号: A0	页数: 1/1