




AFTER BENDING FPC
FPC折弯后示图

FPC INTERFACE	
NO.	SYMBOL
1	LED+
2	LED-
3	GND
4	RESET
5	VSYNC
6	HSYNC
7	DOTCLK
8	ENABLE
9	DB17
10	DB16
11	DB15
12	DB14
13	DB13
14	DB12
15	DB11
16	DB10
17	DB9
18	DB8
19	DB7
20	DB6
21	DB5
22	DB4
23	DB3
24	DB2
25	DB1
26	DB0
27	SDI
28	SDO
29	RD
30	SCK/
31	RS
32	CS
33	FMAR
34	VCI
35	IOVCC
36	GND
37	Y+
38	X-
39	Y-
40	X+

- NOTES:
- 1.DISPLAY TYPE: 3.2" TFT LCD TRANSMISSIVE
 - 2.VIEWING DIRECTION: 12:00
 - 3.LCD DRIVER IC: ILI9341
 - 4.OPERATING TEMP: -20°C~70°C
 - 5.STORAGE TEMP: -30°C~80°C
 - 6.BACKLIGHT: 5CHIP-LED PARALLEL

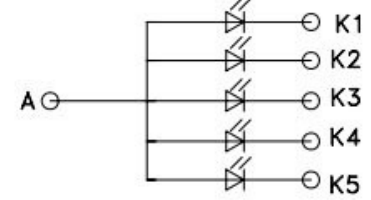

BL CIRCUIT DIAGRAM

RX Reshine Display (HK) Technology Co., Ltd.		
LCM NO.: RXL032040-A	FPC NO. A:	VERSION:
DESIGNED BY: QSC	FPC NO. B:	NO.: 1 OF
APPROVED BY:	FPC NO. C:	UNIT: M
	 	DATE: 2012