



REV	DESCRIPTION	DATE
0		13. 12. 04

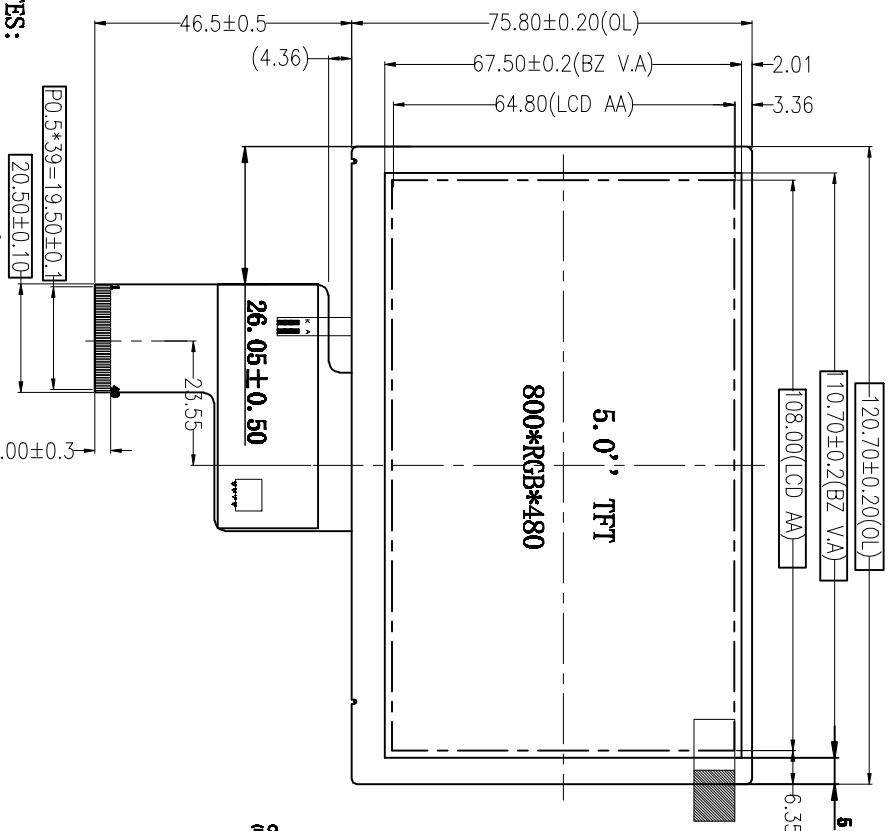

1	VLD-
2	VLD+
3	GND
4	VDD(S, SV)
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	R8
14	E1
15	E2
16	E3
17	E4
18	E5
19	E6
20	E7
21	R0
22	R1
23	R2
24	R3
25	R4
26	R5
27	R6
28	R7
29	GND
30	DC1K
31	
32	
33	
34	
35	
36	
37	
38	
39	
40	

- NOTES:
1. DISPLAY TYPE: 262K/65K TFT Transmissive, Normal White
  2. VIEWING DIRECTION: 6 o'clock
  3. LCD CONTROLLER: IL16122+IL16960
  4. BACKLIGHT: 2\*6 PCS WHITE LED
  5. OPERATING TEMP.: -20° C — 70° C
  6. STORAGE TEMP.: -30° C — 80° C
  7. UNMARKED TOLERANCE: ±0.3
  - 8: 产品需符合“ROHS”标准 UNMARKED FILLET RADIUS: R=0.5
  - 9: “\*”为重点尺寸, “()”为参考尺寸

由 Autodesk 教育版产品制作

**RX** Reshine Display (HK) Technology Co., Limited

DRAWN	ANCE	DRAWING NO.	DESCRIPTION	UNIT: mm	PAGE 1/1
CHECKED		RXL050020-A	LCM OUTLINE		
APPROVED					