




1	GND
2	D0-
3	D0+
4	GND
5	D1-
6	D1+
7	GND
8	CLK-
9	CLK+
10	GND
11	D2-
12	D2+
13	GND
14	D3-
15	D3+
16	GND
17	BLU_P/W/M
18	/RST
19	TE
20	VCI
21	IDVCC
22	GND
23	LED+
24	LED-
25	GND

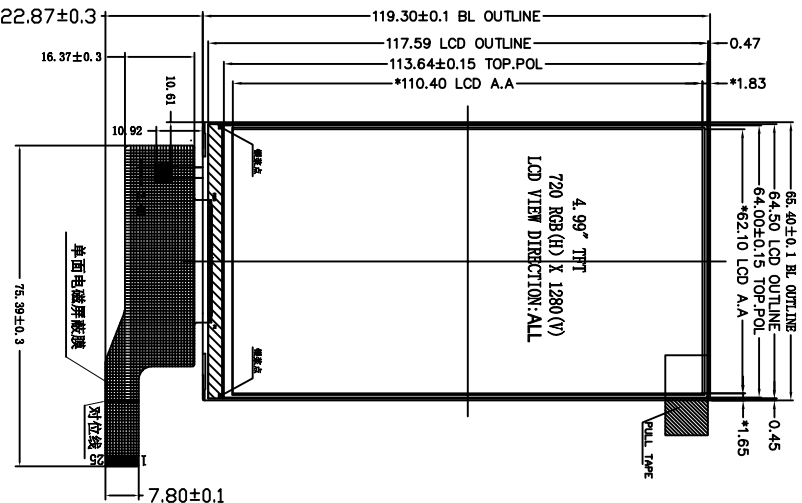

connector P/N: FP270H-025G1AM

If=40mA, Vf=19.2V (TYP)
backlight circuit



ISSUE	AMENDMENT	DATE
Δ1	New Version	18.01.08

DISPLA TYPE	TFT, TRANSPARENT
DISPLAY RESOLUTION	16.7M COLOR 720X RGB X 1080
VIEWING ANGLE	ALL
LED CONTROLLER/DRIVER	~
LOGIC VOLTAGE/ANALOGIC	~2.8V
OPERATING TEMPERATURE	-20°C TO +70°C
STORAGE TEMPERATURE	-30°C TO +80°C
BACKLIGHT	LEDOS12 pins LED Color: White DRIVING VOLTAGE: ~19.2V@40mA Min. --- Typ. 300 Max. ---
LUMINANCE (SURFACE) (cd/m ²)	Min. --- Typ. 300 Max. ---

R X X
Resiline Display (HK) Technology Co., Limited

SCALE: 1:1
NOT TO SCALE
PAGE: 1 OF 1
GENERAL TOL. 0.50mm
UNITS MM
DATE
Tel: 0755-29190292 Fax: 0755-29190291

MODEL NUMBER: RXL050025-A

DATE: 2018-01-08

APP: APPROVALS

CHK: DMN: YANH 2018-01-08